



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 245G B-144 (S/N 1FF245GXCMF802178)
 Component
Swing Drive
 Fluid
JOHN DEERE GL-5 80W90 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225675	JR0217857	JR0211195
Sample Date		Client Info		08 Jul 2024	23 May 2024	05 Apr 2024
Machine Age	hrs	Client Info		4815	4554	4309
Oil Age	hrs	Client Info		4815	4316	238
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		47	47	39
Iron	ppm	ASTM D5185m	>151	102	72	53
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	<1	2	2
Lead	ppm	ASTM D5185m	>51	<1	<1	0
Copper	ppm	ASTM D5185m	>51	1	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	8	6	6
Potassium	ppm	ASTM D5185m	>20	1	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	1	0	0
Boron	ppm	ASTM D5185m		10	12	11
Barium	ppm	ASTM D5185m		<1	5	4
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		2	<1	<1
Magnesium	ppm	ASTM D5185m		4	5	3
Calcium	ppm	ASTM D5185m		59	84	21
Phosphorus	ppm	ASTM D5185m		567	574	593
Zinc	ppm	ASTM D5185m		19	39	20
Sulfur	ppm	ASTM D5185m		23133	21049	21006
Visc @ 40°C	cSt	ASTM D445		141	142	144

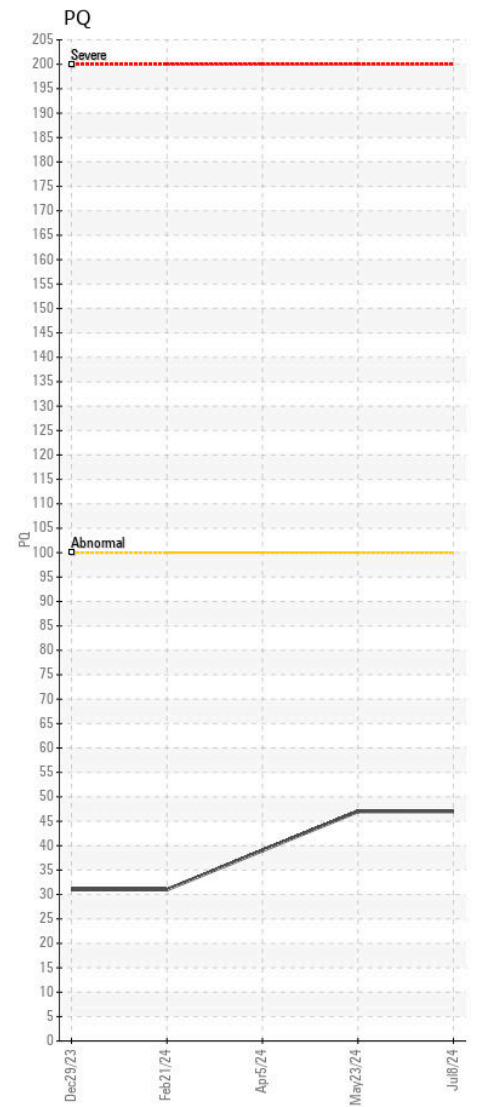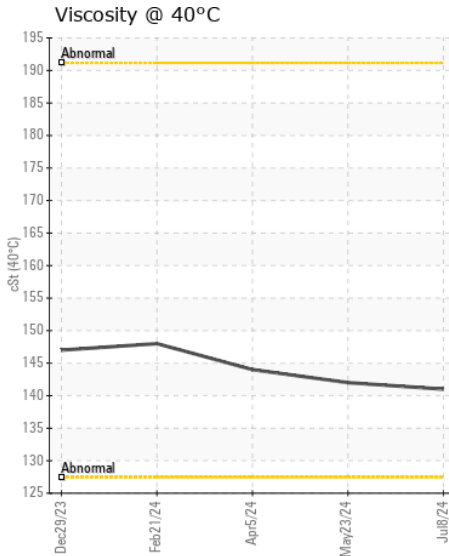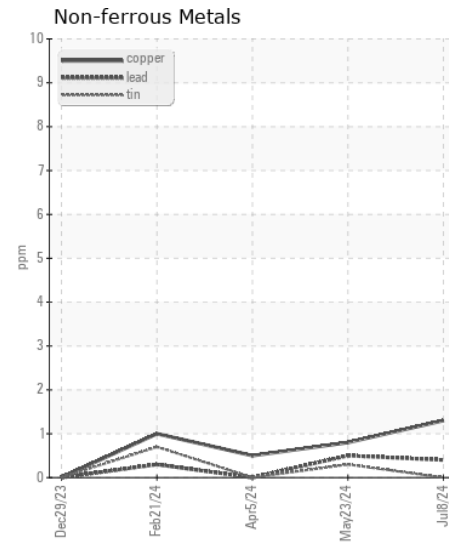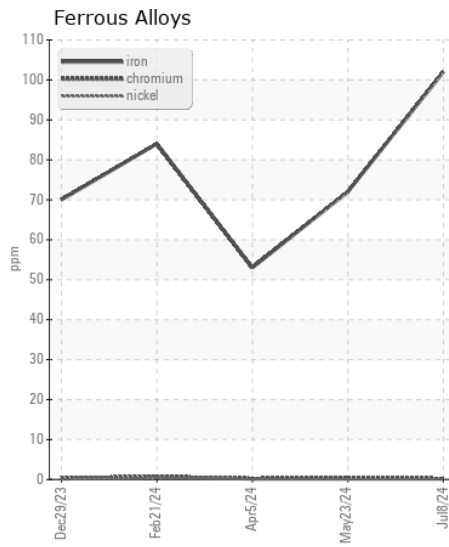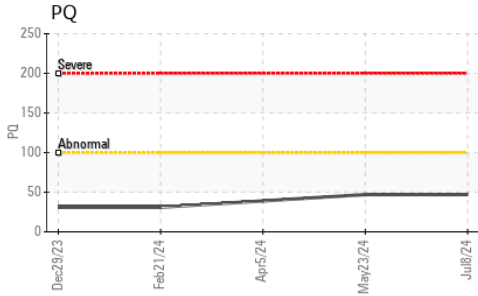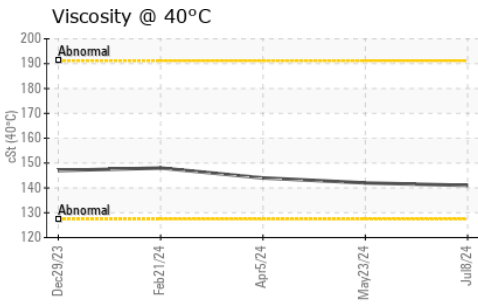

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225675 **Received** : 09 Jul 2024
Lab Number : 06231779 **Tested** : 10 Jul 2024
Unique Number : 11115272 **Diagnosed** : 11 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

PLEASANT CONSTRUCTION INC
 24024 FREDERICK RD
 CLARKSBURG, MD
 US 20871
 Contact: HERBIE TRENT

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (301)502-0163

F: