



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 844L 1DW844LXVLF705255**  
 Component  
**Front Differential**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225441</b>	JR0192386	JR0174804
Sample Date		Client Info		<b>08 Jul 2024</b>	21 Nov 2023	01 Jun 2023
Machine Age	hrs	Client Info		<b>4962</b>	4464	3988
Oil Age	hrs	Client Info		<b>4486</b>	476	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>36</b>	30	40
Iron	ppm	ASTM D5185m	>500	<b>63</b>	42	96
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m	>25	<b>4</b>	2	3
Copper	ppm	ASTM D5185m	>100	<b>86</b>	55	▲ 153
Tin	ppm	ASTM D5185m	>10	<b>2</b>	1	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>MODER</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>8</b>	8	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	1	1
Boron	ppm	ASTM D5185m	6	<b>3</b>	5	6
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	4	3
Manganese	ppm	ASTM D5185m		<b>3</b>	2	3
Magnesium	ppm	ASTM D5185m	145	<b>100</b>	92	47
Calcium	ppm	ASTM D5185m	3570	<b>3391</b>	3141	2901
Phosphorus	ppm	ASTM D5185m	1290	<b>1157</b>	966	1073
Zinc	ppm	ASTM D5185m	1640	<b>1322</b>	1251	1328
Sulfur	ppm	ASTM D5185m		<b>4475</b>	3470	4430
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.1</b>	54.1	52.8

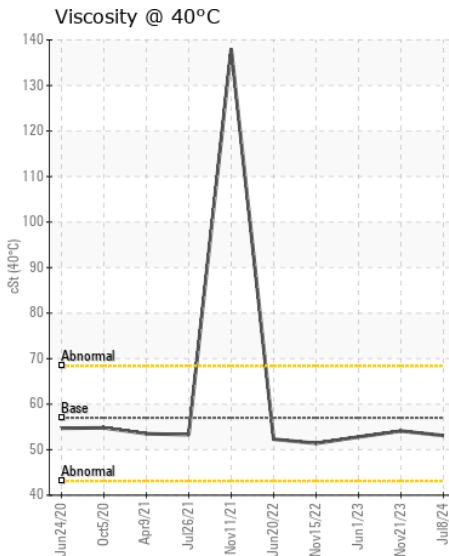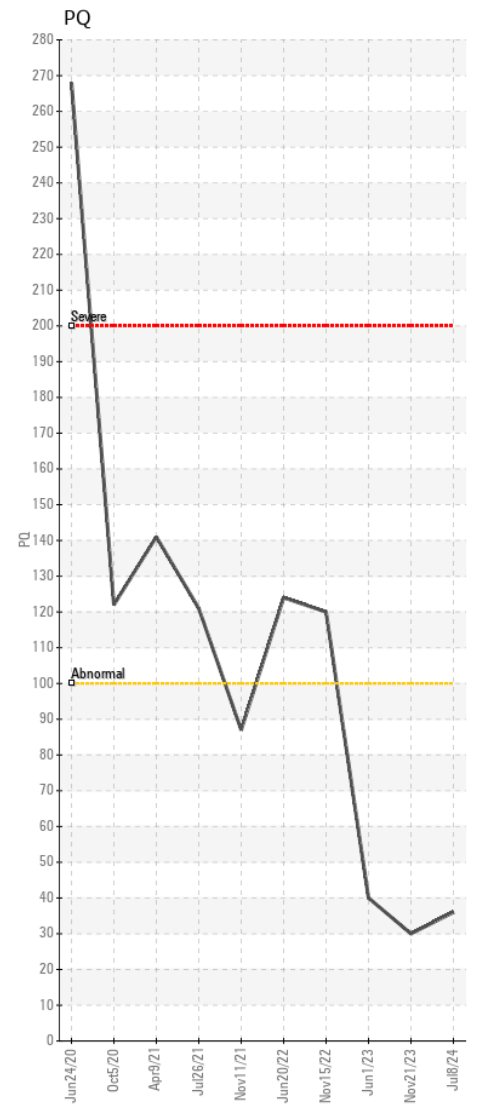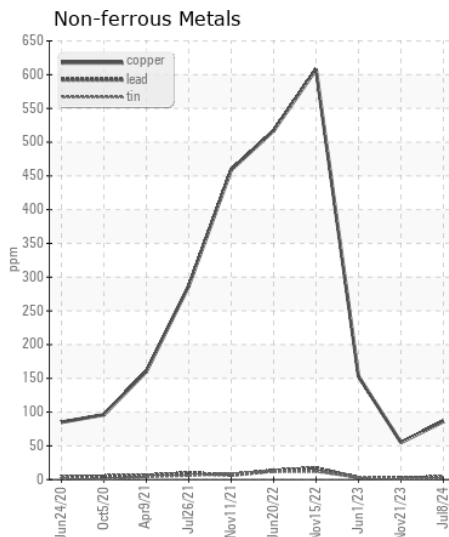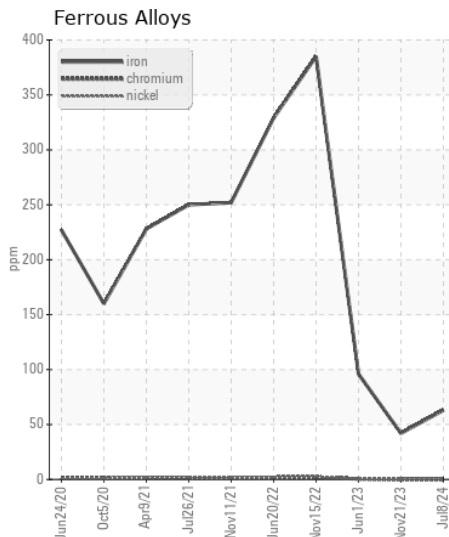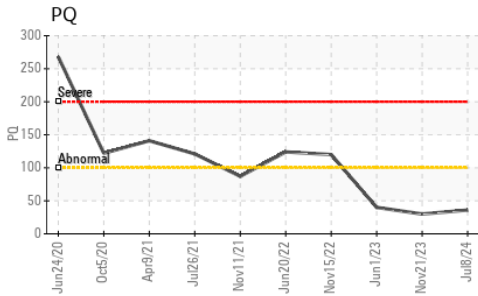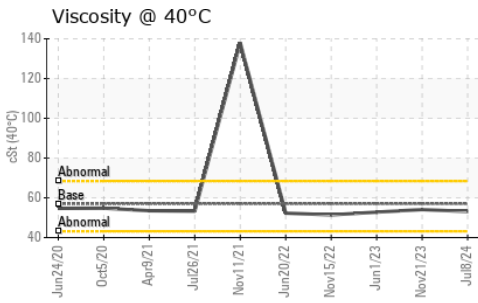

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225441 **Received** : 09 Jul 2024  
**Lab Number** : 06231780 **Tested** : 10 Jul 2024  
**Unique Number** : 11115273 **Diagnosed** : 11 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**SUPERIOR PAVING CORP**  
 5551 WELLINGTON RD  
 GAINESVILLE, VA  
 US 20155  
 Contact: TOM ECKLER  
 tomeckler@superiorpaving.net  
 T: (703)631-0004  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)