CORROSION
CONTAMINANTS
COOLANT CONDITION

NORMAL NORMAL NORMAL


[W9628]

JOHN DEERE 748L-II 1DW748LBTKF697253

Coolant

JOHN DEERE COOLGARD II (--- QTS)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
The fluid is suitable for further service.	Sample Number		Client Info		JR0225998		
	Sample Date		Client Info		05 Jul 2024		
	Machine Age	hrs	Client Info		8021		
	Oil Age	hrs	Client Info		0		
	Oil Changed		Client Info		Not Changd		
	Sample Status				NORMAL		
CORROSION	Total Dissolved Solids				301.0		
	Coolant Appearance		*Visual	Clear	normal		
CONTAMINANTS	Boiling Point	°C	WC Method		225		
There is no indication of any contamination in the coolant.	Specific Gravity		*ASTM D1298		1.067		
	рН	Scale 0-14	ASTM D1287		8.27		
	Nitrites	ppm	AP-053:2009		NT		
	Reserve Alkalinity	Scale 0-20	*ASTM D1121				
	Percentage Glycol	%	ASTM D3321		49.3		
	Freezing Point	°F	ASTM D3321		-33		
	Carboxylate				n/a		
	Coolant Color		*Visual		Yllow		

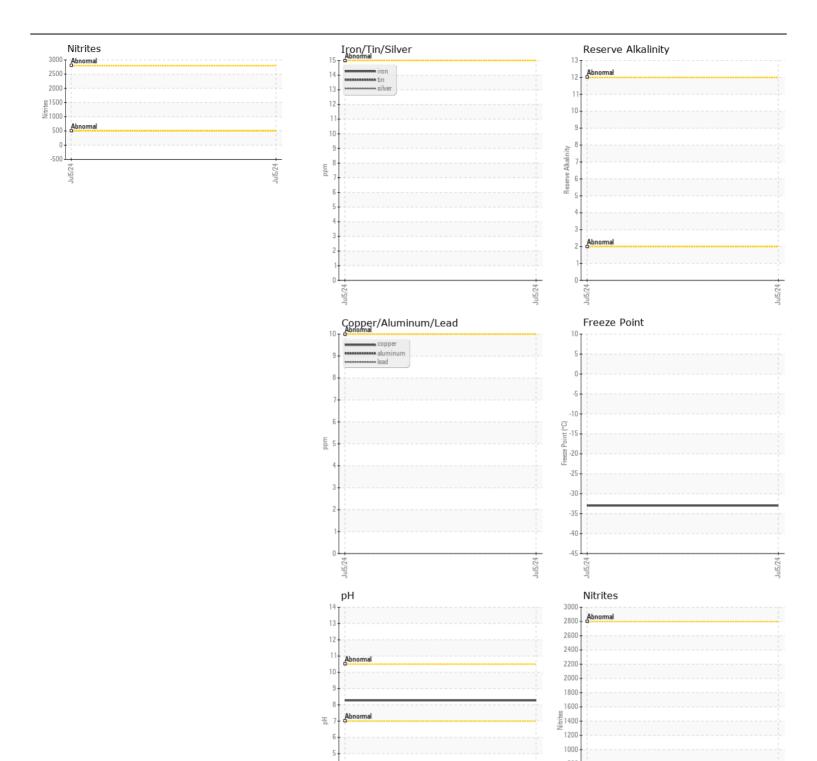





Certificate L2367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : JR0225998 Lab Number : 06231854 Unique Number : 11115347

Received **Tested**

Diagnosed Test Package : COOL- (Additional Tests: GlycolType, PQ)

: 09 Jul 2024 : 11 Jul 2024

: 11 Jul 2024 - Jonathan Hester

Contact: Service Manager

CONETOE LAND & TIMBER

3820 STEVENS MILL RD

GOLDSBORO, NC

US 27530

T:

F:

600 400 200

-200

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)