



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
139-371
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (44 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019700	RPL0019638	RPL0015317
Sample Date		Client Info		02 Jul 2024	29 Apr 2024	31 Oct 2023
Machine Age	mls	Client Info		472460	457562	326435
Oil Age	mls	Client Info		341333	457562	326435
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	40	23	17
Chromium	ppm	ASTM D5185m	>4	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		2	2	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	8	7	4
Lead	ppm	ASTM D5185m	>45	8	5	4
Copper	ppm	ASTM D5185m	>85	1	<1	<1
Tin	ppm	ASTM D5185m	>4	1	1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	9	6	6
Potassium	ppm	ASTM D5185m	>20	34	6	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	13.9	11.8	12.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.3	26.9	26.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	1	<1
Boron	ppm	ASTM D5185m		42	92	73
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		104	109	101
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		676	684	568
Calcium	ppm	ASTM D5185m		1792	1724	1745
Phosphorus	ppm	ASTM D5185m	1360	854	789	727
Zinc	ppm	ASTM D5185m	1480	1025	956	890
Sulfur	ppm	ASTM D5185m		3210	3145	2588
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.2	23.2	23.8
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	5.2	6.8	6.2
Visc @ 100°C	cSt	ASTM D445	15.1	14.6	14.2	14.2

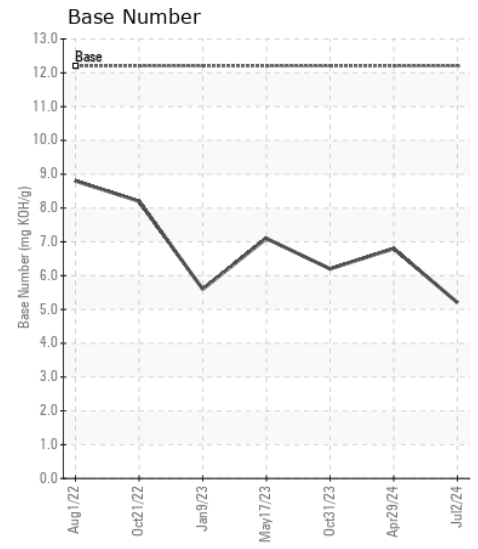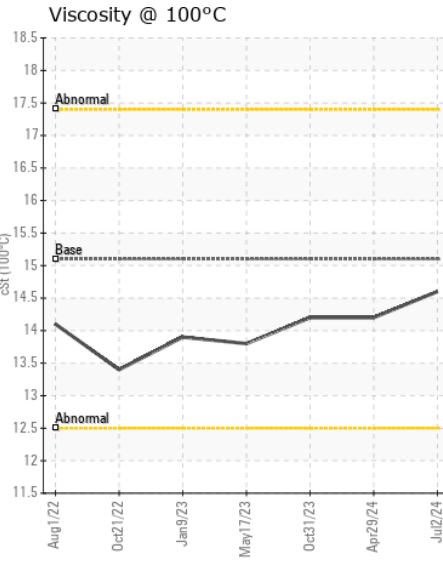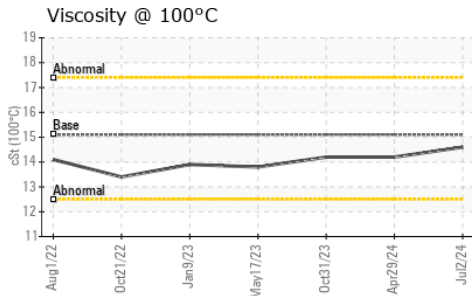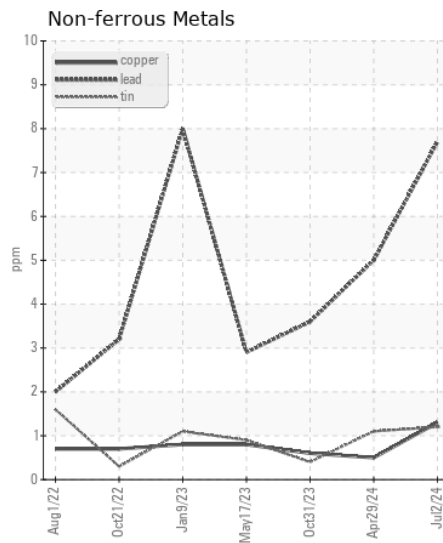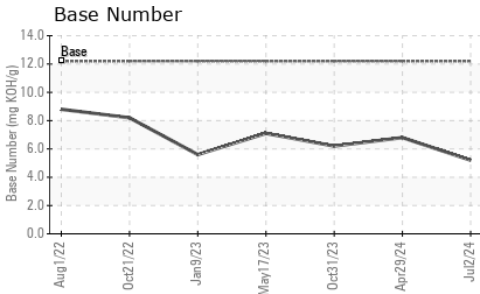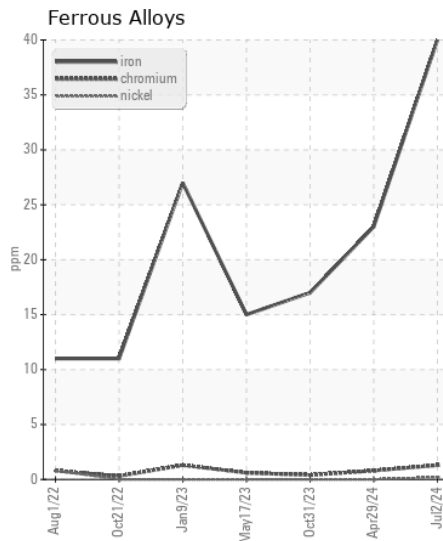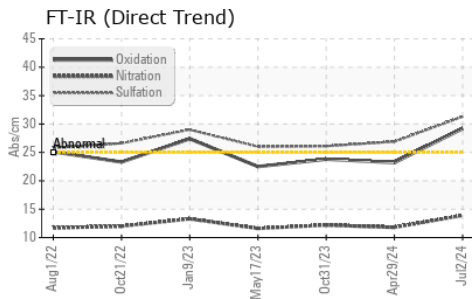

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0019700
Lab Number : 06231932
Unique Number : 11115425
Test Package : FLEET
Received : 10 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 11 Jul 2024 - Don Baldrige

RTL PACLEASE - 7005 - Arlington
 1900 E Division
 Arlington, TX
 US 76011
 Contact: Ricardo Ronquillo
 ronquillor@rushenterprises.com
 T: (469)203-8172
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)