



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
813-506
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019697	RPL0016750	RPL0016632
Sample Date		Client Info		02 Jul 2024	12 Apr 2024	01 Mar 2024
Machine Age	mls	Client Info		185729	169742	163504
Oil Age	mls	Client Info		165301	155552	158538
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	16	8	5
Chromium	ppm	ASTM D5185m	>4	0	<1	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	5	4	4
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>85	3	0	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	8	7	6
Potassium	ppm	ASTM D5185m	>20	5	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	11.3	9.5	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.7	23.9	23.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	1
Boron	ppm	ASTM D5185m		80	268	329
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		117	127	125
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		670	728	719
Calcium	ppm	ASTM D5185m		1545	1555	1604
Phosphorus	ppm	ASTM D5185m	1360	700	751	735
Zinc	ppm	ASTM D5185m	1480	840	866	847
Sulfur	ppm	ASTM D5185m		2995	2853	2649
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.0	19.7	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	6.0	8.0	9.0
Visc @ 100°C	cSt	ASTM D445	15.1	14.0	13.6	13.7


FT-IR (Direct Trend)

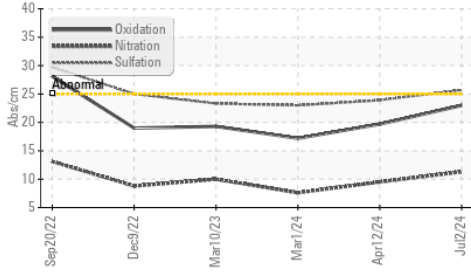


Ferrous Alloys

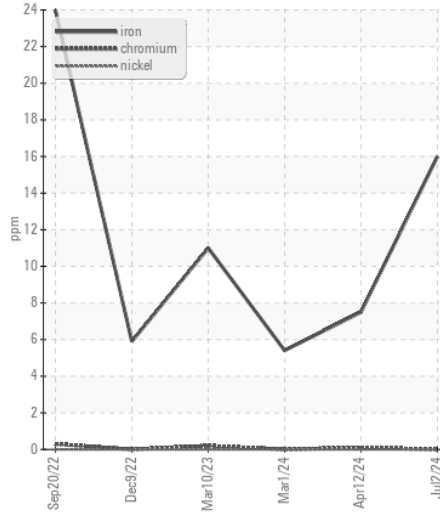


Base Number

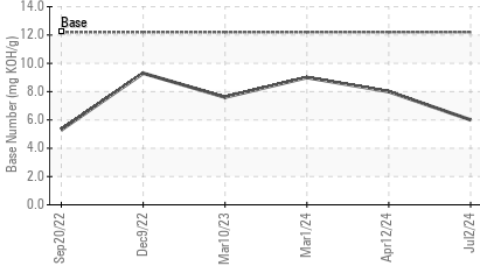


Non-ferrous Metals

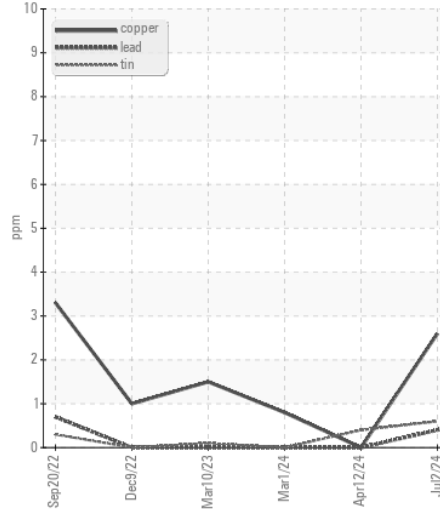


Viscosity @ 100°C

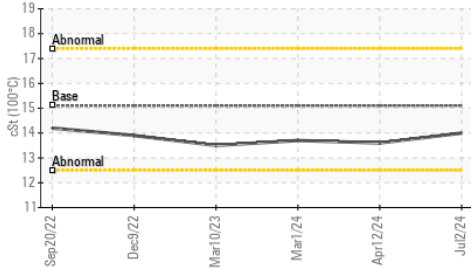

Viscosity @ 100°C

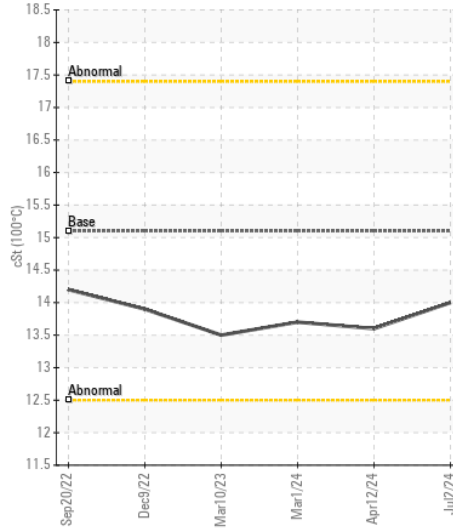

Base Number

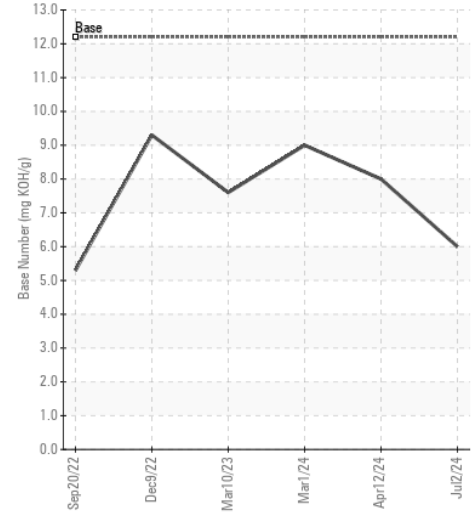

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019697

Lab Number : 06231949

Unique Number : 11115442

Test Package : FLEET

Received : 10 Jul 2024

Tested : 10 Jul 2024

Diagnosed : 10 Jul 2024 - Wes Davis

RTL PACLEASE - 7005 - Arlington

1900 E Division

Arlington, TX

US 76011

Contact: Ricardo Ronquillo

ronquillor@rushenterprises.com

T: (469)203-8172

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)