



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**1762**  
Component  
**Front Diesel Engine**  
Fluid  
**VALVOLINE PREMIUM BLUE GEN2 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0837740</b>	WC0837773	WC0694083
Sample Date		Client Info		<b>23 May 2024</b>	04 Nov 2023	03 Jul 2023
Machine Age	mls	Client Info		<b>730154</b>	638538	651688
Oil Age	mls	Client Info		<b>40000</b>	40000	29000
Filter Age	mls	Client Info		<b>40000</b>	40000	29000
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>41</b>	35	20
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>14</b>	9	3
Copper	ppm	ASTM D5185m	>330	<b>2</b>	1	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>8</b>	8	7
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	3	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.4</b>	12.7	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.5</b>	24.5	23.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>9</b>	5	7
Boron	ppm	ASTM D5185m		<b>22</b>	21	20
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>55</b>	54	63
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>770</b>	824	852
Calcium	ppm	ASTM D5185m		<b>1320</b>	1331	1331
Phosphorus	ppm	ASTM D5185m	800	<b>781</b>	704	703
Zinc	ppm	ASTM D5185m	890	<b>956</b>	1021	972
Sulfur	ppm	ASTM D5185m		<b>2774</b>	2376	2900
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>25.3</b>	24.7	21.6
Base Number (BN)	mg KOH/g	ASTM D2896	11	<b>4.4</b>	5.0	5.9
Visc @ 100°C	cSt	ASTM D445	12.0	<b>12.3</b>	12.2	11.7


**FT-IR (Direct Trend)**

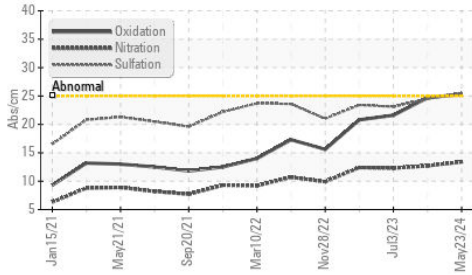


**Ferrous Alloys**

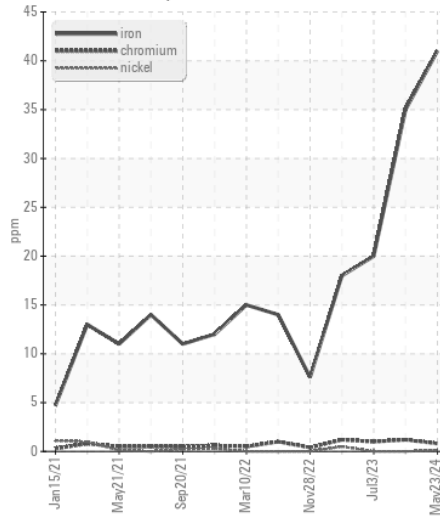


**Base Number**

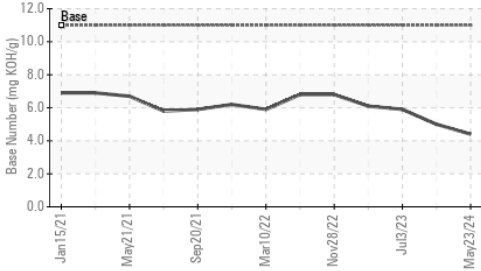


**Non-ferrous Metals**

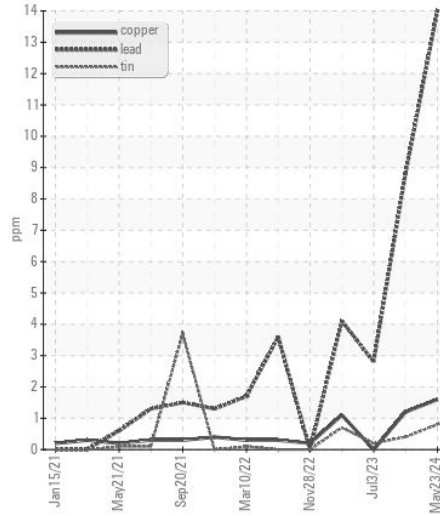


**Viscosity @ 100°C**

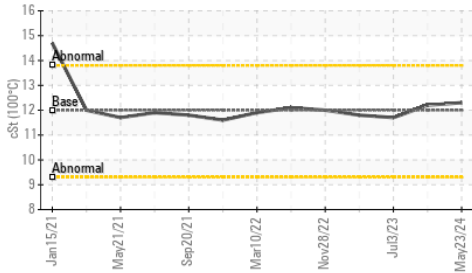

**Viscosity @ 100°C**

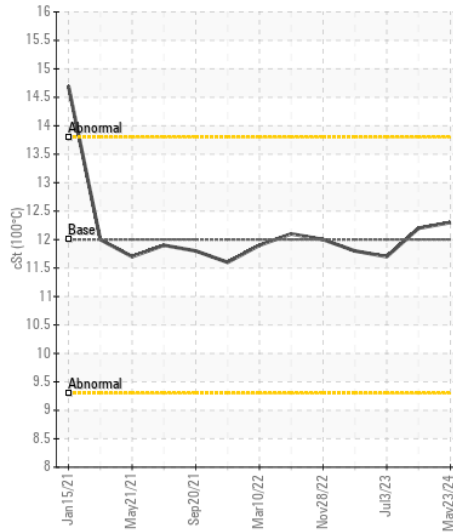

**Base Number**

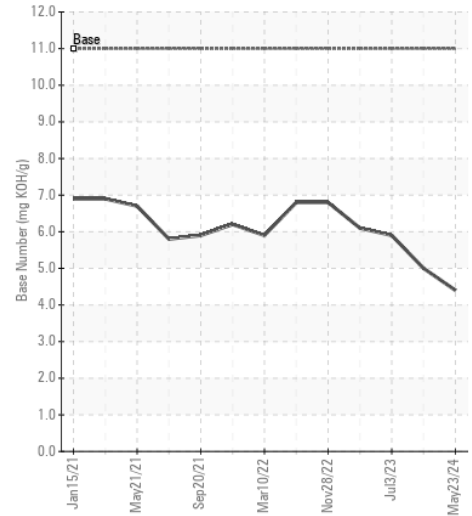

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0837740  
**Lab Number** : 06231980  
**Unique Number** : 11115473  
**Test Package** : FLEET

**LIBERTY LINEHAUL WEST INC**  
 1501 CHAPIN ROAD  
 MONTEBELLO, CA  
 US 90640  
 Contact: GREG DUBUQUE  
 greg@libertylinehaulwest.com  
 T: (323)728-8900  
 F: (323)728-8227

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)