



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W68231]

Machine Id
HITACHI 350LC 1FFDDR70CJF940555

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W68231)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220287	JR0178310	JR0150915
Sample Date		Client Info		09 Jul 2024	30 Aug 2023	20 Dec 2022
Machine Age	hrs	Client Info		8598	7644	6779
Oil Age	hrs	Client Info		954	7109	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	33	3	12
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	16	4	9
Lead	ppm	ASTM D5185m	>40	5	0	<1
Copper	ppm	ASTM D5185m	>330	3	0	1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	8	6
Potassium	ppm	ASTM D5185m	>20	10	0	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.5	0	1.1
Nitration	Abs/cm	*ASTM D7624	>20	10.2	5.9	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.6	18.1	24.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		24	1	<1
Boron	ppm	ASTM D5185m		140	371	237
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		265	261	246
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		806	896	779
Calcium	ppm	ASTM D5185m		1433	1433	1463
Phosphorus	ppm	ASTM D5185m		876	948	885
Zinc	ppm	ASTM D5185m		1092	1107	1050
Sulfur	ppm	ASTM D5185m		2930	3741	3360
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.1	12.7	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.5	9.5	9.9
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.4	14.5

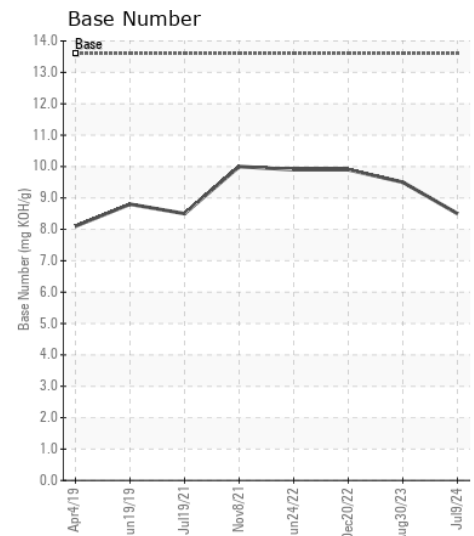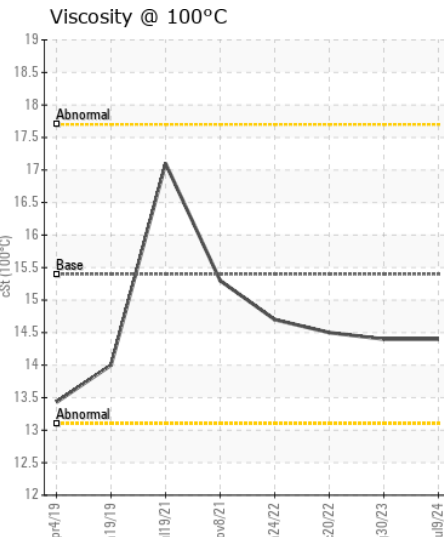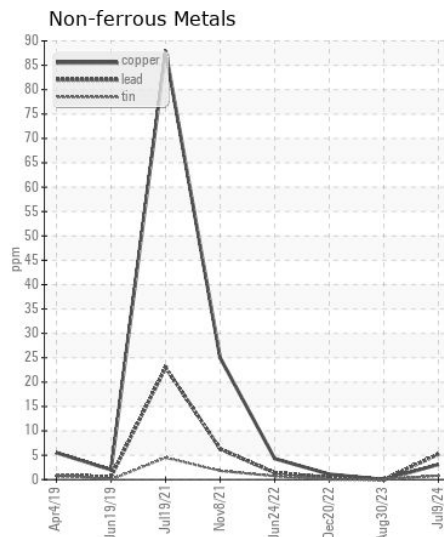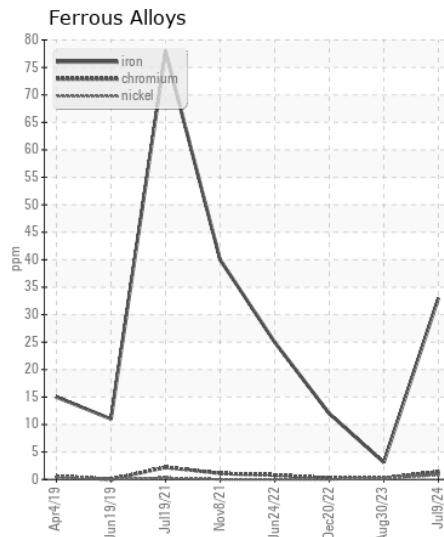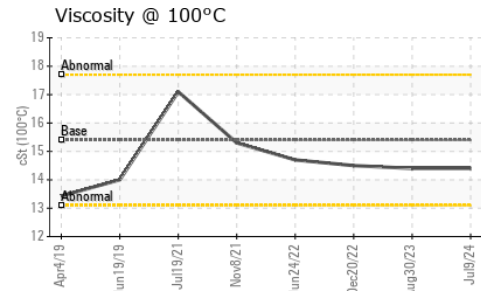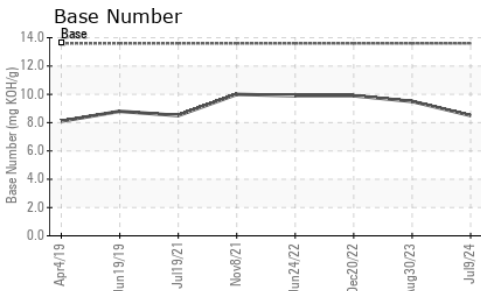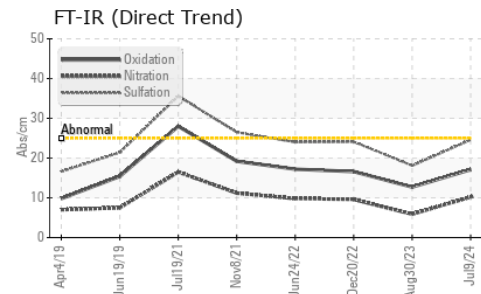

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220287 **Received** : 10 Jul 2024
Lab Number : 06232041 **Tested** : 11 Jul 2024
Unique Number : 11115534 **Diagnosed** : 11 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198