



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
523
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034702	DC0029597	---
Sample Date		Client Info		08 Mar 2024	28 Sep 2023	---
Machine Age	mls	Client Info		600768	0	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	29	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>4	<1	1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	0	---
Lead	ppm	ASTM D5185m	>40	1	4	---
Copper	ppm	ASTM D5185m	>330	3	9	---
Tin	ppm	ASTM D5185m	>15	<1	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	5	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	20.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	0	---
Boron	ppm	ASTM D5185m	250	36	11	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	27	15	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	320	204	---
Calcium	ppm	ASTM D5185m	3000	1819	2100	---
Phosphorus	ppm	ASTM D5185m	1150	775	877	---
Zinc	ppm	ASTM D5185m	1350	949	1090	---
Sulfur	ppm	ASTM D5185m	4250	2878	3369	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	14.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	6.4	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	13.4	---

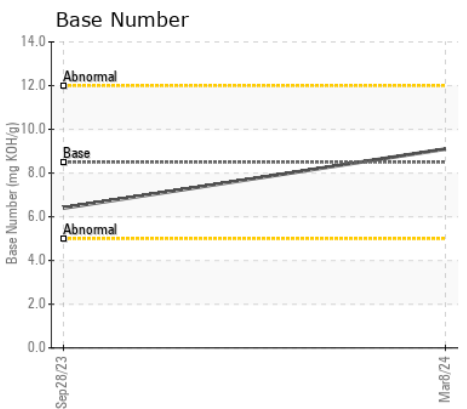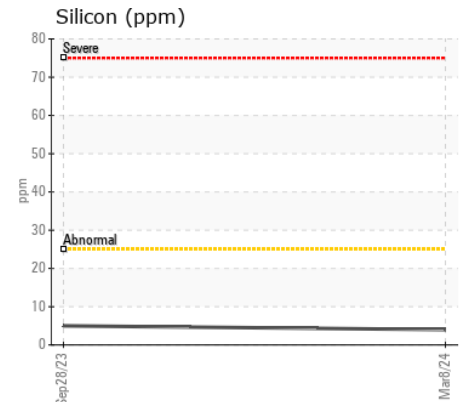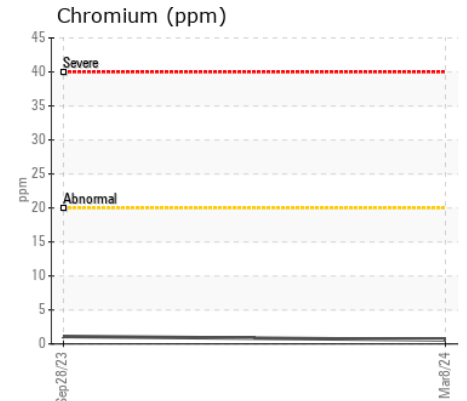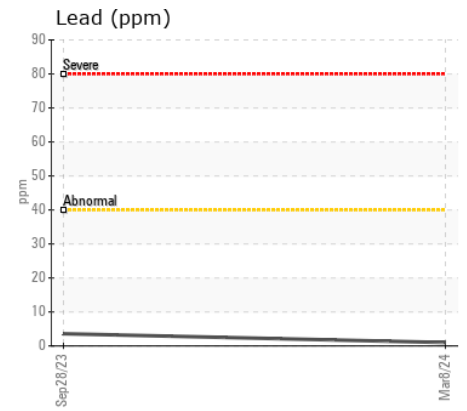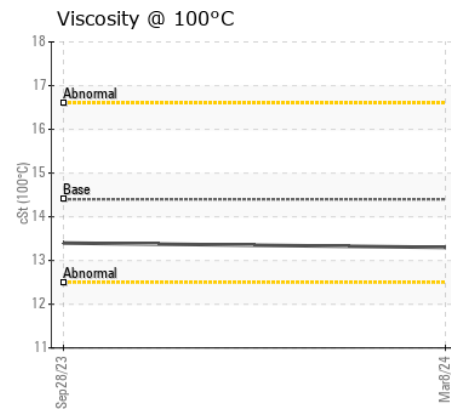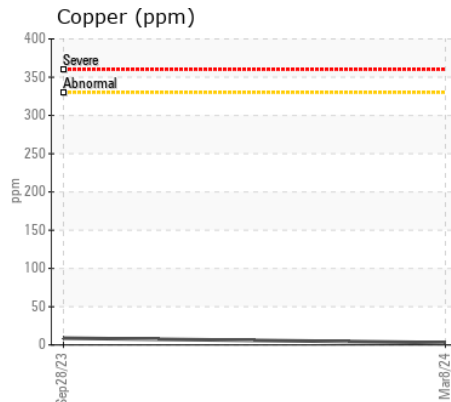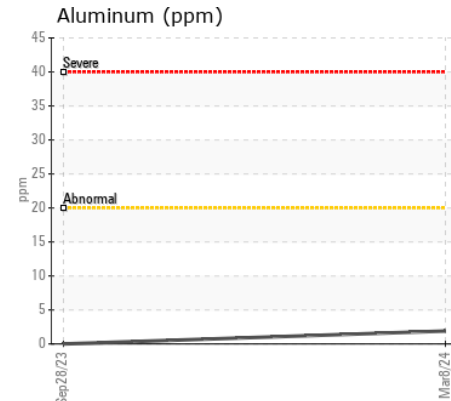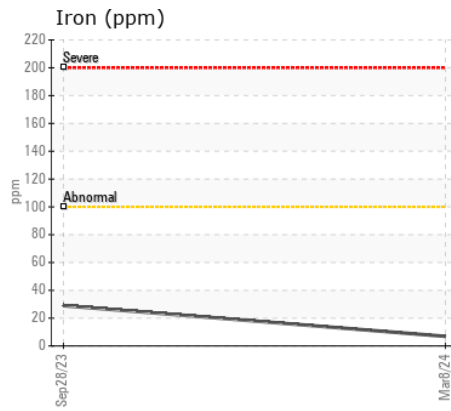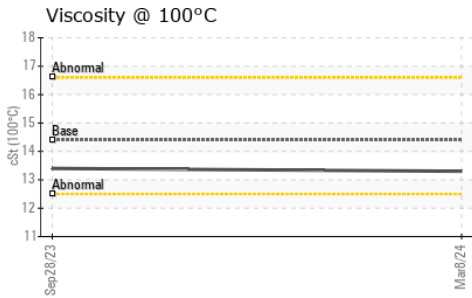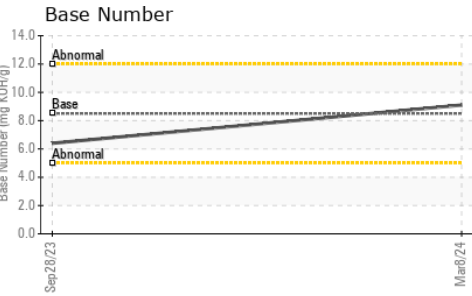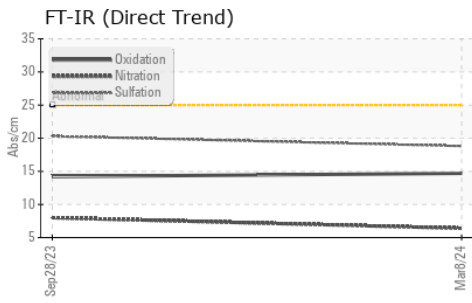

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0034702 **Received** : 10 Jul 2024
Lab Number : 06232087 **Tested** : 11 Jul 2024
Unique Number : 11115580 **Diagnosed** : 11 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

FRANCIS O DAY
 14900 SOUTHLAWN LN
 ROCKVILLE, MD
 US 20850
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: