



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**56919**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0036015</b>	DC0036030	DC0034864
Sample Date		Client Info		<b>11 Jun 2024</b>	10 Apr 2024	30 Jan 2024
Machine Age	hrs	Client Info		<b>3450</b>	3109	2865
Oil Age	hrs	Client Info		<b>300</b>	150	400
Filter Age	hrs	Client Info		<b>300</b>	150	400
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>5</b>	3	4
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	5.7	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.5</b>	15.5	15.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	0	0
Boron	ppm	ASTM D5185m	250	<b>3</b>	4	4
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>3</b>	2	3
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>42</b>	61	45
Calcium	ppm	ASTM D5185m	3000	<b>2200</b>	2318	2197
Phosphorus	ppm	ASTM D5185m	1150	<b>807</b>	897	907
Zinc	ppm	ASTM D5185m	1350	<b>998</b>	1048	1037
Sulfur	ppm	ASTM D5185m	4250	<b>3378</b>	4115	4099
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.5</b>	9.6	9.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.3</b>	7.3	7.1
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.6</b>	12.9	12.5

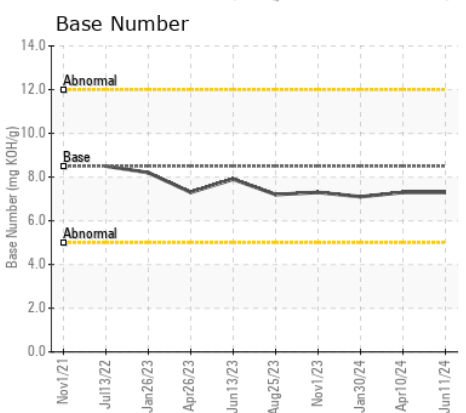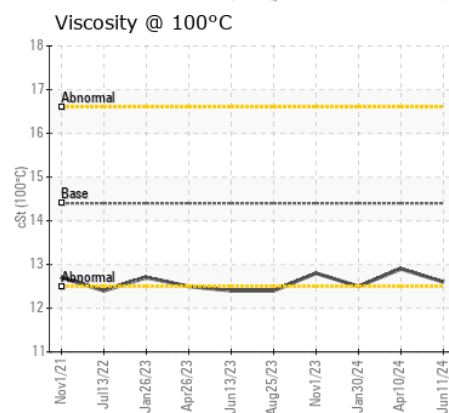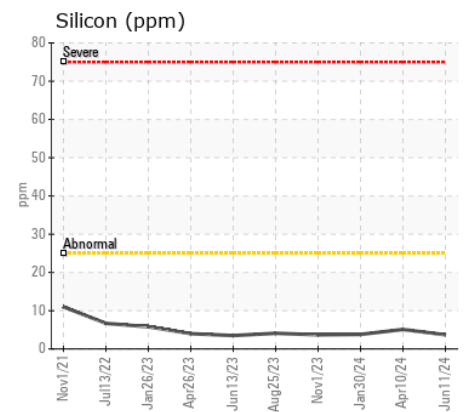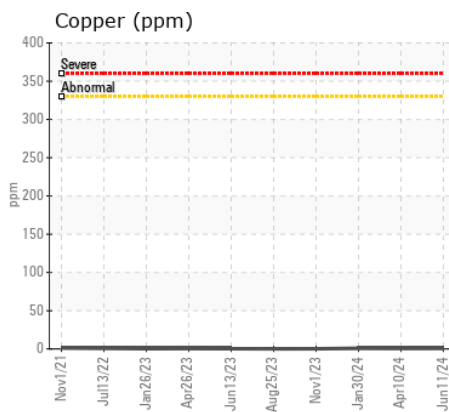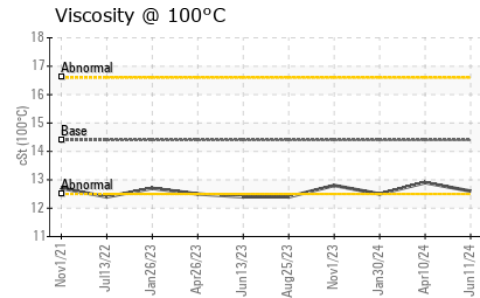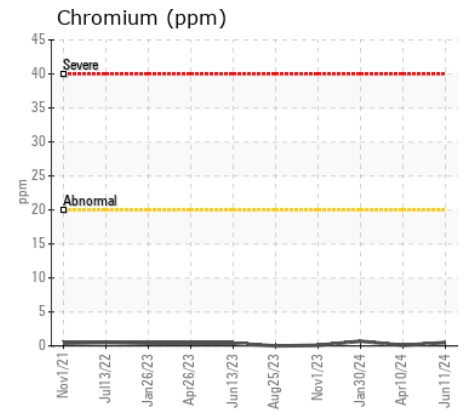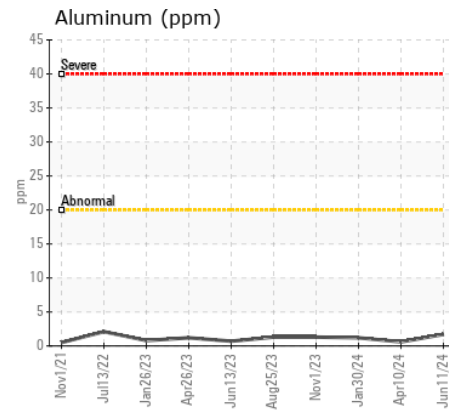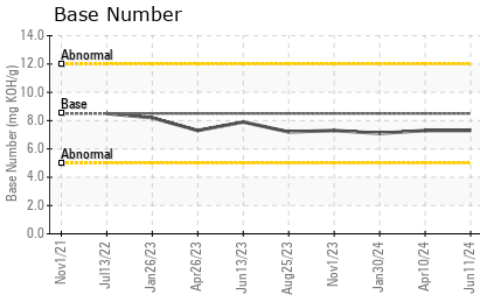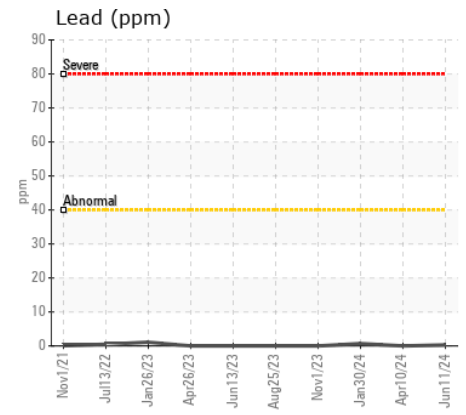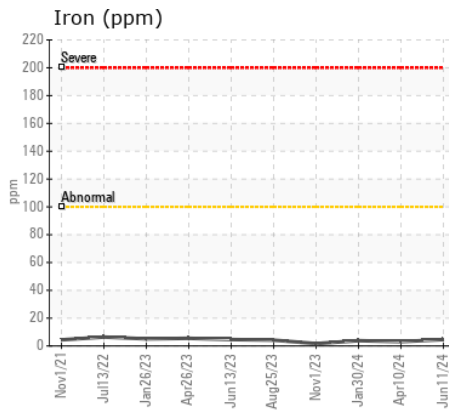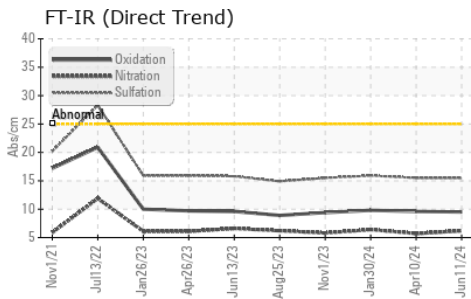

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0036015 **Received** : 10 Jul 2024  
**Lab Number** : 06232091 **Tested** : 11 Jul 2024  
**Unique Number** : 11115584 **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**FRANCIS O DAY**  
 14900 SOUTHLAWN LN  
 ROCKVILLE, MD  
 US 20850  
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: