
WEAR CONTAMINATION FLUID CONDITION

NORMAL NORMAL

Machine Id
55827
Component

Component
Diesel Engine

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
RECOMMENDATION	Sample Number	OOW	Client Info	LIIIIII/ADII	DC0036305	DC0036005	DC0031795
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Date		Client Info		27 Jun 2024	10 May 2024	08 Nov 2023
	Machine Age	hrs	Client Info		1047	913	687
	Oil Age	hrs	Client Info		150	200	250
	Filter Age	hrs	Client Info		0	200	250
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	NORMAL
WEAR	Iron	ppm	ASTM D5185m	>100	5	5	4
WEAT	Chromium	ppm	ASTM D5185m		<1	0	<1
All component wear rates are normal.	Nickel	ppm	ASTM D5185m		<1	<1	0
	Titanium	ppm	ASTM D5185m	- 1	<1	0	0
	Silver	ppm	ASTM D5185m	>3	0	0	0
	Aluminum	ppm	ASTM D5185m		2	1	1
	Lead	ppm	ASTM D5185m		- <1	0	0
	Copper	ppm	ASTM D5185m		2	3	5
	Tin	ppm	ASTM D5185m		<1	<1	0
	Vanadium	ppm	ASTM D5185m		<1	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	4	4	4
CONTAININATION	Potassium	ppm	ASTM D5185m		3	3	1
There is no indication of any contamination in the oil.	Fuel	ррпп	WC Method	>5	<1.0	<1.0	<1.0
	Water		WC Method		NEG	NEG	NEG
	Glycol		WC Method	7 U.L	NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
	Nitration	Abs/cm	*ASTM D7624	>20	6.8	7.2	7.2
	Sulfation	Abs/.1mm	*ASTM D7415		16.5	17.0	17.4
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORM
	Odor	scalar	*Visual	NORML	NORML	NORML	NORM
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	2	1	1
	Boron	ppm	ASTM D5185m	250	3	2	2
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m	100	3	2	1
	Manganese	ppm	ASTM D5185m		<1	<1	<1
	Magnesium	ppm	ASTM D5185m	450	42	54	51
	Calcium	ppm	ASTM D5185m	3000	2276	2399	2356
	Phosphorus	ppm	ASTM D5185m	1150	869	952	953
	Zinc	ppm	ASTM D5185m	1350	1052	1107	1145
	Sulfur	ppm	ASTM D5185m	4250	3728	4261	3835
	Oxidation	Abs/.1mm	*ASTM D7414		10.0	10.2	10.6
	Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.0	7.1	6.8
	Visc @ 100°C	cSt	ASTM D445	4 4 4	13.5	13.7	13.7

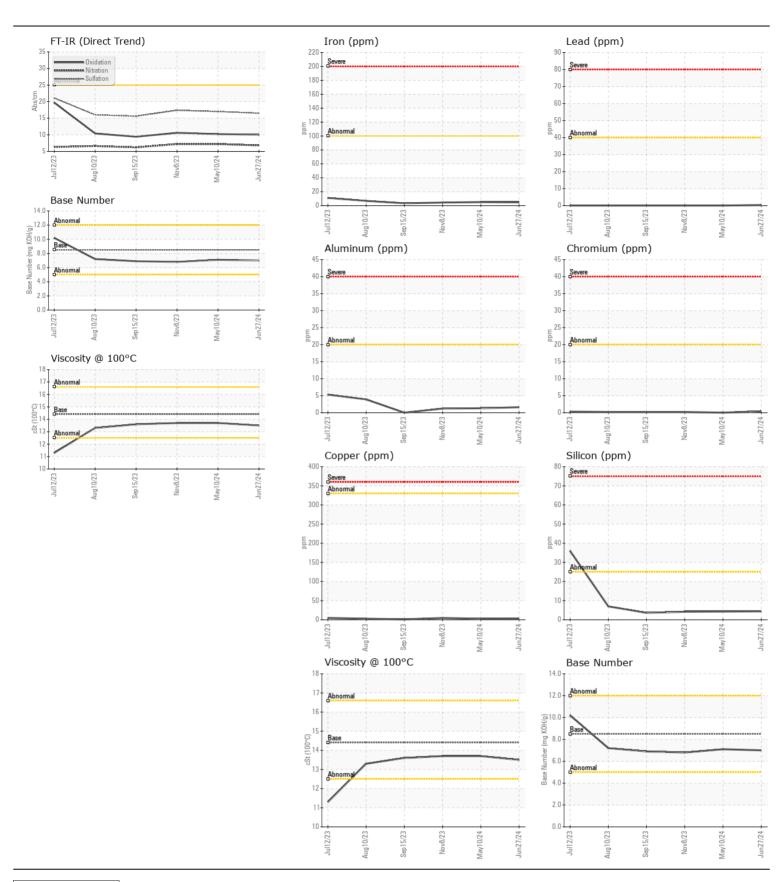



Certificate L2367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : DC0036305 Lab Number : 06232106

Unique Number: 11115599

Received : 10 Jul 2024 **Tested** Diagnosed

: 11 Jul 2024 Test Package : MOB 1 (Additional Tests: TBN)

: 11 Jul 2024 - Wes Davis

FRANCIS O DAY 14900 SOUTHLAWN LN ROCKVILLE, MD US 20850 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: