



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 130G 1FF130GXAJF042099
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222437	JR0113196	---
Sample Date		Client Info		03 Jul 2024	15 Dec 2021	---
Machine Age	hrs	Client Info		2171	1386	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	15	17	---
Iron	ppm	ASTM D5185m	>32	7	5	---
Chromium	ppm	ASTM D5185m	>9	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>9	<1	<1	---
Lead	ppm	ASTM D5185m	>28	0	0	---
Copper	ppm	ASTM D5185m	>50	<1	<1	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	2	<1	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	7069	4841	---
Particles >6µm		ASTM D7647	>20000	799	394	---
Particles >14µm		ASTM D7647	>640	41	27	---
Particles >21µm		ASTM D7647	>160	9	5	---
Particles >38µm		ASTM D7647	>40	1	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/17/13	19/16/12	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	1	0	---
Boron	ppm	ASTM D5185m		<1	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		7	0	---
Calcium	ppm	ASTM D5185m		70	2	---
Phosphorus	ppm	ASTM D5185m	827	432	427	---
Zinc	ppm	ASTM D5185m	0	36	19	---
Sulfur	ppm	ASTM D5185m	13	357	100	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.13	0.127	---
Visc @ 40°C	cSt	ASTM D445	47	47.0	47.39	---

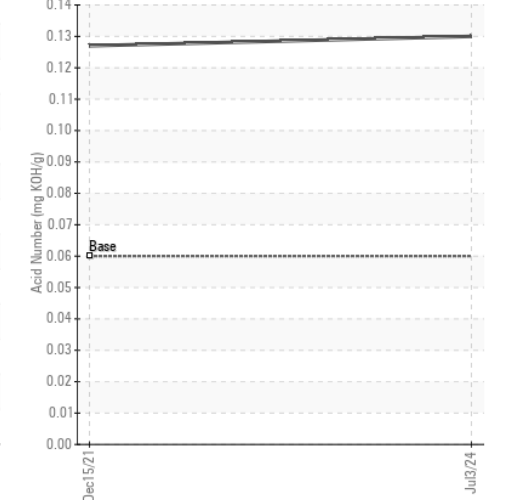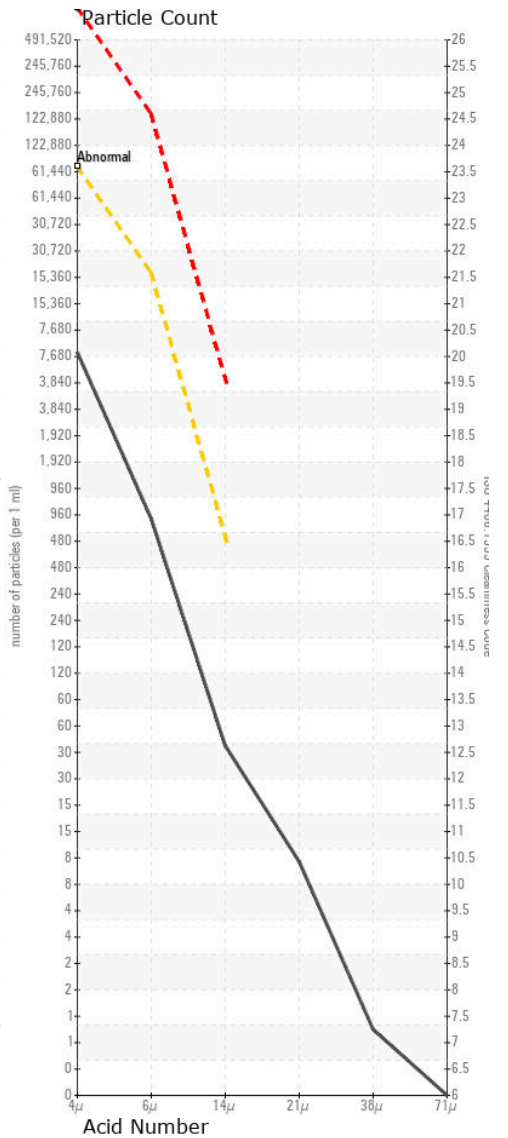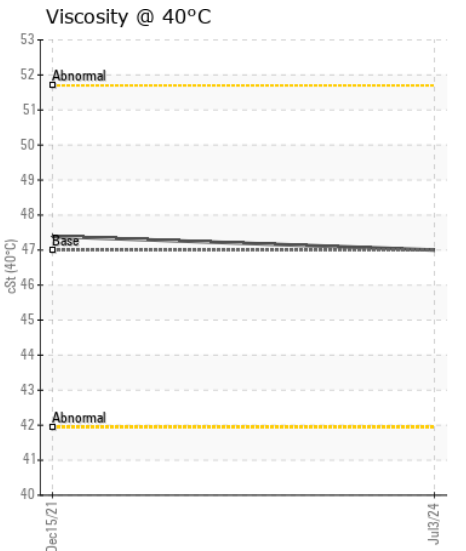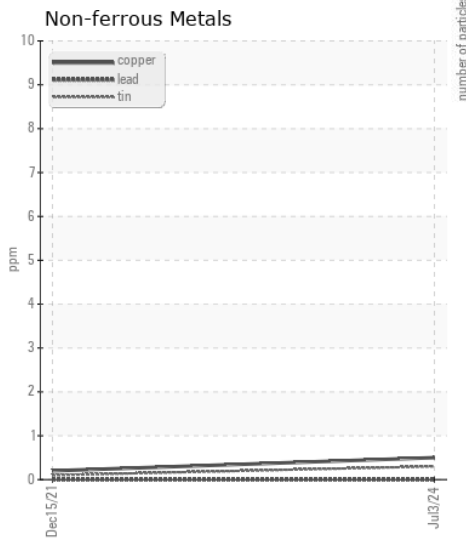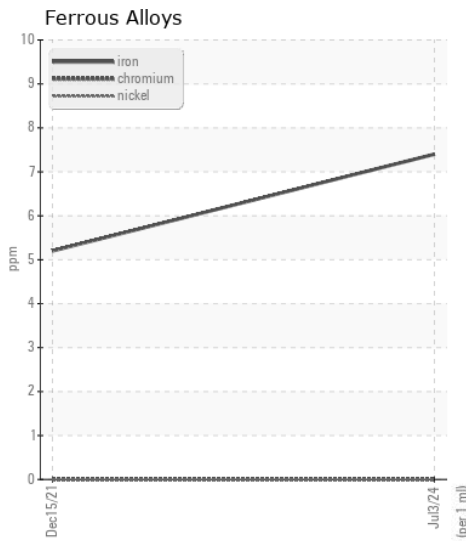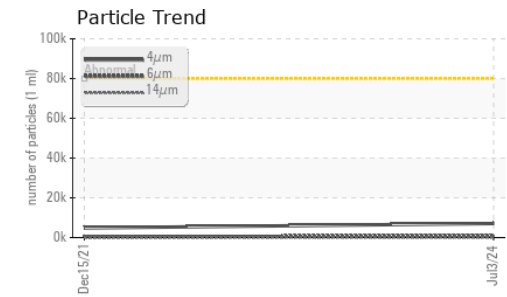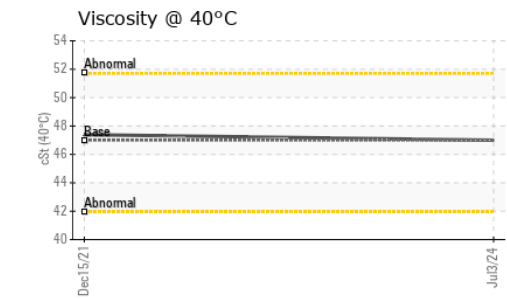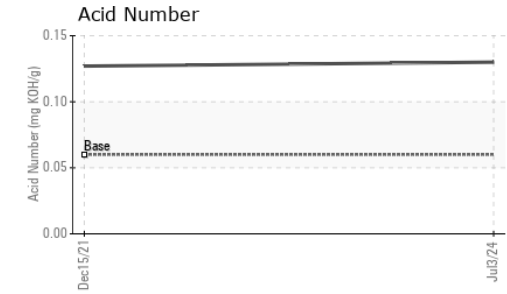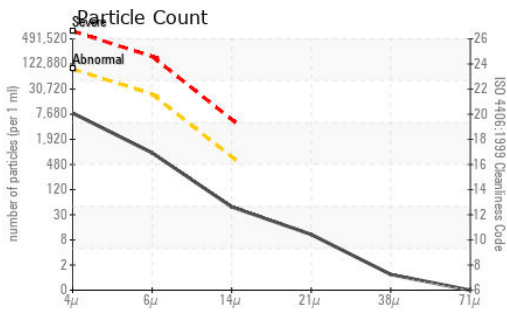

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222437 **Received** : 10 Jul 2024
Lab Number : 06232174 **Tested** : 11 Jul 2024
Unique Number : 11115667 **Diagnosed** : 11 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)