



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 750L 6X15 (S/N 1T0750LXLNF429335)**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197114</b>	JR0141085	---
Sample Date		Client Info		<b>08 Jul 2024</b>	25 Jul 2023	---
Machine Age	hrs	Client Info		<b>118</b>	24	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>74</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	N/A	---
Filter Changed		Client Info		<b>Not Changd</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>2</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>75	<b>3</b>	2	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>2975</b>	▲ 18494	---
Particles >6µm		ASTM D7647	>1300	<b>435</b>	● 2155	---
Particles >14µm		ASTM D7647	>160	<b>16</b>	62	---
Particles >21µm		ASTM D7647	>40	<b>3</b>	11	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/16/11</b>	▲ 21/18/13	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Boron	ppm	ASTM D5185m	6	<b>2</b>	0	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	145	<b>4</b>	0	---
Calcium	ppm	ASTM D5185m	3570	<b>154</b>	162	---
Phosphorus	ppm	ASTM D5185m	1290	<b>733</b>	655	---
Zinc	ppm	ASTM D5185m	1640	<b>903</b>	932	---
Sulfur	ppm	ASTM D5185m		<b>2114</b>	2132	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	<b>0.75</b>	0.79	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>60.1</b>	60.9	---

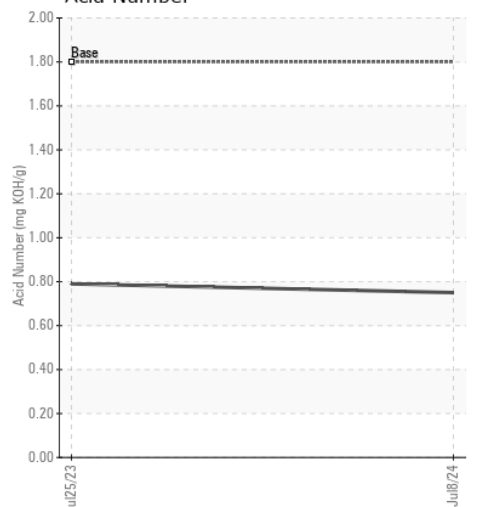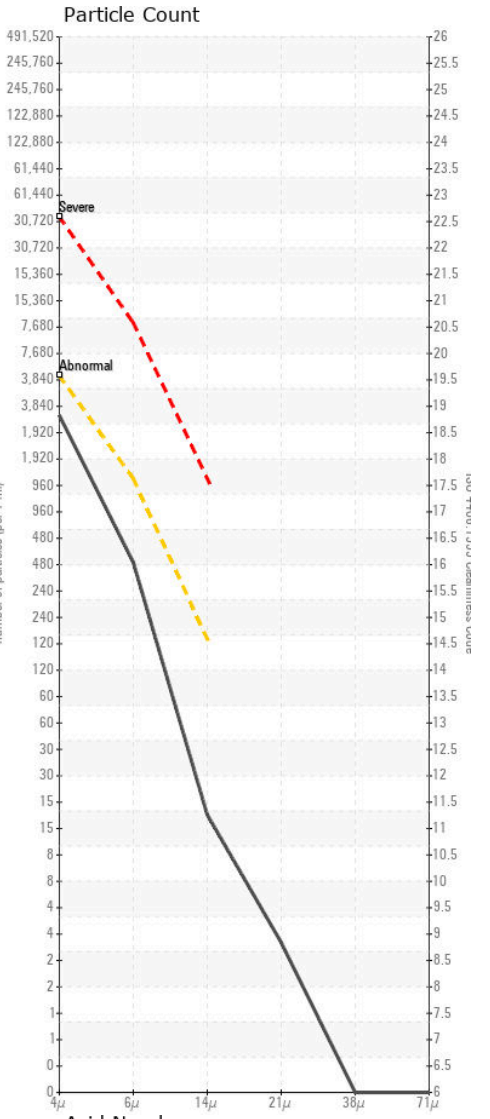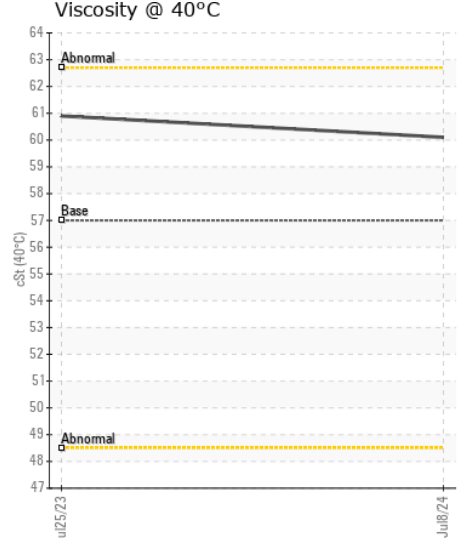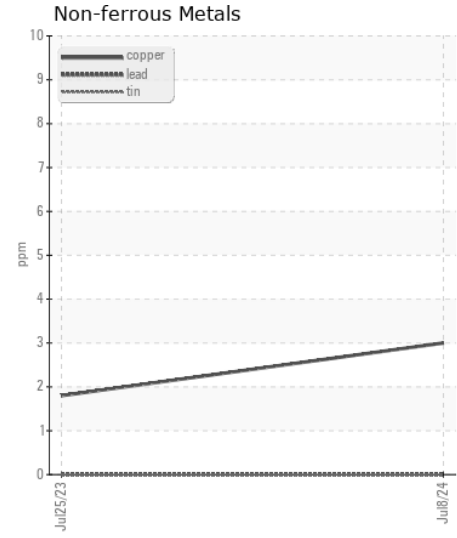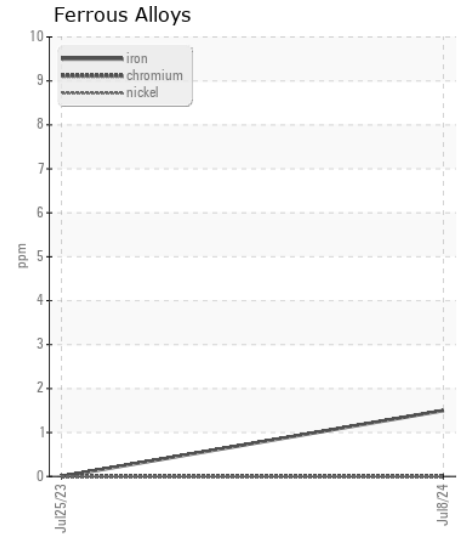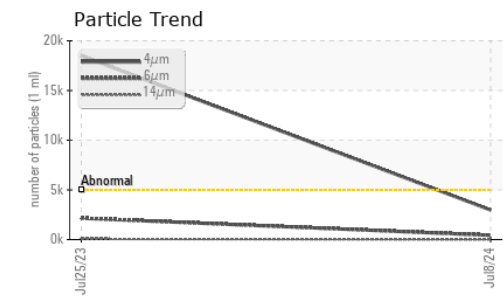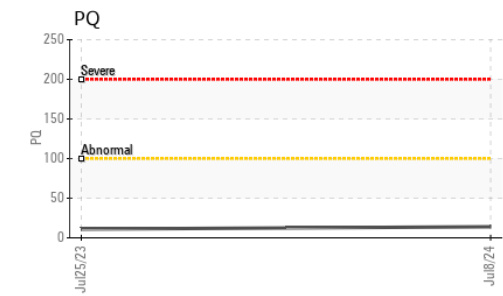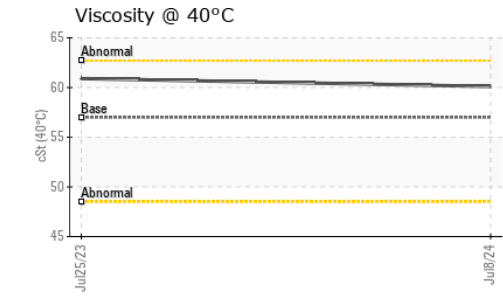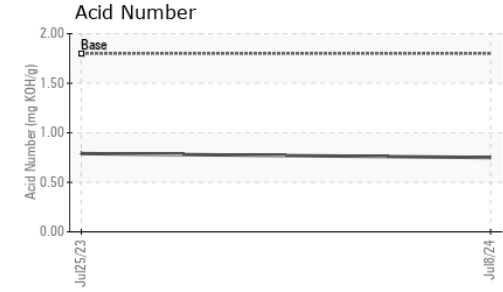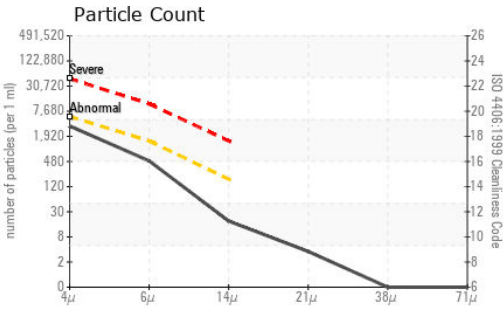

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0197114 **Received** : 10 Jul 2024  
**Lab Number** : 06232197 **Tested** : 11 Jul 2024  
**Unique Number** : 11115690 **Diagnosed** : 11 Jul 2024 - Don Baldrige  
**Test Package** : MOBCE ( Additional Tests: PQ )

**NC FOREST SERVICE**  
 221 AIRPORT RD  
 FAYETTEVILLE, NC  
 US 28306  
 Contact: WALTER CAPPS  
 WATER.CAPPS@NCAGR.GOV  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)