



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**PALASYN 45**  
Machine Id  
**SULLIVAN PALATEK 1608120003 - EVERLAST PORTABLE**  
Component  
**Compressor**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>UCS06232360</b>	UCS06051045	UCS05618357
Sample Date		Client Info		<b>03 Jul 2024</b>	26 Dec 2023	06 Jul 2022
Machine Age	hrs	Client Info		<b>1410</b>	973	4500
Oil Age	hrs	Client Info		<b>1000</b>	973	1105
Filter Age	hrs	Client Info		<b>1000</b>	500	1105
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	0.2%	0.2%

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	0
Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	966	<b>622</b>	536	604
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	1309	<b>1397</b>	782	1025
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.056</b>	0.07	0.16
Visc @ 40°C	cSt	ASTM D445	39.9	<b>42.5</b>	42.5	42.2

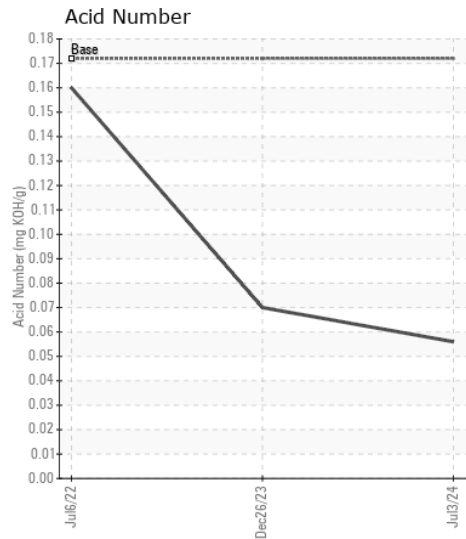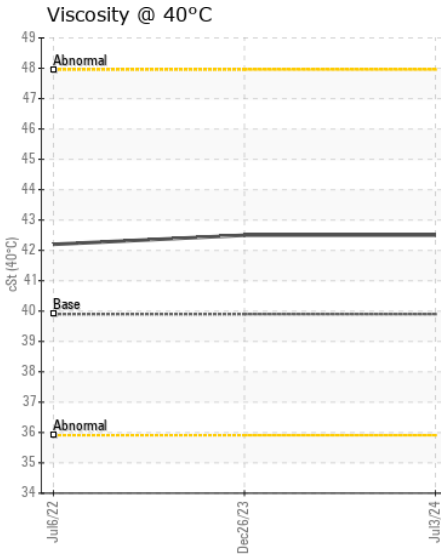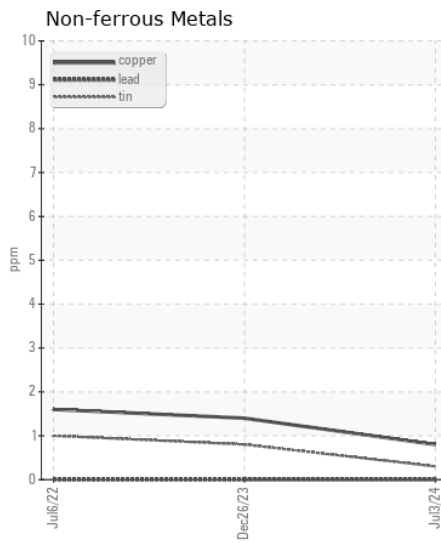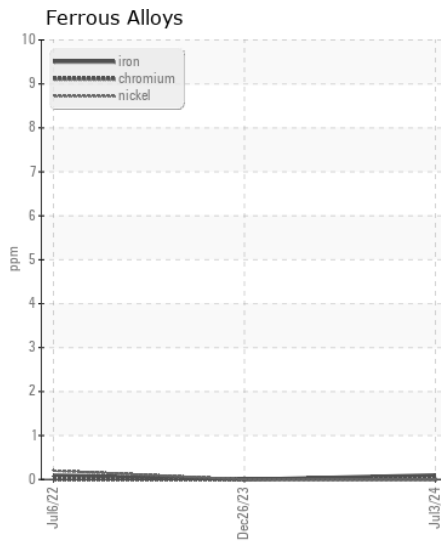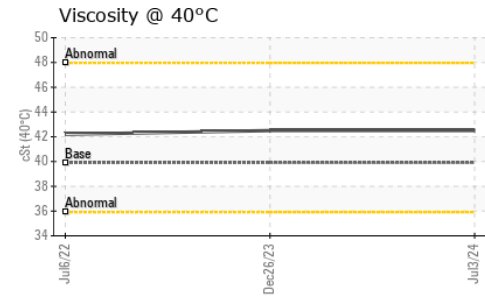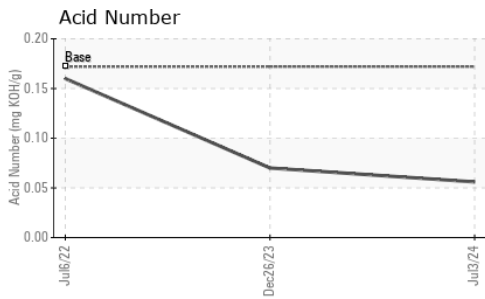

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06232360 **Received** : 10 Jul 2024  
**Lab Number** : 06232360 **Tested** : 11 Jul 2024  
**Unique Number** : 11115853 **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : IND 2

**CENTRAL POWER PRODUCTS**  
 100 N INDUSTRIAL PKWY  
 ARTHUR, IL  
 US 61911  
 Contact: JASON  
 centralpower22@gmail.com  
 T: (217)543-2022  
 F: (217)543-2224

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)