

Machine Id
M2 (S/N 1457407)
Component
Biogas Engine
Fluid
PETRO CANADA SENTRON LD 8000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0120740	PCA0120749	PCA0120756
Sample Date		Client Info		10 Jun 2024	20 May 2024	22 Apr 2024
Machine Age	hrs	Client Info		12676	12176	11676
Oil Age	hrs	Client Info		8530	8030	7530
Filter Age	hrs	Client Info		0	8030	0
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>45	12	12	10
Chromium	ppm	ASTM D5185m	>2	<1	1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	2	2
Lead	ppm	ASTM D5185m	>5	2	4	3
Copper	ppm	ASTM D5185m	>14	<1	<1	<1
Tin	ppm	ASTM D5185m	>13	3	4	5
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>200	<1	1	1
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Fuel	%	ASTM D3524	>4.0	0.1	0.2	0.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	22.2	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	4
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		9	10	14
Calcium	ppm	ASTM D5185m	1351	1849	1779	1755
Phosphorus	ppm	ASTM D5185m	302	321	322	335
Zinc	ppm	ASTM D5185m	358	412	421	444
Sulfur	ppm	ASTM D5185m	2758	3358	3439	3801
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	17.2	17.0
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	2.15	2.10	1.668
Base Number (BN)	mg KOH/g	ASTM D2896	4.64	2.81	3.27	3.33
Visc @ 100°C	cSt	ASTM D445	13.3	14.1	14.0	13.9

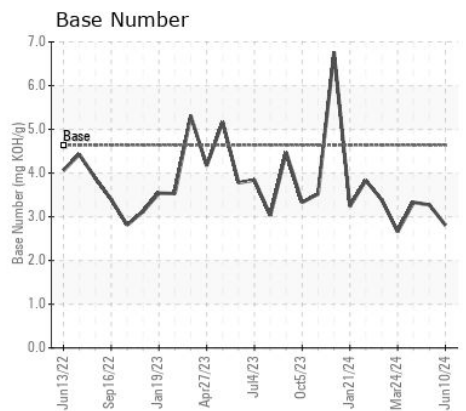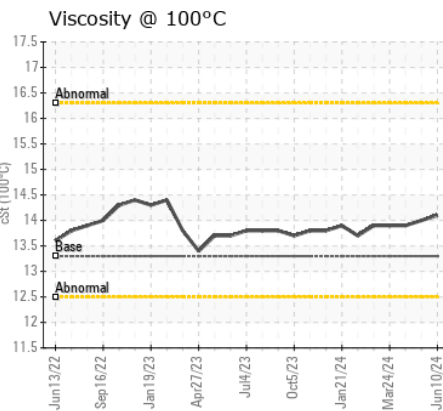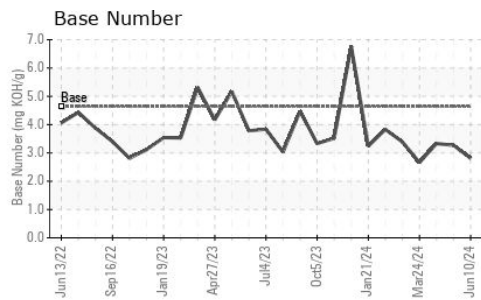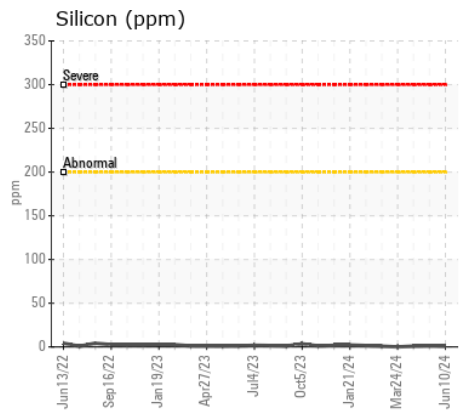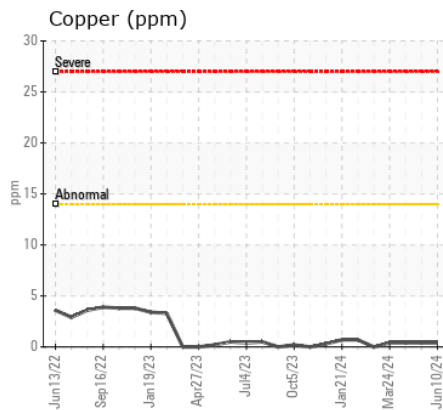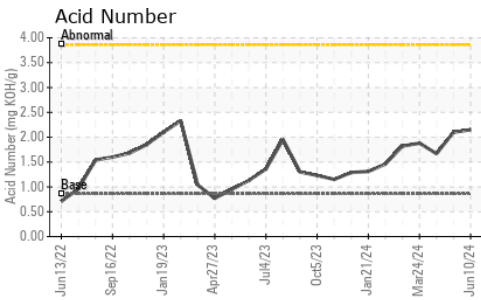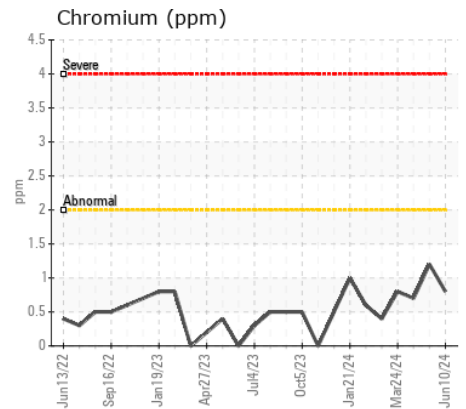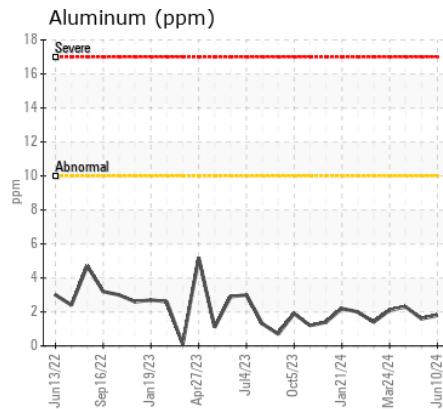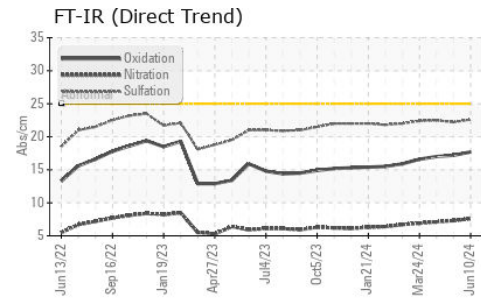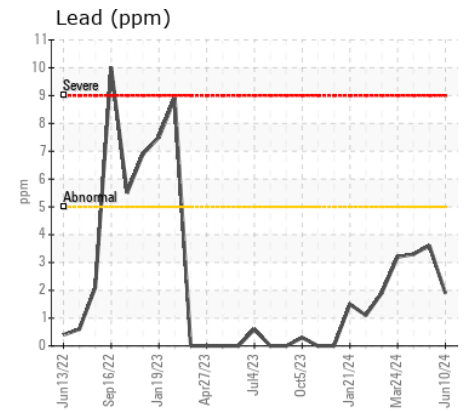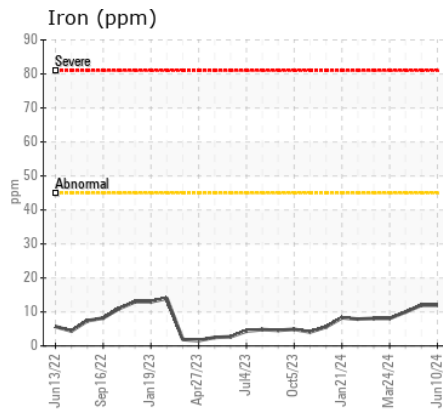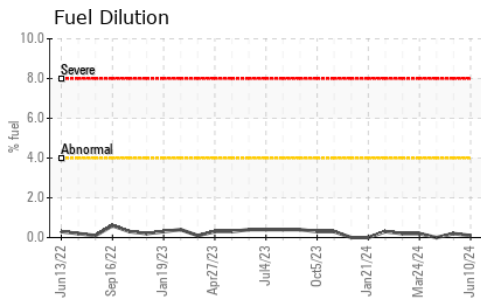

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120740
Lab Number : 06232394
Unique Number : 11115887
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

AMERICAN PETROLEUM
 CARR 865 KM 0.2 CAMPANILA
 TOA BAJA, PR
 US 00949
 Contact: NEFTALI ORTIZ
 nortiz@americanpetroleumpr.com
 T: (787)794-1985

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)