



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 410P 1DW410PACPF06345**

Component  
**Transmission (Auto)**

Fluid  
**JOHN DEERE HD SynTran (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0224894</b>	JR0165420	---
Sample Date		Client Info		<b>27 Jun 2024</b>	13 Jun 2023	---
Machine Age	hrs	Client Info		<b>1987</b>	502	---
Oil Age	hrs	Client Info		<b>1987</b>	0	---
Filter Age	hrs	Client Info		<b>1987</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>39</b>	33	---
Iron	ppm	ASTM D5185m	>160	<b>104</b>	37	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	1	---
Copper	ppm	ASTM D5185m	>225	<b>2</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185m	>20	<b>6</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	3	---
Boron	ppm	ASTM D5185m	168	<b>101</b>	129	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>4</b>	5	---
Calcium	ppm	ASTM D5185m	33	<b>134</b>	146	---
Phosphorus	ppm	ASTM D5185m	330	<b>259</b>	269	---
Zinc	ppm	ASTM D5185m	0	<b>21</b>	23	---
Sulfur	ppm	ASTM D5185m	980	<b>544</b>	578	---
Visc @ 40°C	cSt	ASTM D445	39	<b>40.0</b>	36.4	---


Viscosity @ 40°C

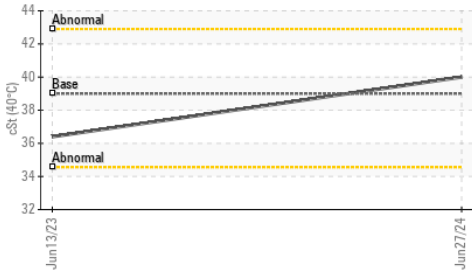


PQ

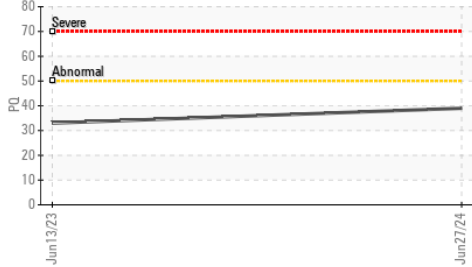


Ferrous Alloys

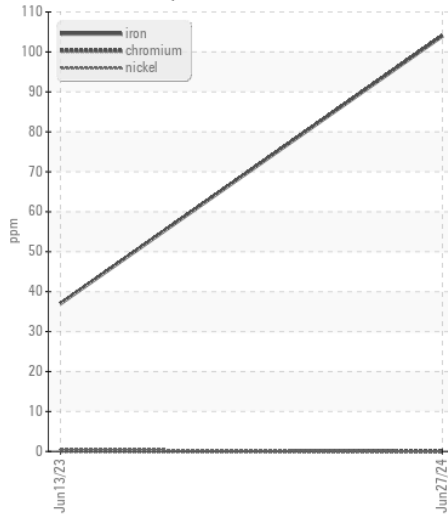


Non-ferrous Metals

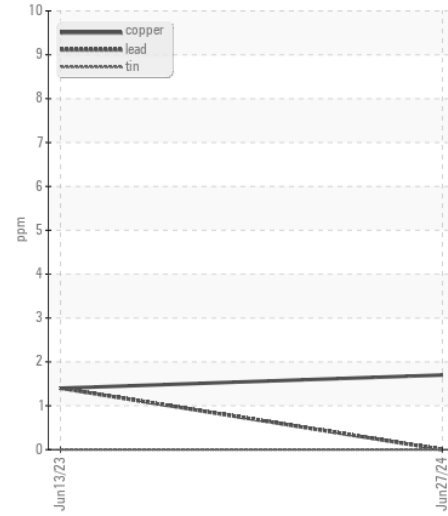

PQ

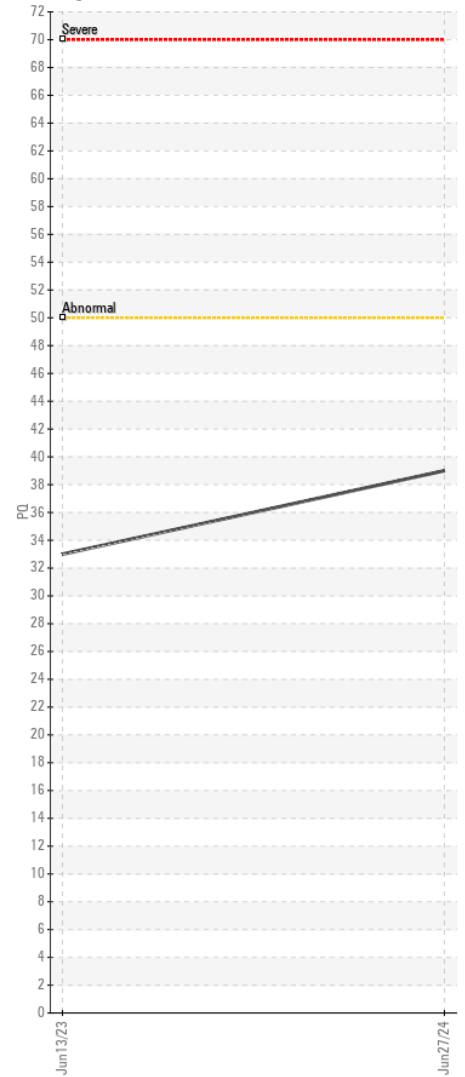

Viscosity @ 40°C

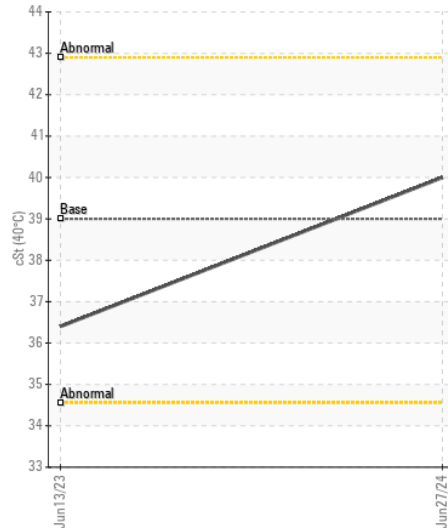

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0224894 **Received** : 10 Jul 2024  
**Lab Number** : 06232423 **Tested** : 11 Jul 2024  
**Unique Number** : 11115916 **Diagnosed** : 11 Jul 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)