



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W67875]**  
 Machine Id  
**JOHN DEERE 210G 1FF210GXPNF530722**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 80W90 (2 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W67875 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0219437</b>	---	---
Sample Date		Client Info		<b>08 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>475</b>	---	---
Oil Age	hrs	Client Info		<b>475</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>42</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>66</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m		<b>0</b>	---	---
Copper	ppm	ASTM D5185m		<b>0</b>	---	---
Tin	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>16</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>8</b>	---	---
Boron	ppm	ASTM D5185m		<b>33</b>	---	---
Barium	ppm	ASTM D5185m		<b>5</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	---	---
Calcium	ppm	ASTM D5185m		<b>20</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>495</b>	---	---
Zinc	ppm	ASTM D5185m		<b>12</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>15353</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>163</b>	---	---

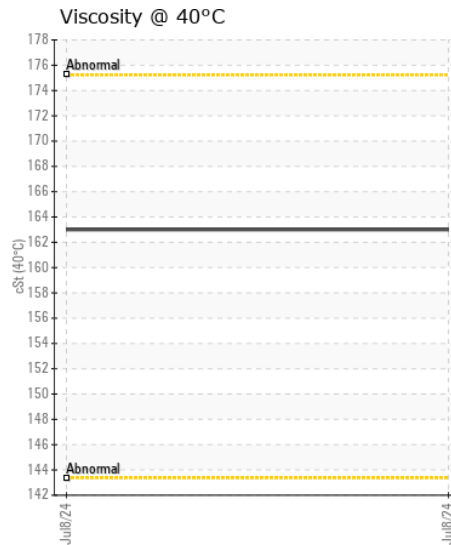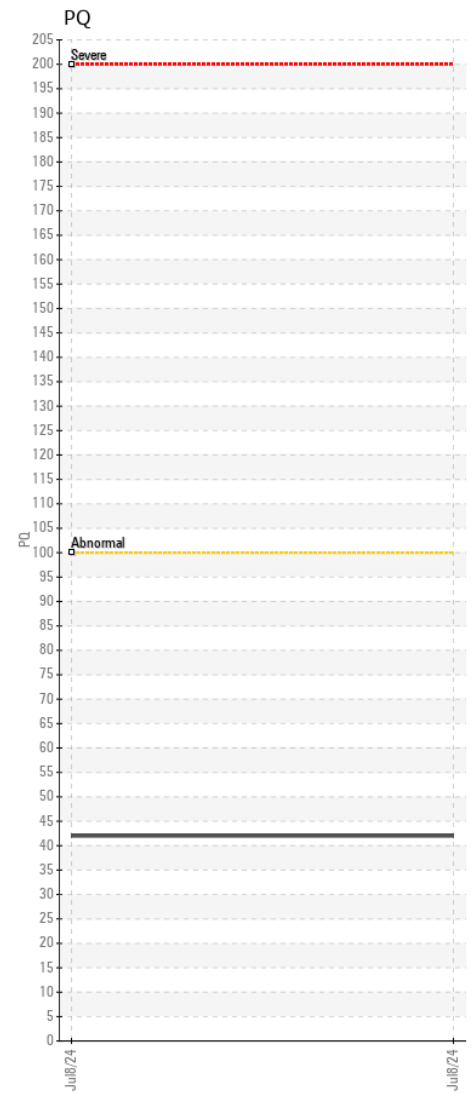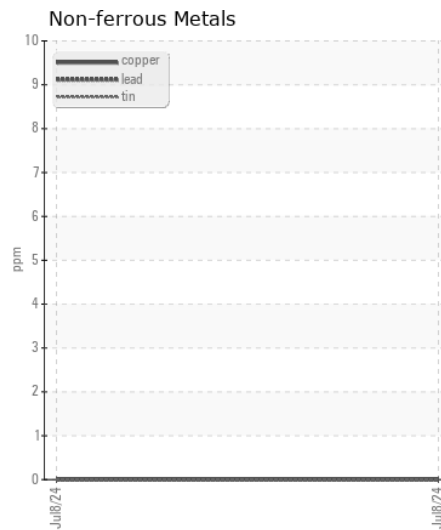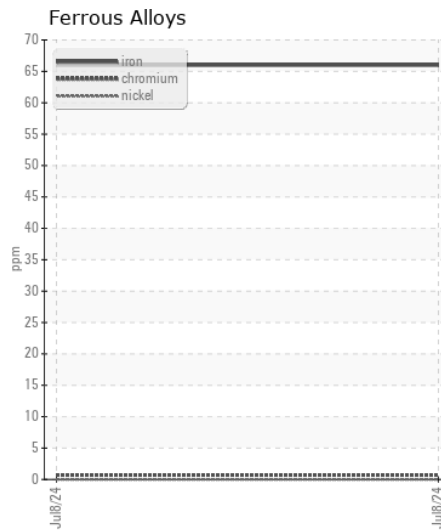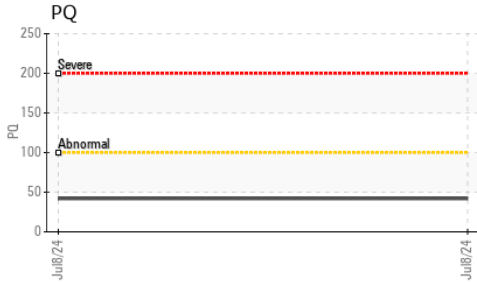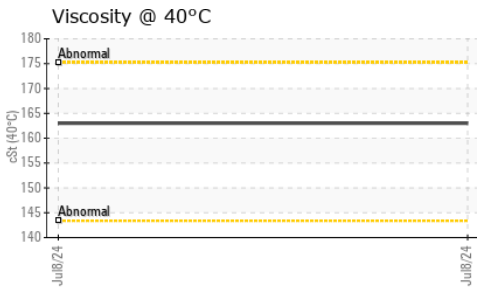

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0219437

**Lab Number** : 06232450

**Unique Number** : 11115943

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 10 Jul 2024

**Tested** : 11 Jul 2024

**Diagnosed** : 11 Jul 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: JUSTIN WILLIAMS

justin.williams@jamesriverequipment.com

T: (336)668-2762

F: (336)665-9556