



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W67875]
 Machine Id
JOHN DEERE 210G 1FF210GXPNF530722
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W67875)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0219436	---	---
Sample Date		Client Info		08 Jul 2024	---	---
Machine Age	hrs	Client Info		475	---	---
Oil Age	hrs	Client Info		475	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	159	---	---
Iron	ppm	ASTM D5185m	>750	216	---	---
Chromium	ppm	ASTM D5185m	>9	4	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	25	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	---	---
Boron	ppm	ASTM D5185m		72	---	---
Barium	ppm	ASTM D5185m		6	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		10	---	---
Phosphorus	ppm	ASTM D5185m		496	---	---
Zinc	ppm	ASTM D5185m		23	---	---
Sulfur	ppm	ASTM D5185m		16131	---	---
Visc @ 40°C	cSt	ASTM D445		184	---	---

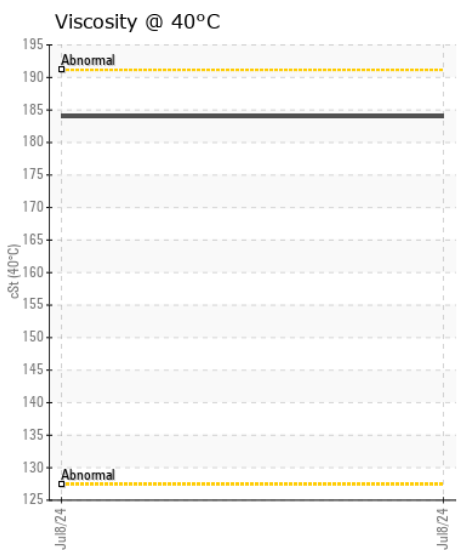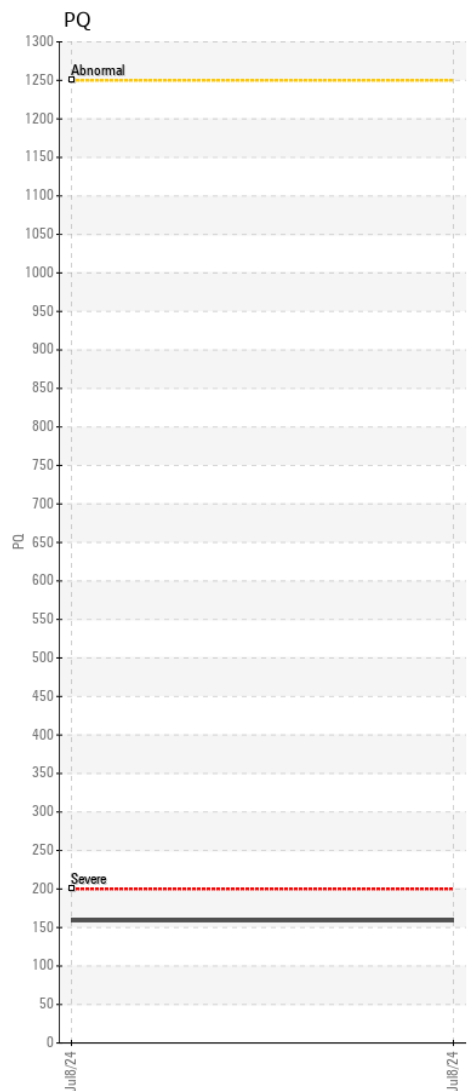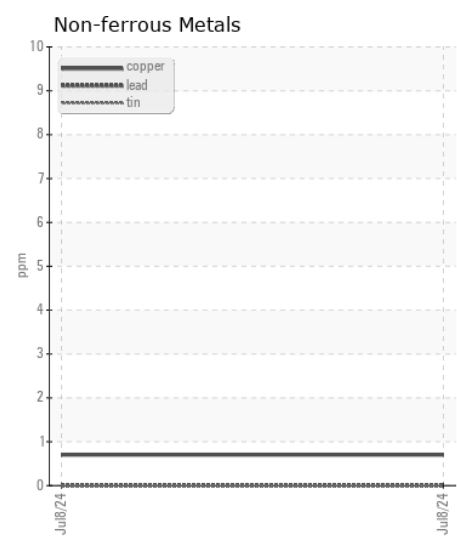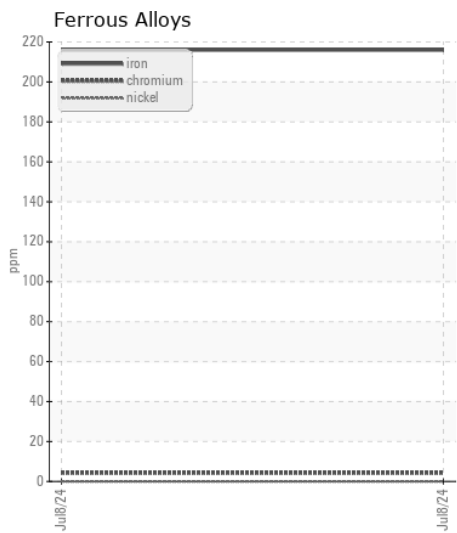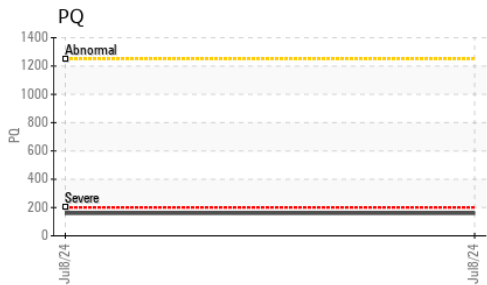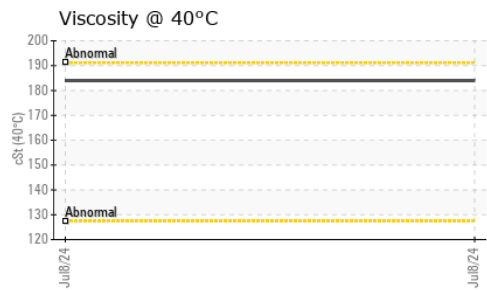

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0219436 **Received** : 10 Jul 2024
Lab Number : 06232452 **Tested** : 11 Jul 2024
Unique Number : 11115945 **Diagnosed** : 11 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: JUSTIN WILLIAMS
 justin.williams@jamesriverequipment.com
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)