



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
[W68231]

Machine Id
HITACHI 350LC 1FFDDR70CJF940555

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W68231)

WEAR

All component wear rates are normal.

CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.

FLUID CONDITION







The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220286	JR0178267	JR0150968
Sample Date		Client Info		09 Jul 2024	30 Aug 2023	20 Dec 2022
Machine Age	hrs	Client Info		8598	7644	6779
Oil Age	hrs	Client Info		7198	7109	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

PQ		ASTM D8184		58	14	57
Iron	ppm	ASTM D5185m	>500	230	0	105
Chromium	ppm	ASTM D5185m	>10	3	0	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	<1	1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	17	<1	7
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		2	<1	0
Boron	ppm	ASTM D5185m		100	6	169
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		3	<1	2
Magnesium	ppm	ASTM D5185m		2	4	<1
Calcium	ppm	ASTM D5185m		17	7	5
Phosphorus	ppm	ASTM D5185m		727	423	899
Zinc	ppm	ASTM D5185m		14	3	7
Sulfur	ppm	ASTM D5185m		19601	22757	19935
Visc @ 40°C	cSt	ASTM D445		147	141	148

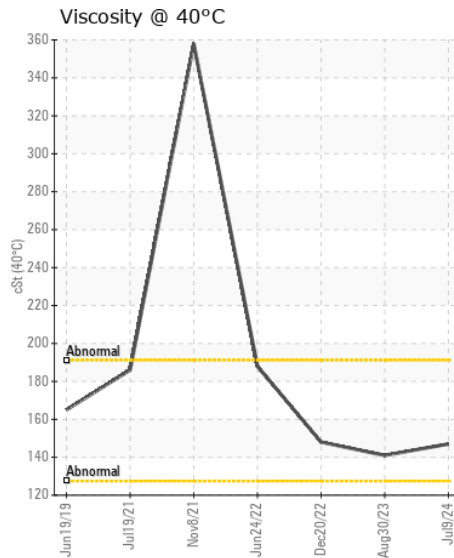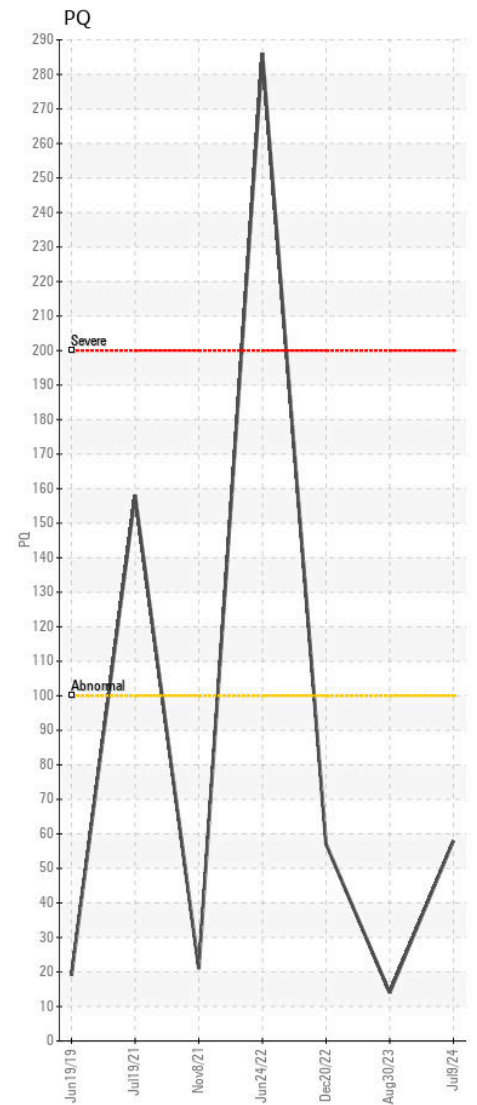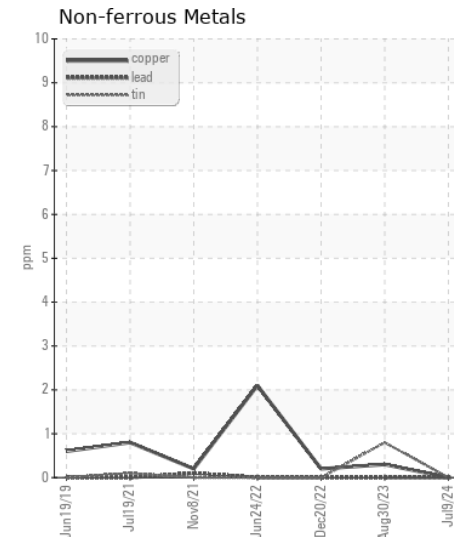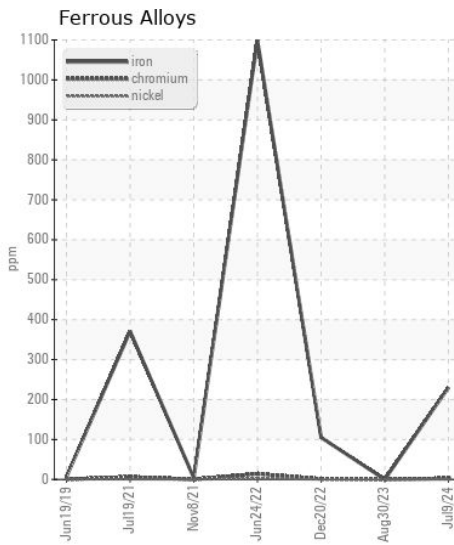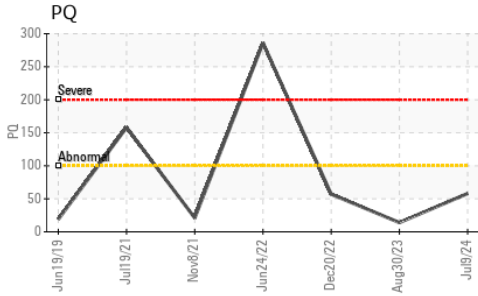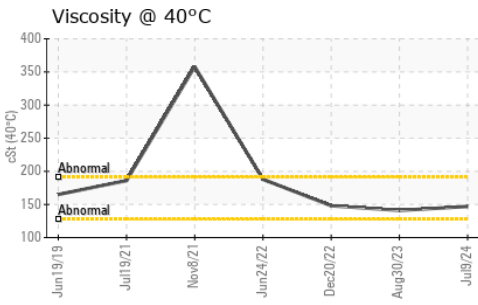

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220286 **Received** : 10 Jul 2024
Lab Number : 06232481 **Tested** : 11 Jul 2024
Unique Number : 11115974 **Diagnosed** : 12 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)