



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 750L 6X15 (S/N 1T0750LXLNF429335)
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0197259 | --- | --- |
| Sample Date | | Client Info | | 08 Jul 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 118 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Not Chngd | --- | --- |
| Filter Changed | | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|-----|-----|
| PQ | | ASTM D8184 | >1250 | 30 | --- | --- |
| Iron | ppm | ASTM D5185m | >750 | 28 | --- | --- |
| Chromium | ppm | ASTM D5185m | >9 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >40 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m | >15 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >40 | 0 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | 9 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Water | | WC Method | >0.075 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >51 | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | 6 | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | 4 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 145 | 93 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3570 | 3398 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1290 | 1026 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1640 | 1187 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3908 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 57.0 | --- | --- |

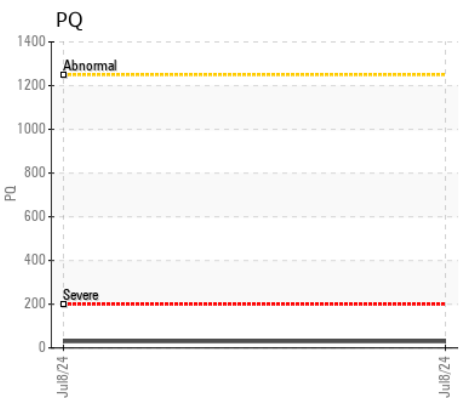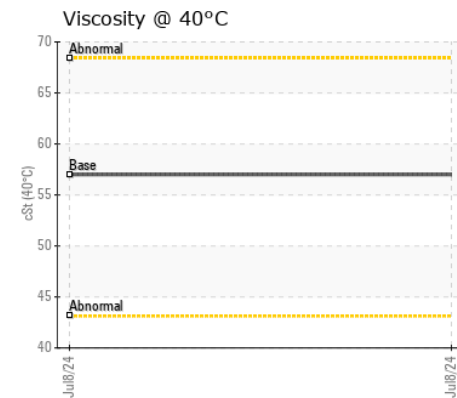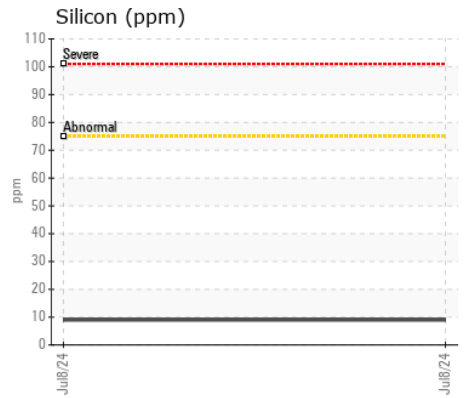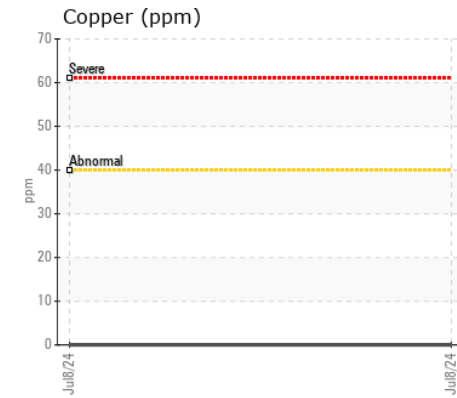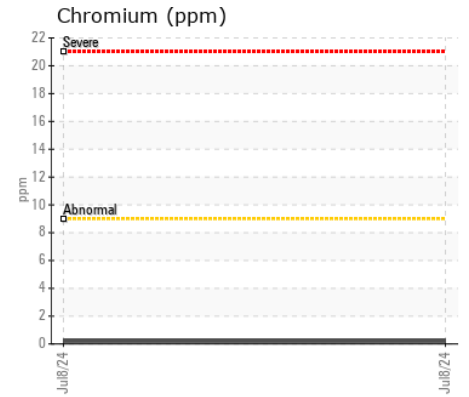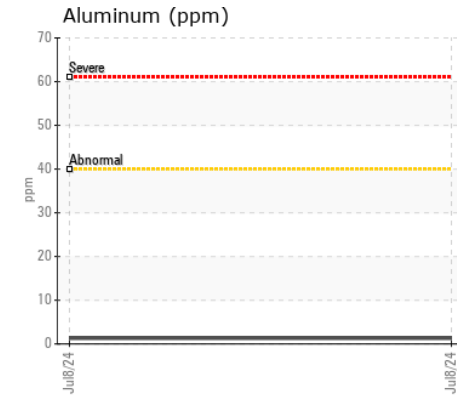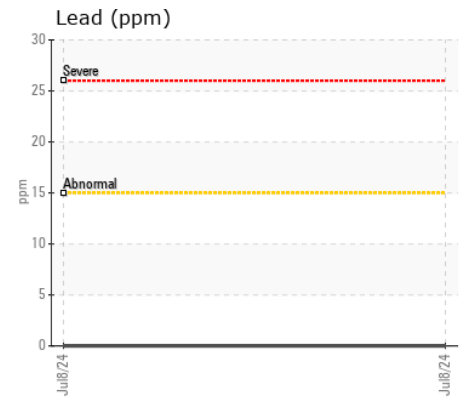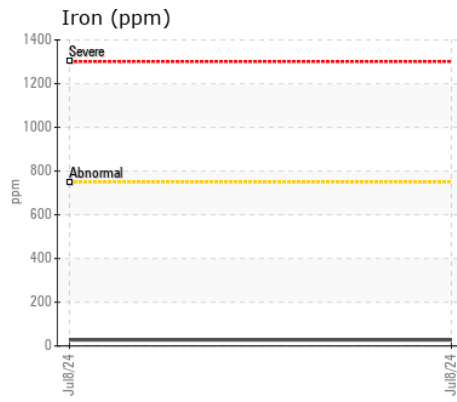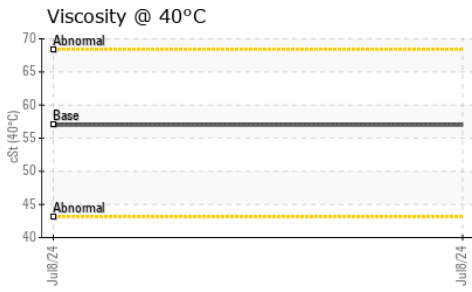

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0197259

Lab Number : 06232521

Unique Number : 11116014

Test Package : MOBCE (Additional Tests: PQ)

Received : 10 Jul 2024

Tested : 11 Jul 2024

Diagnosed : 11 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NC FOREST SERVICE

221 AIRPORT RD

FAYETTEVILLE, NC

US 28306

Contact: WALTER CAPPS

WATER.CAPPS@NCAGR.GOV

T:

F: