



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W68476]
 Machine Id
HITACHI 1FFDC571HLF340857
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W68476)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0219657	JR0188372	---
Sample Date		Client Info		09 Jul 2024	07 Sep 2023	---
Machine Age	hrs	Client Info		3908	3003	---
Oil Age	hrs	Client Info		3908	3003	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		563	525	---
Iron	ppm	ASTM D5185m	>500	1092	1039	---
Chromium	ppm	ASTM D5185m	>10	15	14	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	5	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	2	2	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	34	27	---
Potassium	ppm	ASTM D5185m	>20	5	5	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m		37	46	---
Barium	ppm	ASTM D5185m		8	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		15	15	---
Magnesium	ppm	ASTM D5185m		2	0	---
Calcium	ppm	ASTM D5185m		11	33	---
Phosphorus	ppm	ASTM D5185m		489	515	---
Zinc	ppm	ASTM D5185m		40	32	---
Sulfur	ppm	ASTM D5185m		16610	17688	---
Visc @ 40°C	cSt	ASTM D445		188	186	---

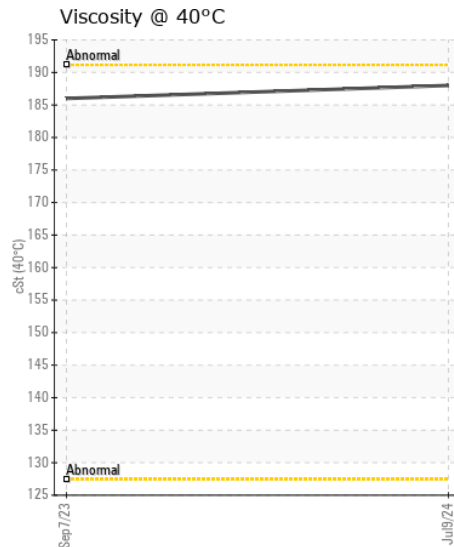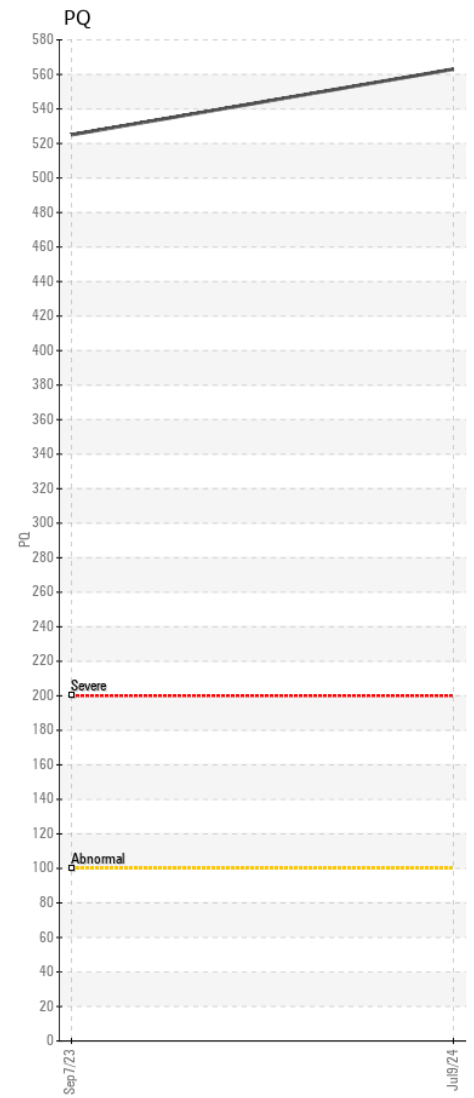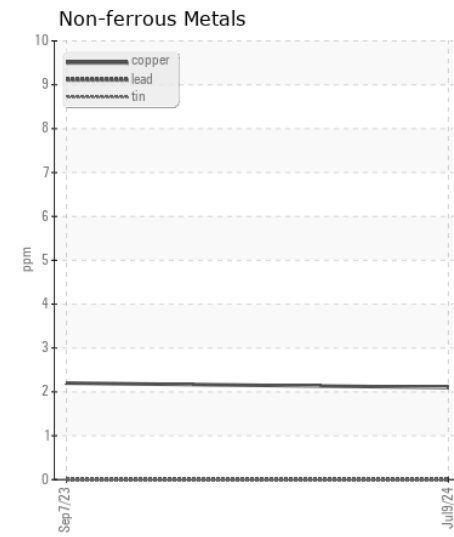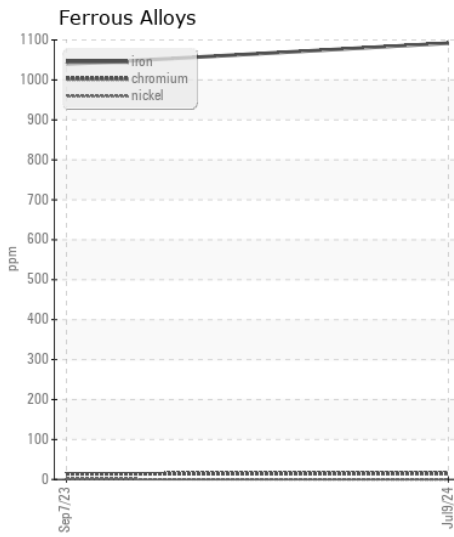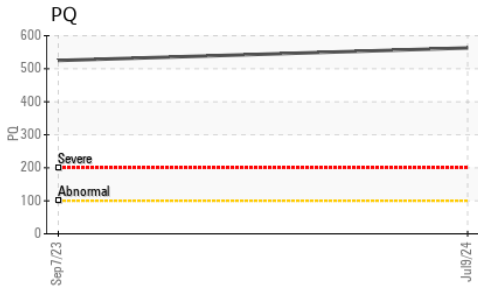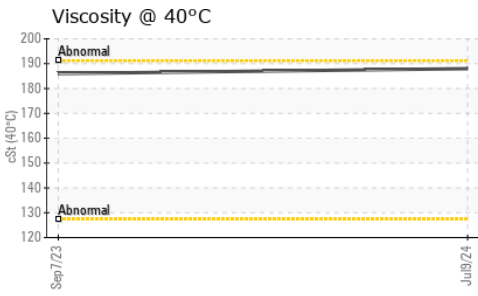

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0219657 **Received** : 10 Jul 2024
Lab Number : 06232530 **Tested** : 11 Jul 2024
Unique Number : 11116023 **Diagnosed** : 12 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198