



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W47914]

Machine Id

JOHN DEERE 350G 1FF350GXVMF815076

Component

Pump Drive

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (1 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218557	JR0211139	JR0173039
Sample Date		Client Info		09 Jul 2024	01 Apr 2024	11 May 2023
Machine Age	hrs	Client Info		3988	3456	2967
Oil Age	hrs	Client Info		1000	500	2469
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		23	20	18
Iron	ppm	ASTM D5185m	>151	102	49	58
Chromium	ppm	ASTM D5185m	>11	1	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	6	4	1
Lead	ppm	ASTM D5185m	>51	0	<1	0
Copper	ppm	ASTM D5185m	>51	0	0	0
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	26	13	14
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	4	3	2
Boron	ppm	ASTM D5185m		263	316	298
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		238	234	242
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m		714	762	798
Calcium	ppm	ASTM D5185m		1454	1459	1427
Phosphorus	ppm	ASTM D5185m		943	870	925
Zinc	ppm	ASTM D5185m		964	1037	1073
Sulfur	ppm	ASTM D5185m		3702	4079	4130
Visc @ 40°C	cSt	ASTM D445	117	67.4	71.3	69.0

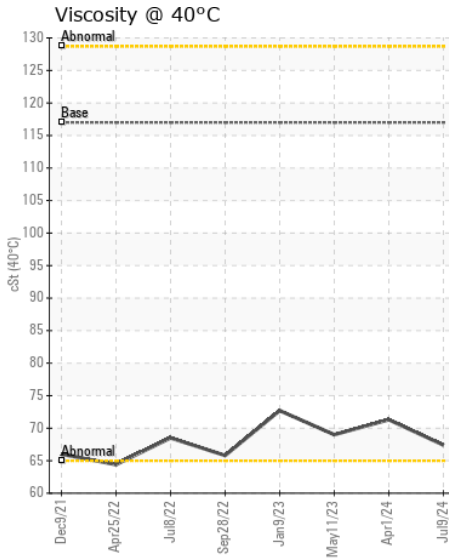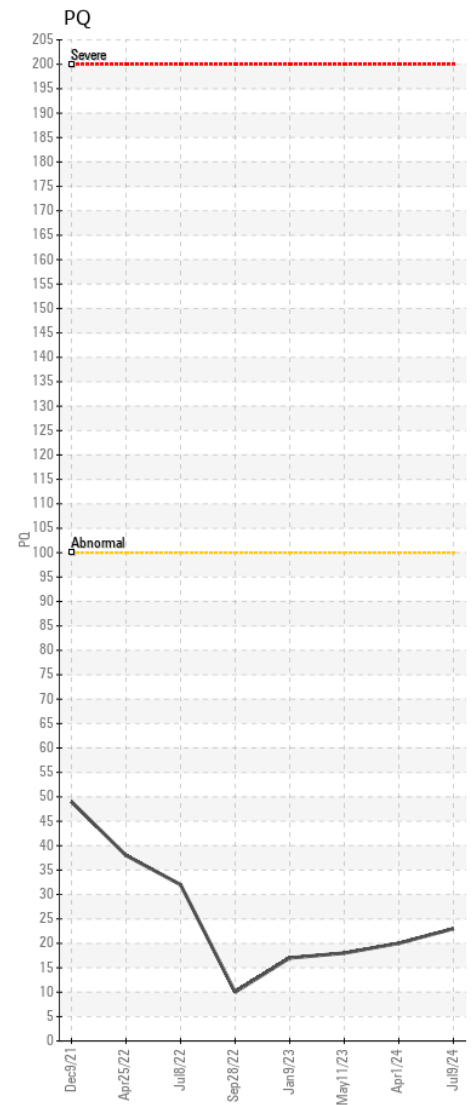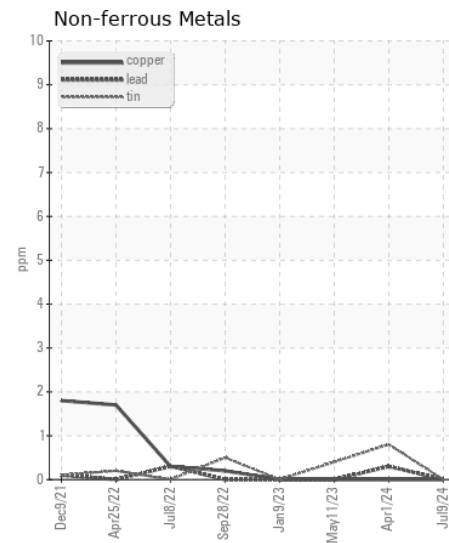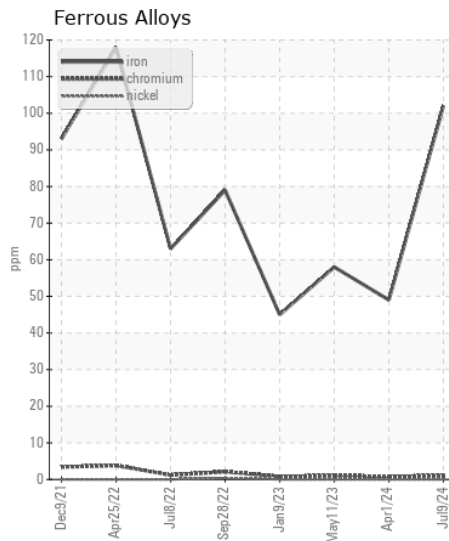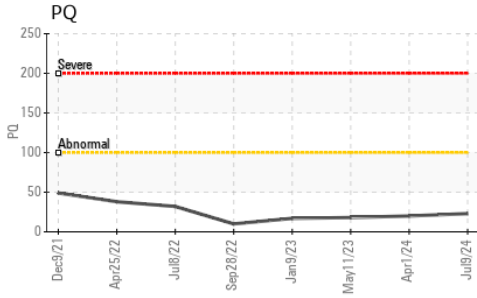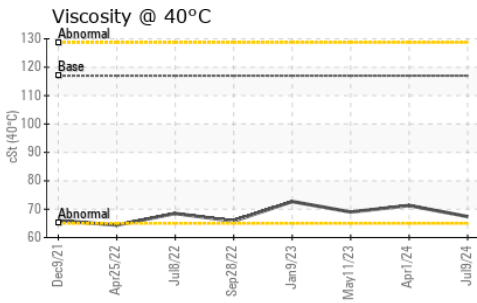

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218557 **Received** : 10 Jul 2024
Lab Number : 06232537 **Tested** : 11 Jul 2024
Unique Number : 11116030 **Diagnosed** : 11 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136

Contact: DANNY HUFF
 dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605