

RICK MORRIS [JF] VOLVO PENTA 3940017776

Starboard IPS

GEAR OIL SAE 75W90 (14 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.


FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA052585		
Sample Date		Client Info		09 Jul 2024		
Machine Age	hrs	Client Info		309		
Oil Age	hrs	Client Info		0		
Filter Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Filter Changed		Client Info		Not Changd		
Sample Status				NORMAL		
PQ		ASTM D8184		19		
Iron	ppm	ASTM D5185m	>275	38		
Chromium	ppm	ASTM D5185m	>4	0		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>4	0		
Copper	ppm	ASTM D5185m	>30	3		
Tin	ppm	ASTM D5185m	>3	0		
Vanadium	ppm	ASTM D5185m		0		
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Silicon		ASTM D5185m	. 05	0		
Potassium	ppm	ASTM D5185m	>35 >20	8 0		
Water	ppm	WC Method	>0.2	NEG		
Silt	scalar	*Visual	>0.2	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Sodium	ppm	ASTM D5185m		2		
Boron	ppm	ASTM D5185m	400	282		
Barium	ppm	ASTM D5185m	200	0		
Molybdenum	ppm	ASTM D5185m	12	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	12	6		
Calcium	ppm	ASTM D5185m	150	6		
Phosphorus	ppm	ASTM D5185m	1650	1357		
Zinc	ppm	ASTM D5185m	125	10		
Sulfur	ppm	ASTM D5185m	22500	26787		
Visc @ 40°C	cSt	ASTM D445	109	106		

Contact/Location: JAMIE FLAHERTY - VP1130693



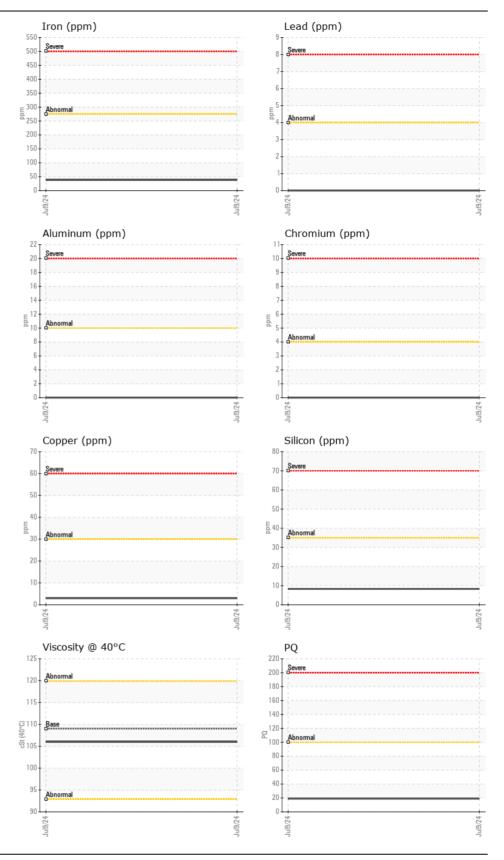



Contact/Location: JAMIE FLAHERTY - VP1130693 Page 2 of 2