



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[ACG]

Machine Id

VOLVO A30G 752040

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009492	ASC0008767	ASC0002513
Sample Date		Client Info		01 Jul 2024	19 Mar 2024	21 Nov 2023
Machine Age	hrs	Client Info		5006	4480	4022
Oil Age	hrs	Client Info		1000	500	2626
Filter Age	hrs	Client Info		1000	500	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	15	12	19
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	2	3
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	10	7	19
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>225	17	11	21
Tin	ppm	ASTM D5185m	>10	2	3	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	3	4	5
Potassium	ppm	ASTM D5185m	>20	<1	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	2	2
Boron	ppm	ASTM D5185m	187	86	109	88
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	2	3	<1
Manganese	ppm	ASTM D5185m	0.0	<1	<1	1
Magnesium	ppm	ASTM D5185m	6.8	24	30	2
Calcium	ppm	ASTM D5185m	215	196	237	93
Phosphorus	ppm	ASTM D5185m	445	340	310	223
Zinc	ppm	ASTM D5185m	56	42	48	0
Sulfur	ppm	ASTM D5185m	1336	1835	1655	1755
Visc @ 40°C	cSt	ASTM D445	35.3	31.9	29.1	29.1

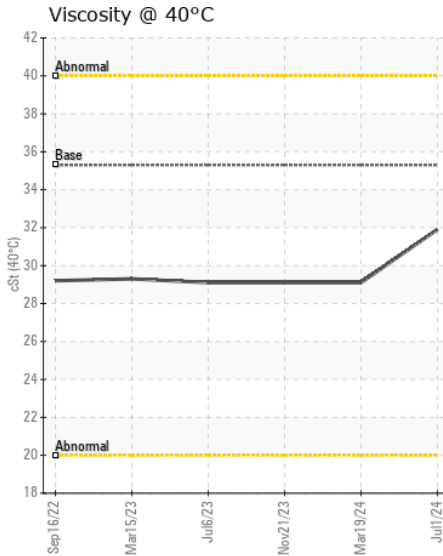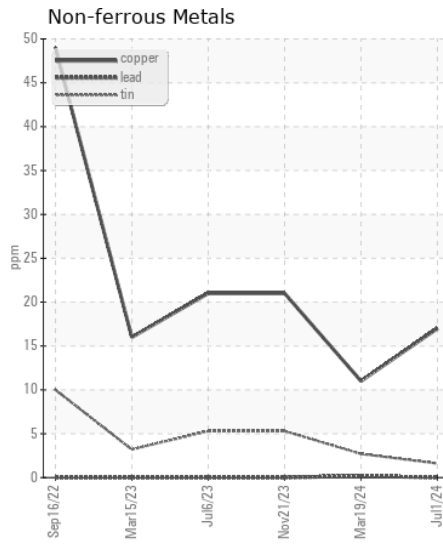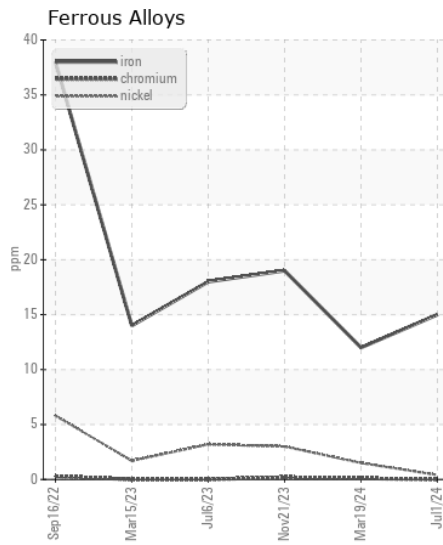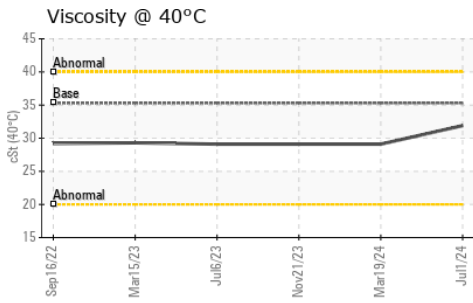

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009492
Lab Number : 06232646
Unique Number : 11116139
Test Package : CONST

Received : 10 Jul 2024
Tested : 11 Jul 2024
Diagnosed : 11 Jul 2024 - Wes Davis

113 - ASCENDUM MACHINERY INC - GARNER
 3561 JONES SAUSAGE ROAD
 GARNER, NC
 US 27529

Contact: TRENT BROADWELL
 trent.broadwell@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)661-8817
 F: (919)661-9038