



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
TANK - AW 46
 Component
Hydraulic System
 Fluid
ISO 46 (--- QTS)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0032382	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

Iron	ppm	ASTM D5185m	>20	<1	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>20	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>20	<1	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---











CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>15	<1	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	6188	---	---
Particles >6µm		ASTM D7647	>1300	2127	---	---
Particles >14µm		ASTM D7647	>160	99	---	---
Particles >21µm		ASTM D7647	>40	16	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		7	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		102	---	---
Calcium	ppm	ASTM D5185m		278	---	---
Phosphorus	ppm	ASTM D5185m		339	---	---
Zinc	ppm	ASTM D5185m		441	---	---
Sulfur	ppm	ASTM D5185m		5102	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.49	---	---
Visc @ 40°C	cSt	ASTM D445	46.0	45.64	---	---
Visc @ 100°C	cSt	ASTM D445	6.5	7.13	---	---
Viscosity Index (VI)	Scale	ASTM D2270	88	115	---	---

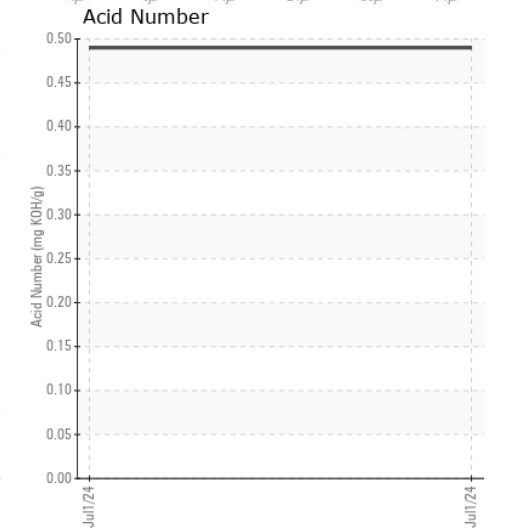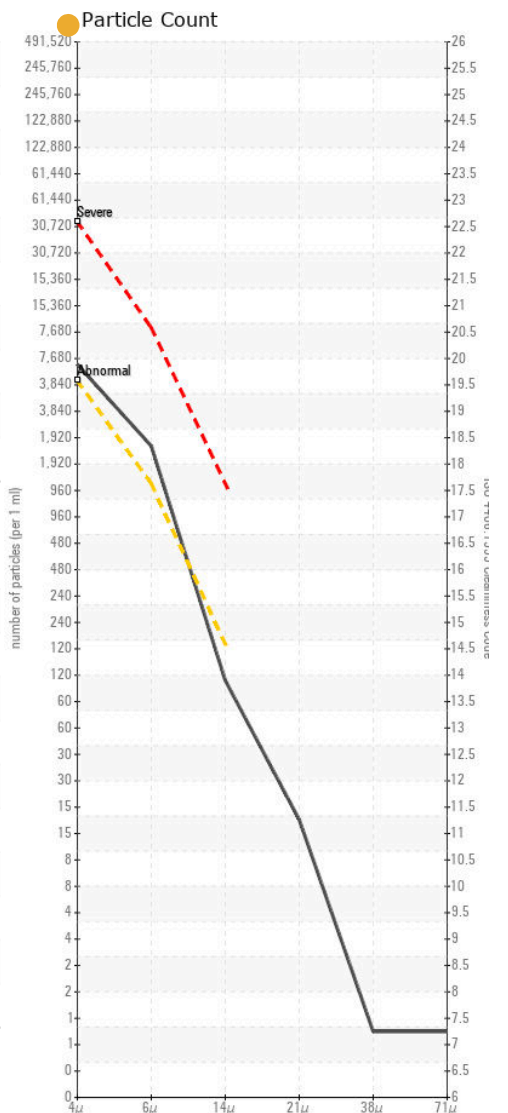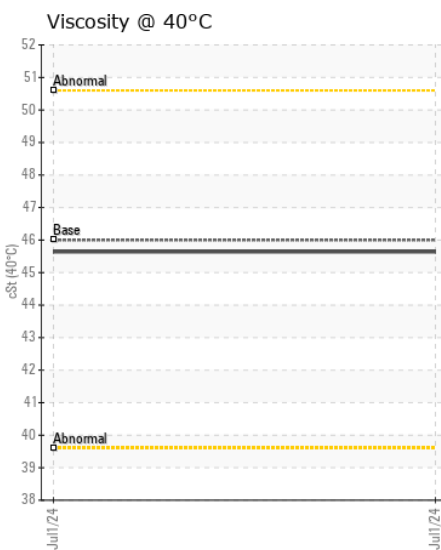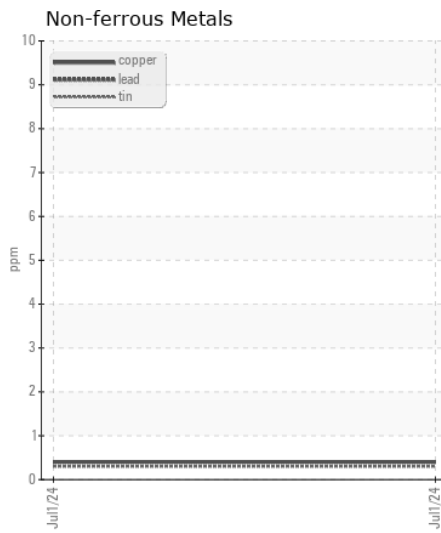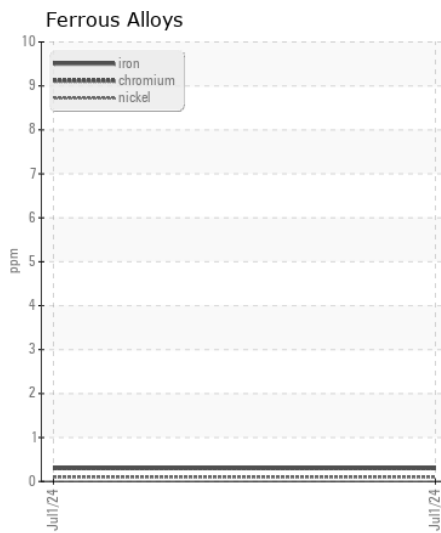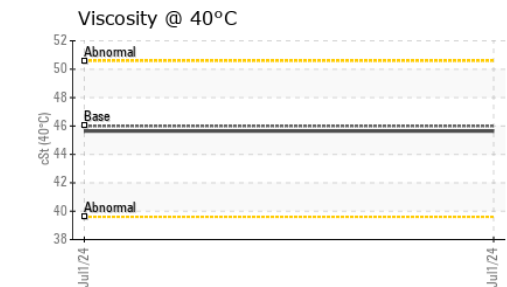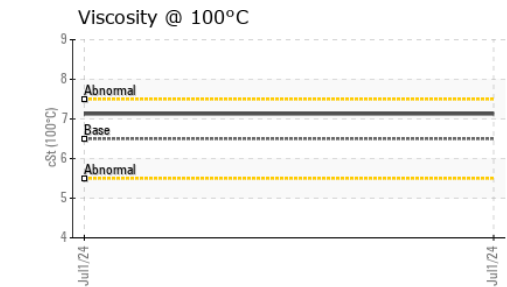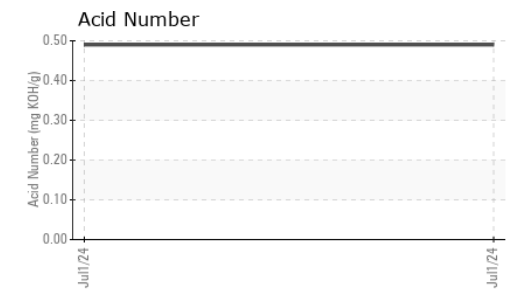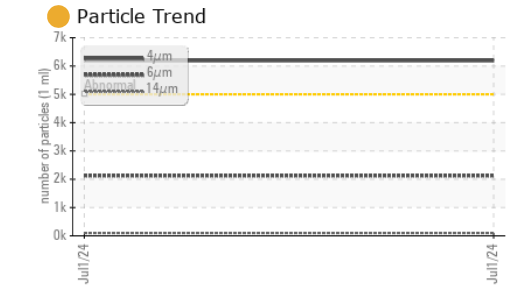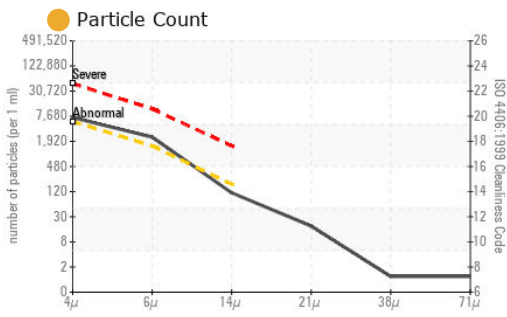

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0032382 **Received** : 10 Jul 2024
Lab Number : 06232666 **Tested** : 11 Jul 2024
Unique Number : 11116159 **Diagnosed** : 15 Jul 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KV100, VI)

TIR STATE STONE AND BUILDING
 8200 SEVEN LOCKS RD
 BETHESDA, MD
 US 20814
 Contact: GREG V
 GREGV@CARDEROCK.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)