



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PAULSBORO 2301
 Component
New (Unused) Oil
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033599	DC0033602	DC0033912
Sample Date		Client Info		19 Jun 2024	14 Jun 2024	31 May 2024
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	---	NORMAL

WEAR










Iron	ppm	ASTM D5185m		0	0	0
Chromium	ppm	ASTM D5185m		<1	<1	0
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		3	3	0
Lead	ppm	ASTM D5185m		<1	<1	0
Copper	ppm	ASTM D5185m		<1	<1	0
Tin	ppm	ASTM D5185m		<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Silicon	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	1	<1
Water		WC Method		NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	97	111	102
Particles >6µm		ASTM D7647	>1300	33	35	27
Particles >14µm		ASTM D7647	>160	2	4	2
Particles >21µm		ASTM D7647	>40	0	1	0
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/12/9	14/12/9	14/12/9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	<1	2
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		<1	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		4801	5206	6207
Acid Number (AN)	mg KOH/g	ASTM D8045		0.076	undef	0.074
Visc @ 40°C	cSt	ASTM D445		43.65	43.42	43.31
Visc @ 100°C	cSt	ASTM D445		6.78	6.82	6.78
Viscosity Index (VI)	Scale	ASTM D2270		109	112	111

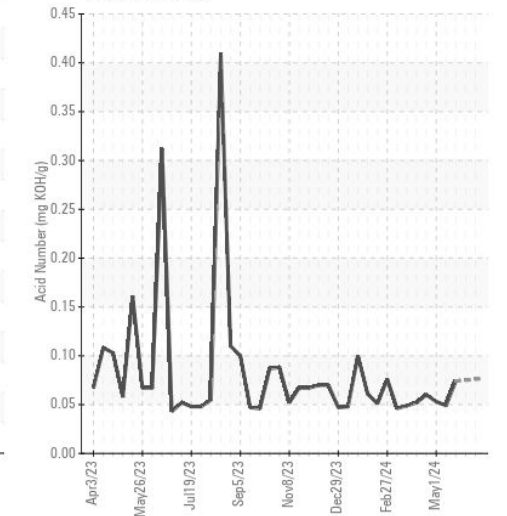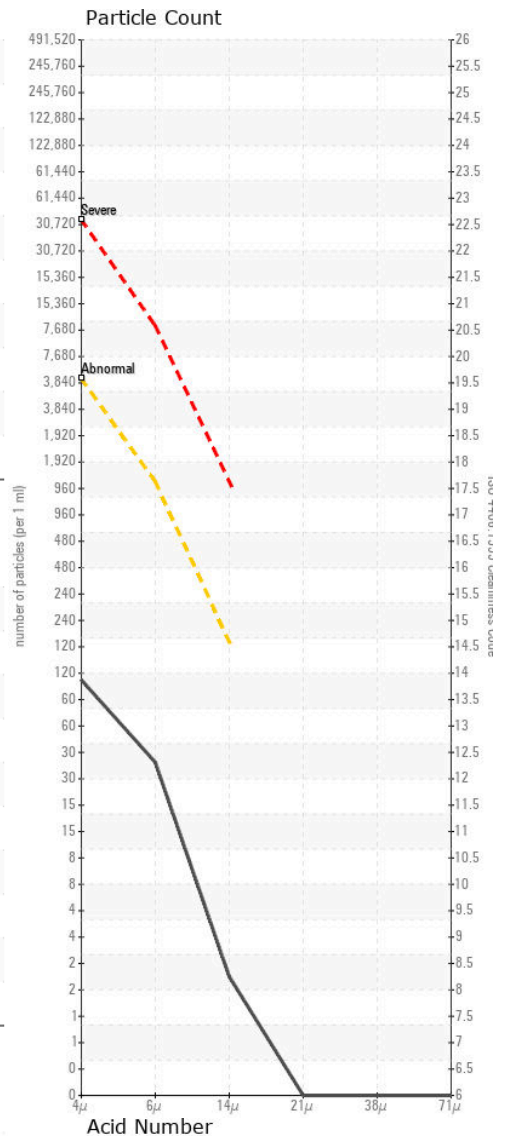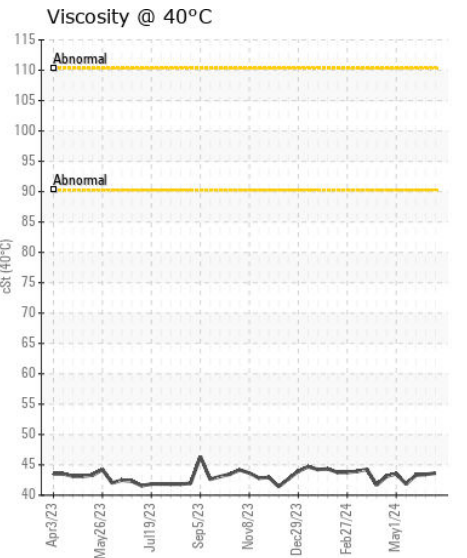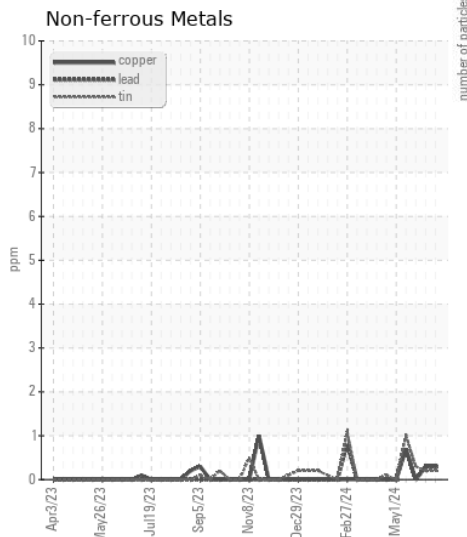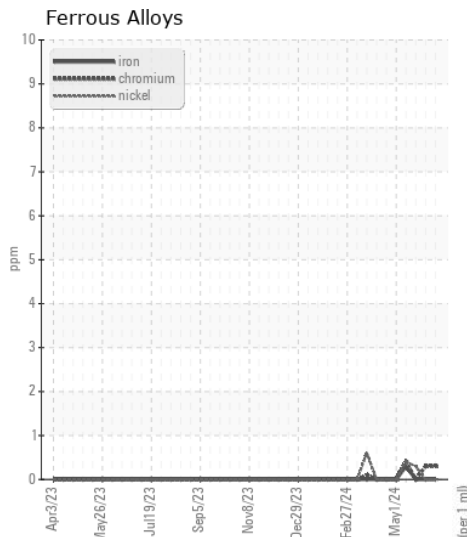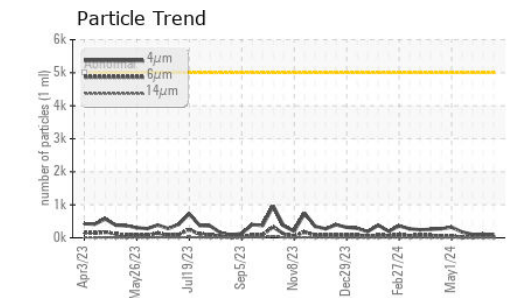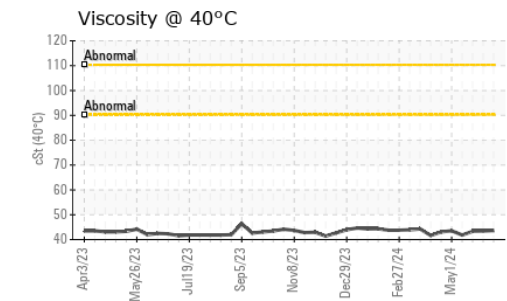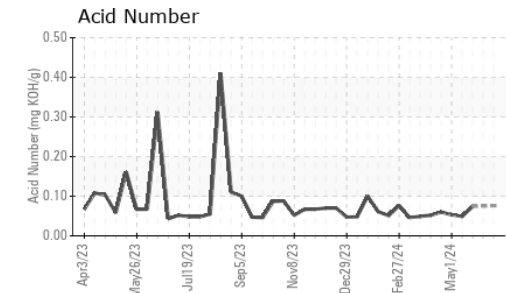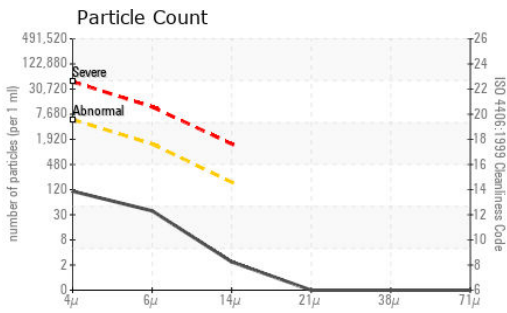

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033599 **Received** : 10 Jul 2024
Lab Number : 06232669 **Tested** : 12 Jul 2024
Unique Number : 11116162 **Diagnosed** : 12 Jul 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: FT-IR, KV100, PrtCount, VI)

THE UNITED OIL COMPANY - OPERATIONS
 4405 E. BALTIMORE ST
 BALTIMORE, MD
 US 21224
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (410)327-7695