



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**ALS HVI 46**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- LTR)**

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0033724</b>	DC0033597	DC0033911
Sample Date		Client Info		<b>09 Jul 2024</b>	20 Jun 2024	23 May 2024
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	---	NORMAL

## WEAR










Iron	ppm	ASTM D5185m		<b>0</b>	0	0
Chromium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m		<b>3</b>	3	0
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

Silicon	ppm	ASTM D5185m		<b>0</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Water		WC Method		<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>729</b>	3106	2142
Particles >6µm		ASTM D7647	>1300	<b>170</b>	356	189
Particles >14µm		ASTM D7647	>160	<b>8</b>	9	3
Particles >21µm		ASTM D7647	>40	<b>1</b>	0	1
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/10</b>	19/16/10	18/15/9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

## FLUID CONDITION

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>4</b>	2	1
Calcium	ppm	ASTM D5185m		<b>90</b>	72	99
Phosphorus	ppm	ASTM D5185m		<b>343</b>	409	314
Zinc	ppm	ASTM D5185m		<b>467</b>	557	423
Sulfur	ppm	ASTM D5185m		<b>1142</b>	1497	1654
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.33</b>	0.40	0.65
Visc @ 40°C	cSt	ASTM D445		<b>47.89</b>	▲ 51.57	46.47
Visc @ 100°C	cSt	ASTM D445		<b>8.54</b>	8.73	7.96
Viscosity Index (VI)	Scale	ASTM D2270		<b>156</b>	147	142

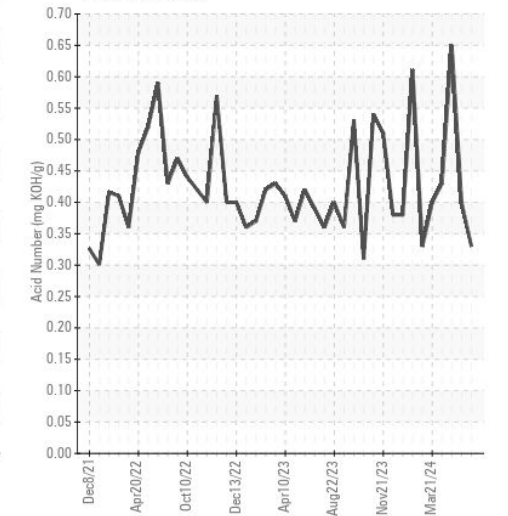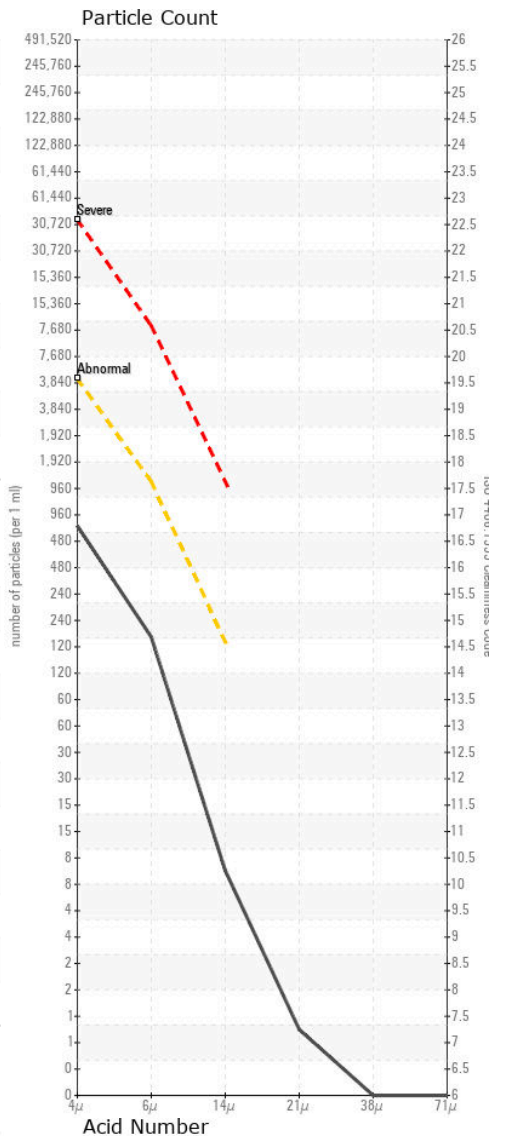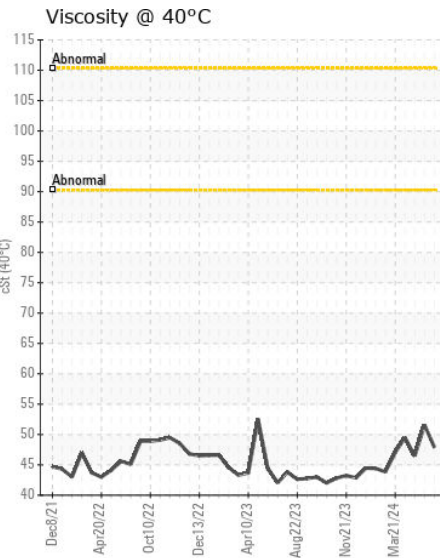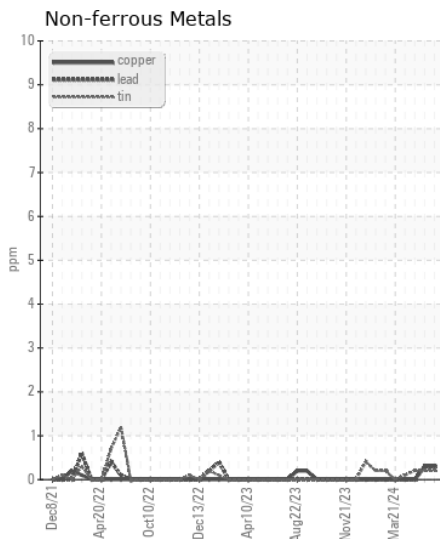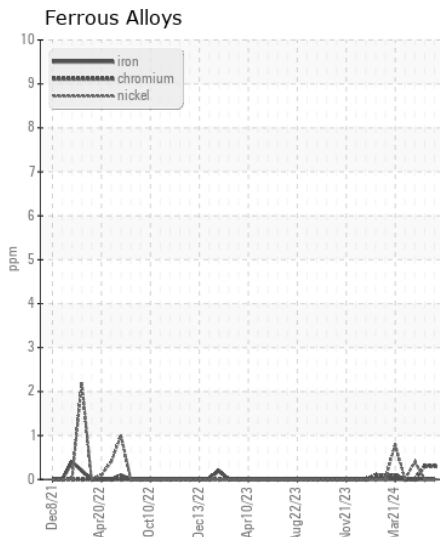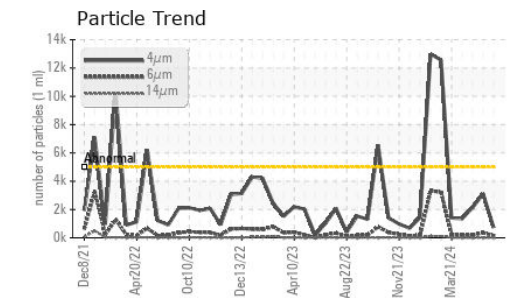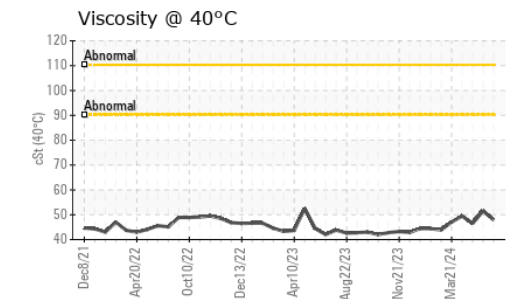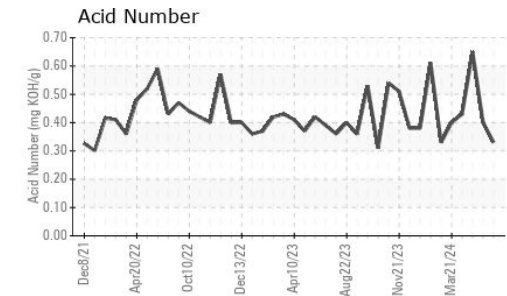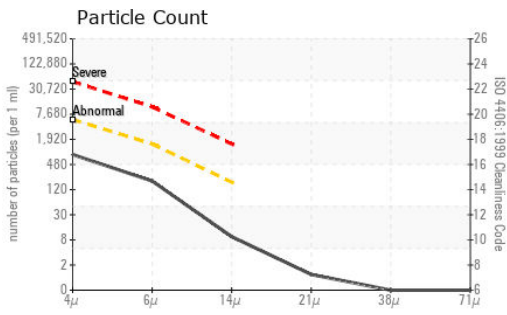

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0033724  
**Lab Number** : 06232683  
**Unique Number** : 11116176  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, VI )

**Received** : 10 Jul 2024  
**Tested** : 12 Jul 2024  
**Diagnosed** : 12 Jul 2024 - Angela Borella

**THE UNITED OIL COMPANY - OPERATIONS**  
 4405 E. BALTIMORE ST  
 BALTIMORE, MD  
 US 21224  
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (410)327-7695