



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ALS 10W30/308
 Component
New (Unused) Oil
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033735	DC0033928	DC0035581
Sample Date		Client Info		18 Jun 2024	30 May 2024	01 May 2024
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR









Iron	ppm	ASTM D5185m		<1	0	0
Chromium	ppm	ASTM D5185m		<1	0	<1
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		3	<1	1
Lead	ppm	ASTM D5185m		<1	<1	0
Copper	ppm	ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m		<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Silicon	ppm	ASTM D5185m		4	5	0
Potassium	ppm	ASTM D5185m	>20	2	1	0
Water		WC Method		NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	1	<1
Boron	ppm	ASTM D5185m		11	3	29
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		56	54	57
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		861	888	962
Calcium	ppm	ASTM D5185m		1065	1075	1043
Phosphorus	ppm	ASTM D5185m		970	1055	1035
Zinc	ppm	ASTM D5185m		1132	1241	1210
Sulfur	ppm	ASTM D5185m		2963	3863	3780
Acid Number (AN)	mg KOH/g	ASTM D8045		1.81	2.69	1.98
Base Number (BN)	mg KOH/g	ASTM D2896		9.46	9.83	10.33
Visc @ 40°C	cSt	ASTM D445		74.14	75.17	72.2
Visc @ 100°C	cSt	ASTM D445		11.69	11.82	11.08
Viscosity Index (VI)	Scale	ASTM D2270		152	152	144

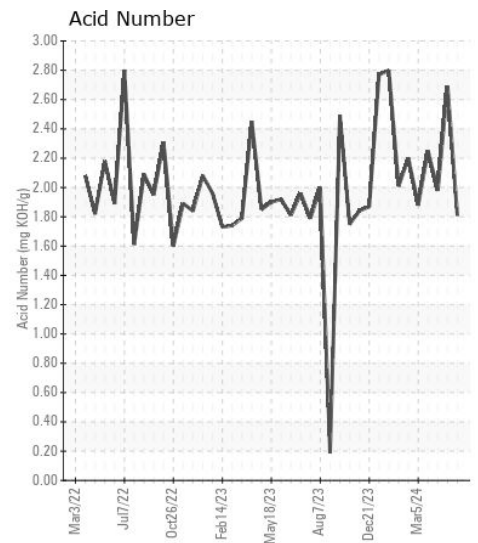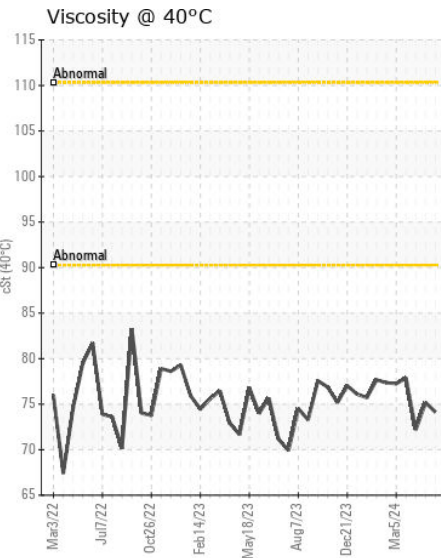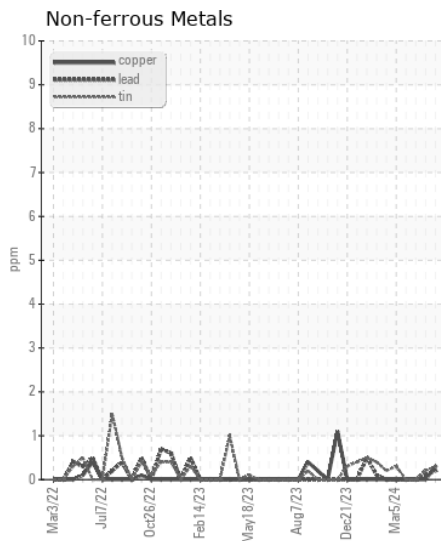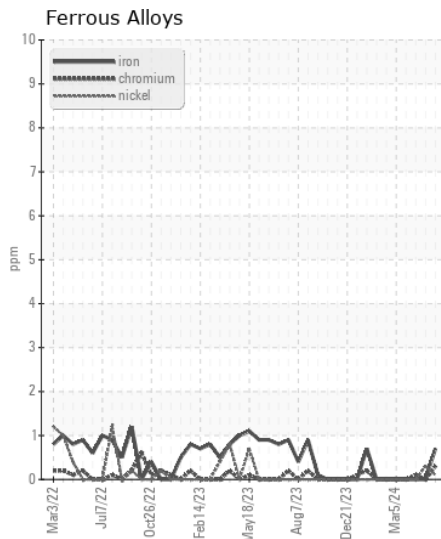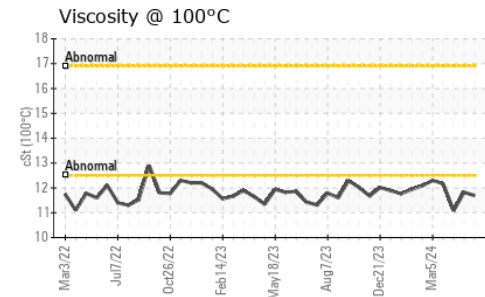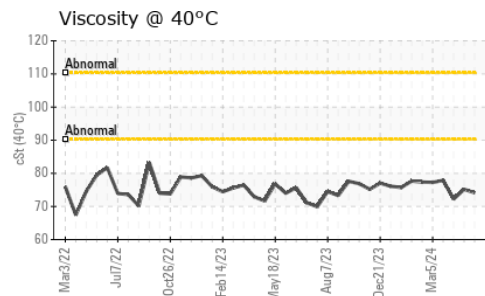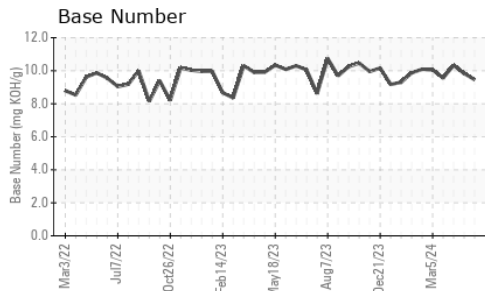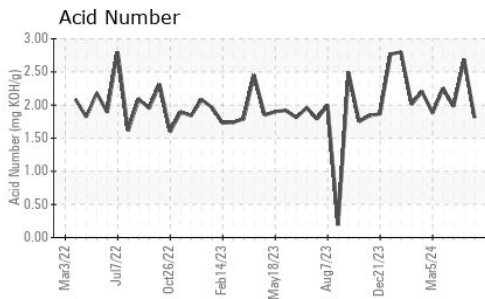

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033735
Lab Number : 06232694
Unique Number : 11116187
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, Viscosity)

THE UNITED OIL COMPANY - OPERATIONS
 4405 E. BALTIMORE ST
 BALTIMORE, MD
 US 21224
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (410)327-7695
 F: (410)327-7695