



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
ALS 15W40/309
 Component
New (Unused) Oil
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033682	DC0033683	DC0033675
Sample Date		Client Info		27 Jun 2024	27 Jun 2024	25 Jun 2024
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	---

WEAR









Iron	ppm	ASTM D5185m		2	2	2
Chromium	ppm	ASTM D5185m		<1	<1	<1
Nickel	ppm	ASTM D5185m		<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		3	3	3
Lead	ppm	ASTM D5185m		<1	0	<1
Copper	ppm	ASTM D5185m		<1	<1	<1
Tin	ppm	ASTM D5185m		<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Silicon	ppm	ASTM D5185m		5	5	6
Potassium	ppm	ASTM D5185m	>20	3	3	3
Water		WC Method		NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m		<1	<1	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	4	2
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		42	73	38
Calcium	ppm	ASTM D5185m		2006	1995	2118
Phosphorus	ppm	ASTM D5185m		817	832	829
Zinc	ppm	ASTM D5185m		923	940	946
Sulfur	ppm	ASTM D5185m		3226	3370	3429
Acid Number (AN)	mg KOH/g	ASTM D8045		1.69	1.70	1.68
Base Number (BN)	mg KOH/g	ASTM D2896		7.87	8.24	8.92
Visc @ 40°C	cSt	ASTM D445		99.8	99.6	98.9
Visc @ 100°C	cSt	ASTM D445		14.11	14.09	---
Viscosity Index (VI)	Scale	ASTM D2270		144	144	---

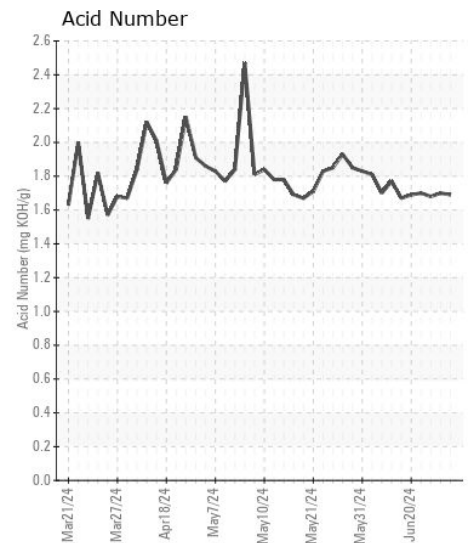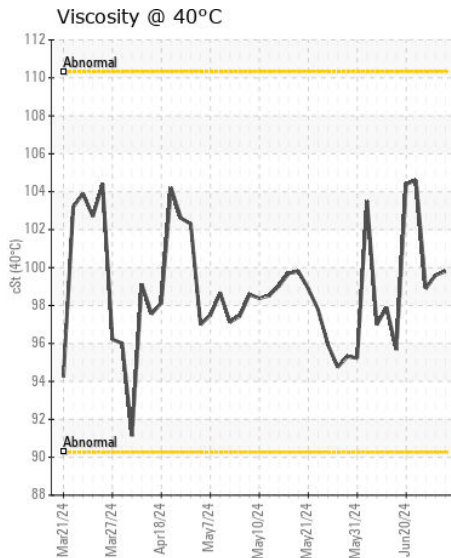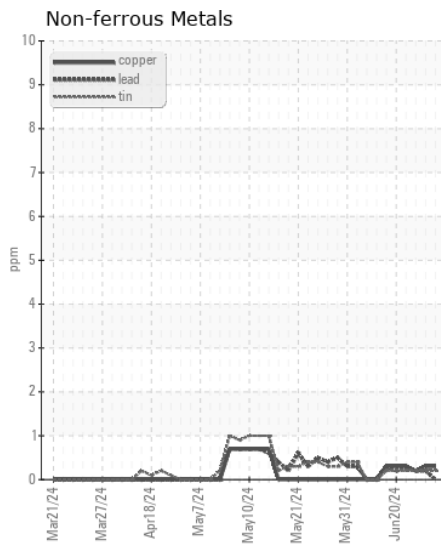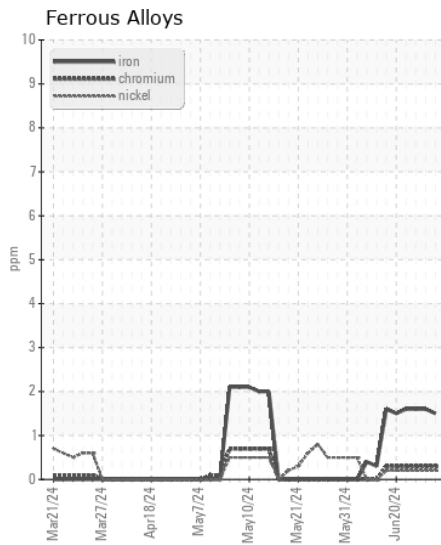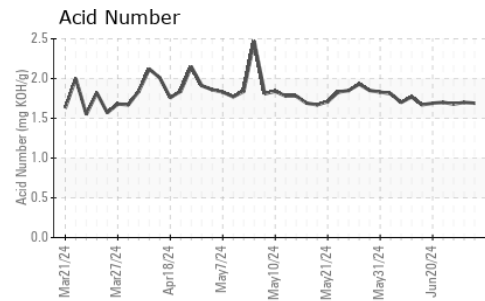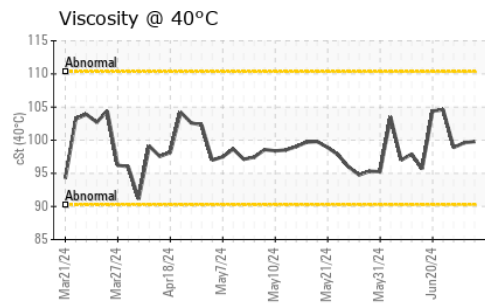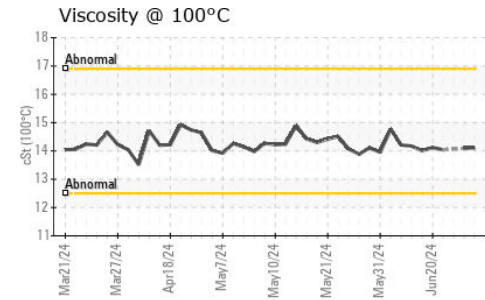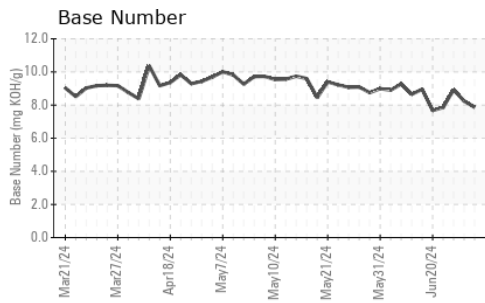

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033682
Lab Number : 06232697
Unique Number : 11116190
Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, Viscosity)

THE UNITED OIL COMPANY - OPERATIONS
 4405 E. BALTIMORE ST
 BALTIMORE, MD
 US 21224
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (410)327-7695
 F: (410)327-7695