



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**ALS DEXOS 5W30**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- LTR)**

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0033601</b>	DC0033598	DC0035561
Sample Date		Client Info		<b>18 Jun 2024</b>	18 Jun 2024	01 May 2024
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR










Iron	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Chromium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>3</b>	3	1
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

Silicon	ppm	ASTM D5185m		<b>8</b>	7	9
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Water		WC Method		<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

## FLUID CONDITION

Sodium	ppm	ASTM D5185m		<b>1</b>	1	0
Boron	ppm	ASTM D5185m		<b>216</b>	212	249
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>64</b>	63	65
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>474</b>	467	535
Calcium	ppm	ASTM D5185m		<b>1137</b>	1147	1178
Phosphorus	ppm	ASTM D5185m		<b>697</b>	633	684
Zinc	ppm	ASTM D5185m		<b>697</b>	700	747
Sulfur	ppm	ASTM D5185m		<b>2593</b>	2643	3140
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.63</b>	1.64	1.79
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.39</b>	7.91	8.61
Visc @ 40°C	cSt	ASTM D445		<b>57.97</b>	57.29	59.8
Visc @ 100°C	cSt	ASTM D445		<b>10.57</b>	10.48	10.09
Viscosity Index (VI)	Scale	ASTM D2270		<b>174</b>	174	156

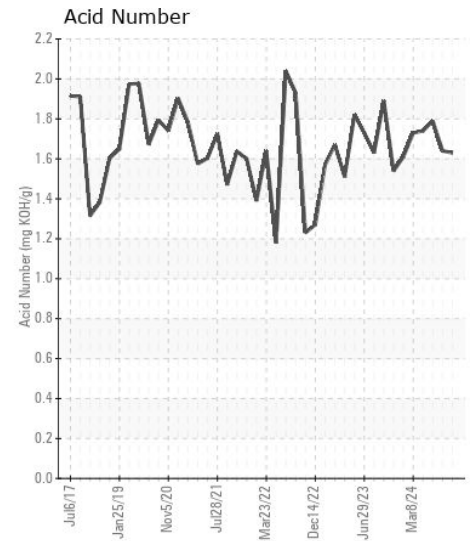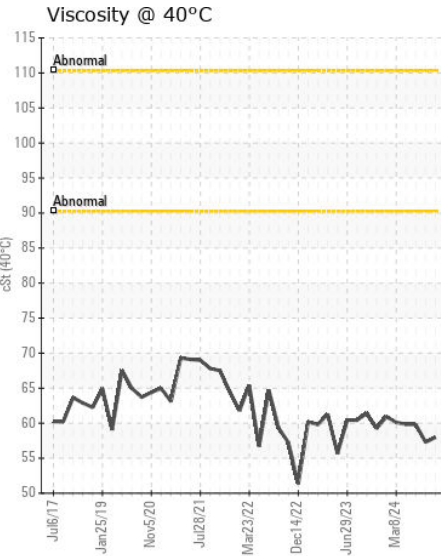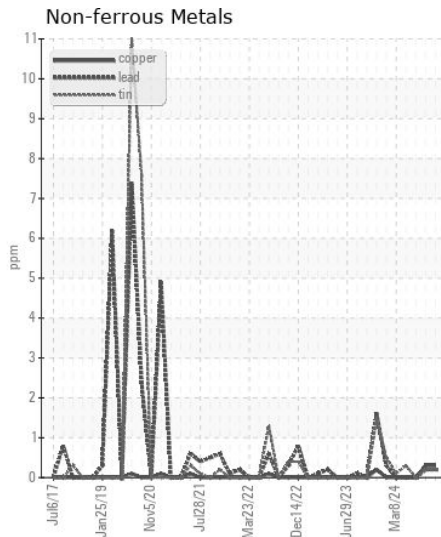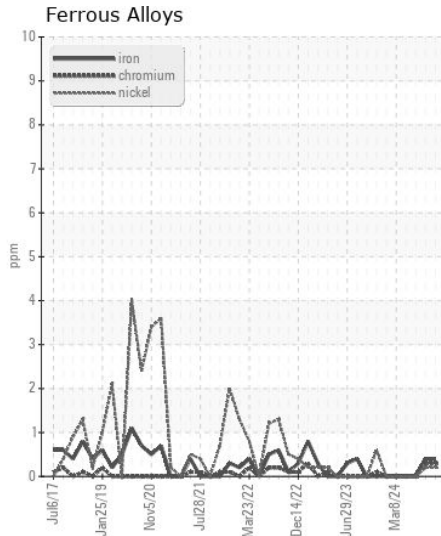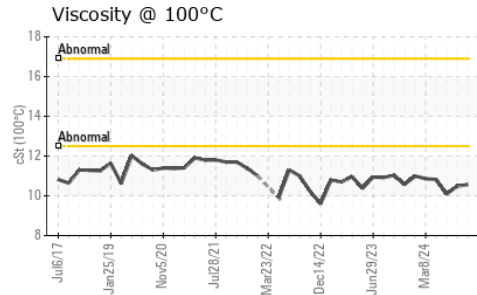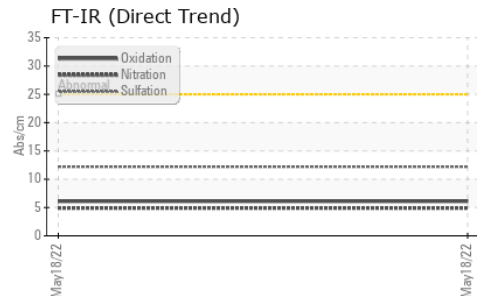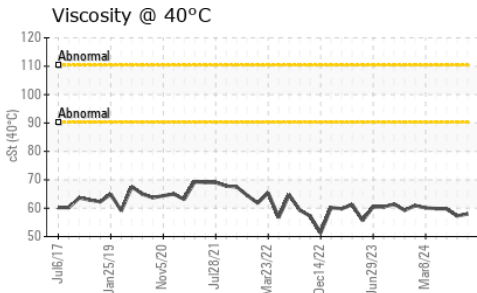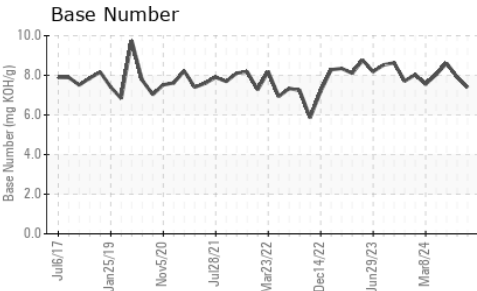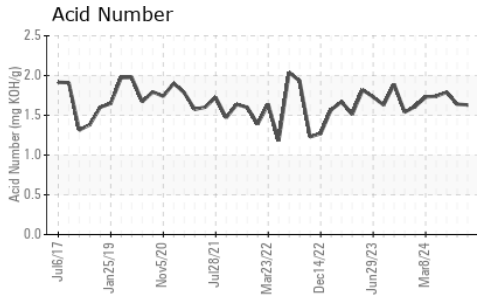

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0033601  
**Lab Number** : 06232706  
**Unique Number** : 11116199  
**Test Package** : MOB 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, ~~0~~)

**THE UNITED OIL COMPANY - OPERATIONS**  
 4405 E. BALTIMORE ST  
 BALTIMORE, MD  
 US 21224  
 Contact: MICHELLE HORNING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (410)327-7695