



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SURVEY - SEAVER [SURVEY-SEAVER]

Machine Id
VOLVO PENTA 3940029356

Component
Port IPS

Fluid
GEAR OIL SAE 75W90 (4 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

The water content is negligible. No other contaminants were detected in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA059567	---	---
Sample Date		Client Info		08 Jul 2024	---	---
Machine Age	hrs	Client Info		323	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---
PQ		ASTM D8184		19	---	---
Iron	ppm	ASTM D5185m	>275	27	---	---
Chromium	ppm	ASTM D5185m	>4	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m	>3	<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>4	<1	---	---
Copper	ppm	ASTM D5185m	>30	6	---	---
Tin	ppm	ASTM D5185m	>3	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>35	11	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water	%	ASTM D6304	>0.2	0.166	---	---
ppm Water	ppm	ASTM D6304	>2000	1660	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	0.2%	---	---
Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	400	331	---	---
Barium	ppm	ASTM D5185m	200	1	---	---
Molybdenum	ppm	ASTM D5185m	12	<1	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m	12	92	---	---
Calcium	ppm	ASTM D5185m	150	10	---	---
Phosphorus	ppm	ASTM D5185m	1650	1244	---	---
Zinc	ppm	ASTM D5185m	125	10	---	---
Sulfur	ppm	ASTM D5185m	22500	22639	---	---
Visc @ 40°C	cSt	ASTM D445	109	104.2	---	---

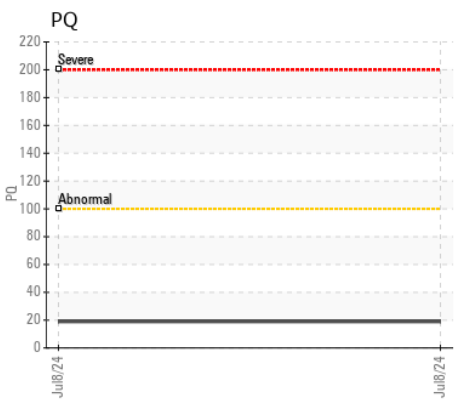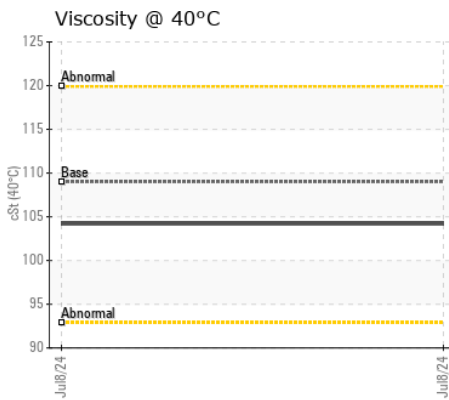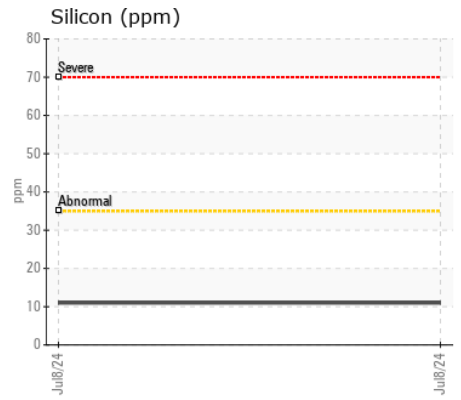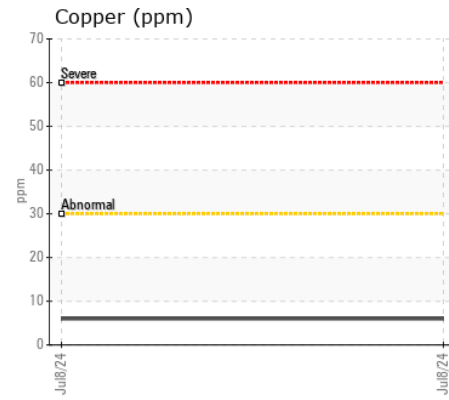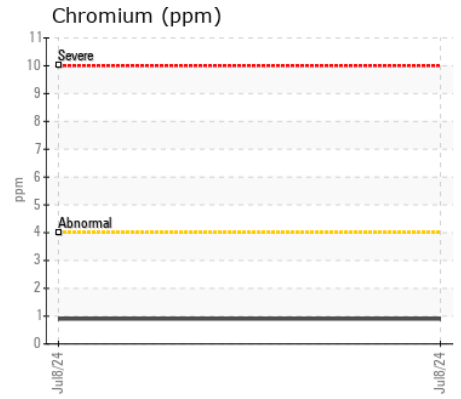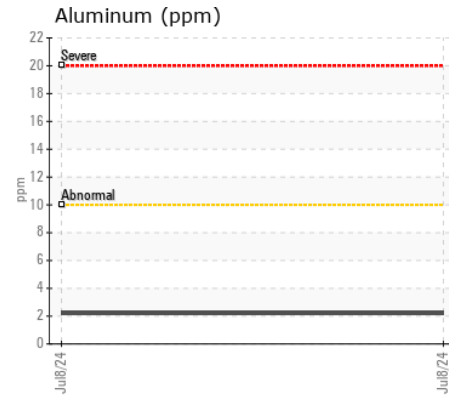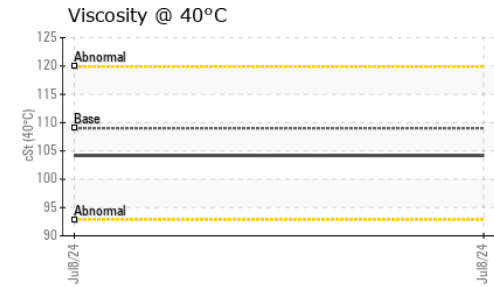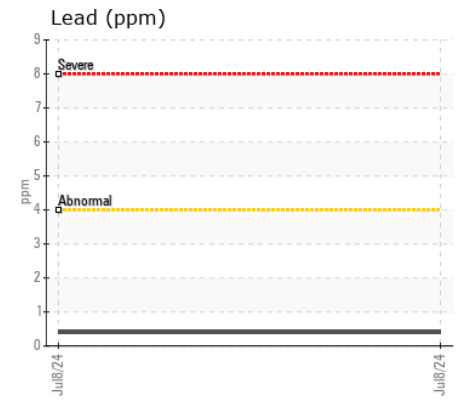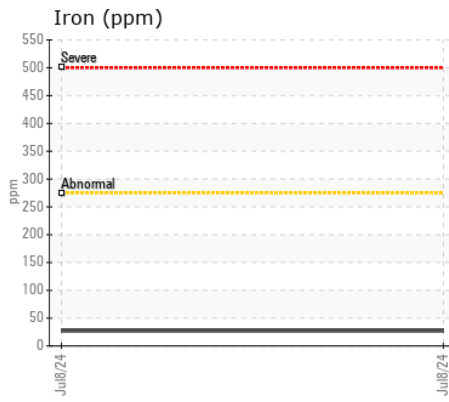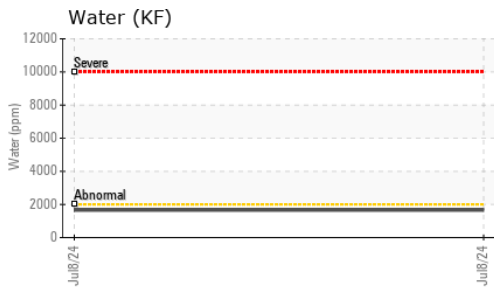

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA059567 **Received** : 10 Jul 2024
Lab Number : 06232747 **Tested** : 10 Jul 2024
Unique Number : 11116240 **Diagnosed** : 10 Jul 2024 - Doug Bogart
Test Package : MOB 1 (Additional Tests: KF, PQ)

Suncoast Diesel Marine Inc.
 610 Mount Vernan St
 OLDSMAR, FL
 US 34677
 Contact: MARK WARREN
 oldsmar@suncoastdmi.com
 T: (813)475-5942
 F: (813)475-5943

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)