



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**Store 9 - Marietta**

Machine Id  
**KENWORTH 44**

Component  
**Diesel Engine**

Fluid  
**SHELL ROTELLA T 15W40 (10 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050849	LEC0050207	LEC0048270
Sample Date		Client Info		02 Jul 2024	21 May 2024	09 Apr 2024
Machine Age	mls	Client Info		1090820	1077300	1067399
Oil Age	mls	Client Info		10000	10000	10000
Filter Age	mls	Client Info		10000	10000	10000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	25	20	25
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		2	2	1
Silver	ppm	ASTM D5185m	>3	<1	1	0
Aluminum	ppm	ASTM D5185m	>20	3	3	4
Lead	ppm	ASTM D5185m	>40	8	4	10
Copper	ppm	ASTM D5185m	>330	2	2	1
Tin	ppm	ASTM D5185m	>15	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	6	7	8
Potassium	ppm	ASTM D5185m	>20	3	2	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.3	10.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	23.8	25.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	1	<1
Boron	ppm	ASTM D5185m	316	198	290	206
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	87	93	109
Manganese	ppm	ASTM D5185m		<1	1	0
Magnesium	ppm	ASTM D5185m	24	428	479	559
Calcium	ppm	ASTM D5185m	2292	1497	1473	1573
Phosphorus	ppm	ASTM D5185m	1064	1089	1028	976
Zinc	ppm	ASTM D5185m	1160	1281	1204	1106
Sulfur	ppm	ASTM D5185m	4996	3163	3781	2955
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	18.2	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	6.6	7.1	7.5
Visc @ 100°C	cSt	ASTM D445	15.7	13.6	13.5	13.7

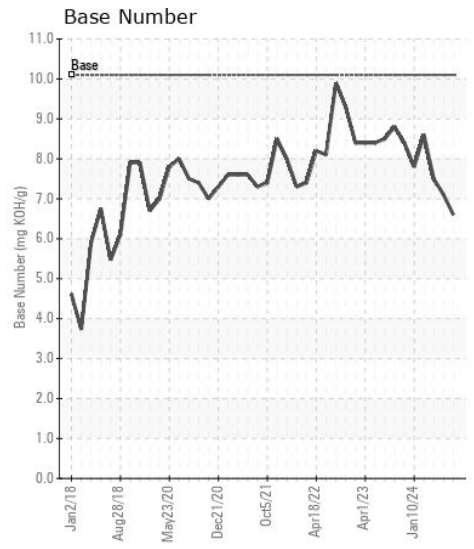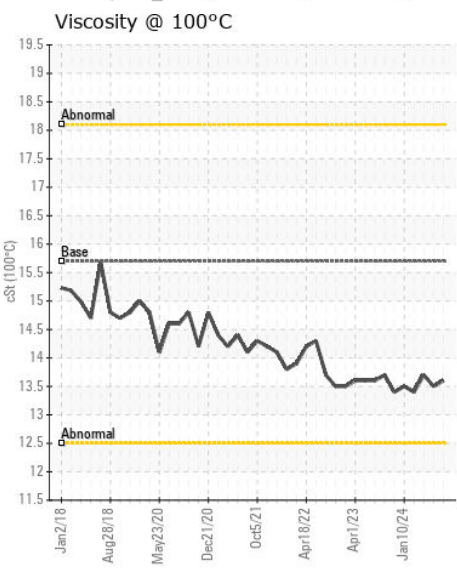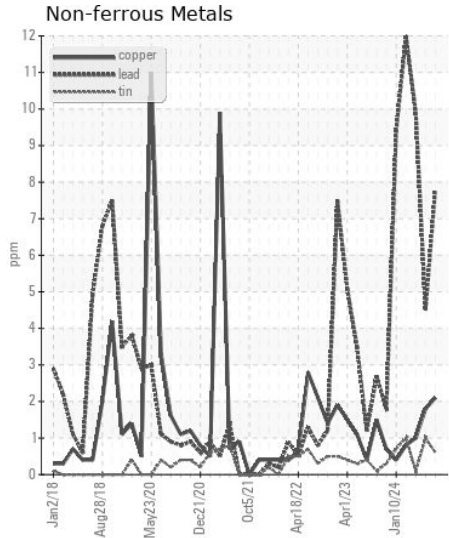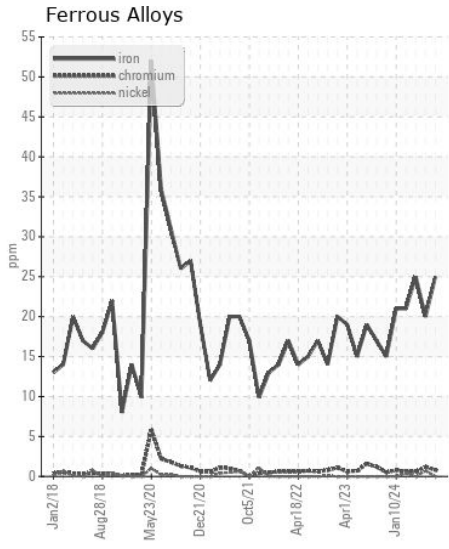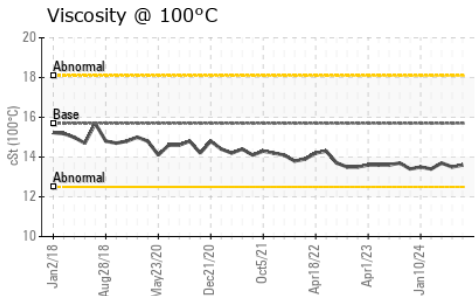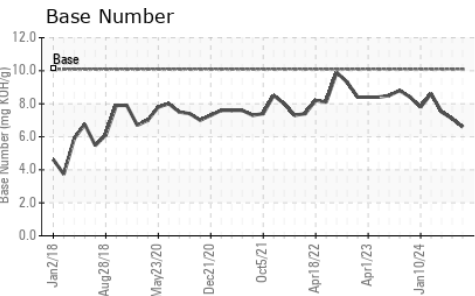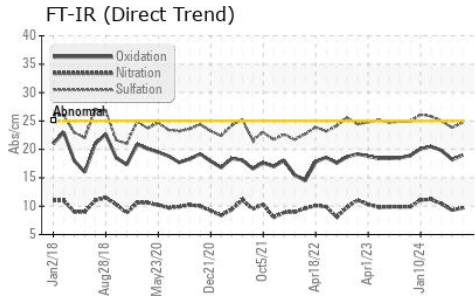

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0050849  
**Lab Number** : 06233065  
**Unique Number** : 11116558  
**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 11 Jul 2024  
**Tested** : 11 Jul 2024  
**Diagnosed** : 12 Jul 2024 - Don Baldrige

**HALL DRILLING LLC**  
 PO BOX 249  
 ELLENBORO, WV  
 US 26346

Contact: CHRIS PETROVICH  
 chrispetrovich@halldrilling.com  
 T: (304)869-3404  
 F: (304)869-3408

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)