



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 848L 1DW848LBANF713291
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (30 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221056	JR0201253	JR0182476
Sample Date		Client Info		09 Jul 2024	26 Feb 2024	08 Sep 2023
Machine Age	hrs	Client Info		2494	2009	1537
Oil Age	hrs	Client Info		485	472	159
Filter Age	hrs	Client Info		485	472	159
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	18	20	11
Chromium	ppm	ASTM D5185m	>11	<1	1	<1
Nickel	ppm	ASTM D5185m	>5	3	6	4
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>31	7	7	2
Lead	ppm	ASTM D5185m	>26	<1	<1	0
Copper	ppm	ASTM D5185m	>26	2	4	9
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	8	8	6
Potassium	ppm	ASTM D5185m	>20	13	14	7
Fuel	%	ASTM D3524	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.4	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.7	21.1	20.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	0	2	2
Boron	ppm	ASTM D5185m		231	178	247
Barium	ppm	ASTM D5185m		0	2	<1
Molybdenum	ppm	ASTM D5185m		265	237	254
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		817	759	862
Calcium	ppm	ASTM D5185m		1452	1233	1442
Phosphorus	ppm	ASTM D5185m		973	842	907
Zinc	ppm	ASTM D5185m		1126	1004	1096
Sulfur	ppm	ASTM D5185m		2977	3085	3612
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	15.2	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.7	8.8	9.9
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	13.3	13.4


FT-IR (Direct Trend)

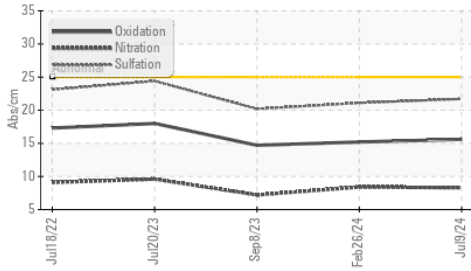


Ferrous Alloys

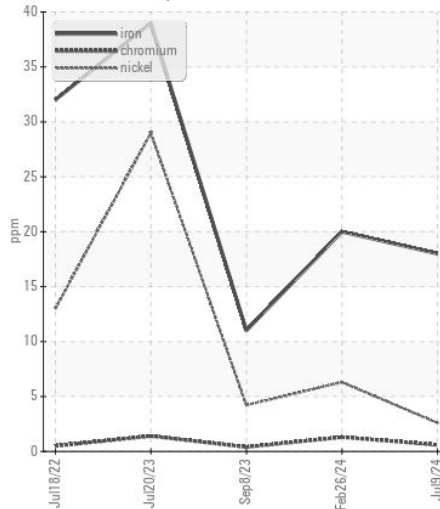


Base Number

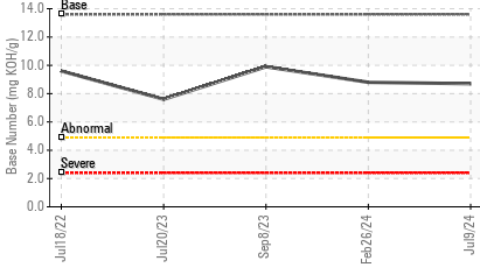


Non-ferrous Metals

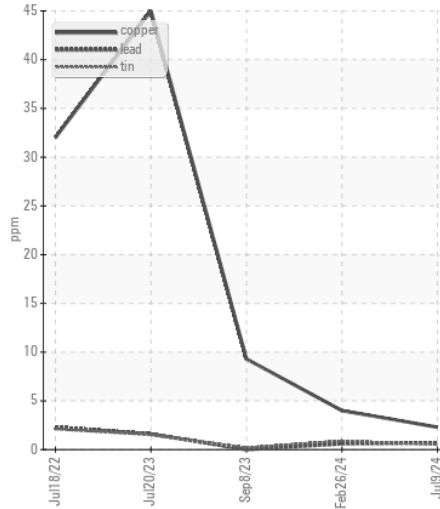


Viscosity @ 100°C

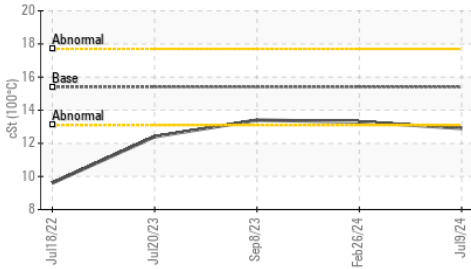


Fuel Dilution

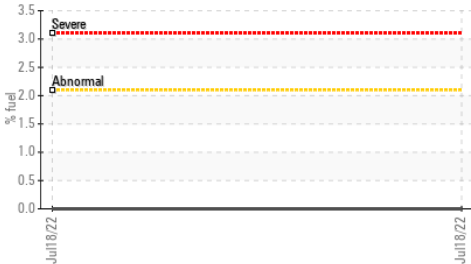

Viscosity @ 100°C

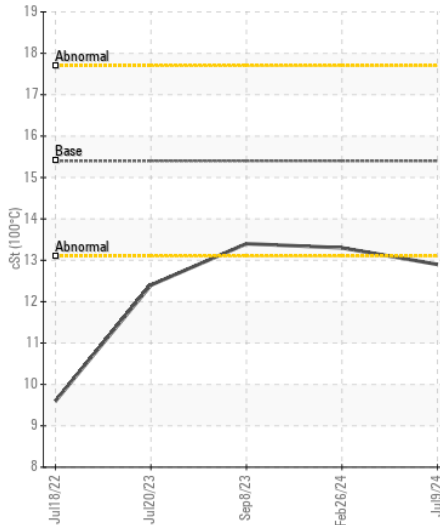

Base Number

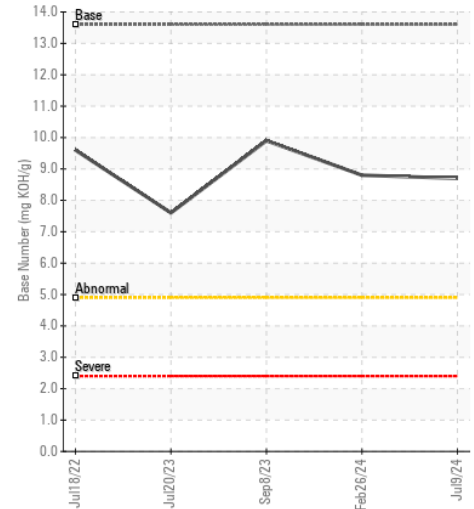

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221056 **Received** : 11 Jul 2024
Lab Number : 06233066 **Tested** : 12 Jul 2024
Unique Number : 11116559 **Diagnosed** : 12 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, TBN)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com;canastasio@wearcheckusa.com
 T:
 F: