



Area

**[47701]**

Machine Id

**JOHN DEERE 470 P 1FF470PAVPF000293**

Component

**Diesel Engine**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (46 QTS)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225358</b>	JR0202993	---
Sample Date		Client Info		<b>10 Jul 2024</b>	21 Feb 2024	---
Machine Age	hrs	Client Info		<b>983</b>	492	---
Oil Age	hrs	Client Info		<b>491</b>	492	---
Filter Age	hrs	Client Info		<b>0</b>	492	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

### WEAR

The copper level has decreased, but is still abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>35</b>	41	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>7</b>	10	---
Lead	ppm	ASTM D5185m	>26	<b>24</b>	16	---
Copper	ppm	ASTM D5185m	>26	<b>▲ 72</b>	▲ 363	---
Tin	ppm	ASTM D5185m	>4	<b>4</b>	8	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>8</b>	12	---
Potassium	ppm	ASTM D5185m	>20	<b>19</b>	33	---
Fuel	%	ASTM D3524	>2.1	<b>&lt;1.0</b>	0.8	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.1</b>	23.8	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	<b>15</b>	13	---
Boron	ppm	ASTM D5185m		<b>59</b>	179	---
Barium	ppm	ASTM D5185m		<b>0</b>	1	---
Molybdenum	ppm	ASTM D5185m		<b>221</b>	204	---
Manganese	ppm	ASTM D5185m		<b>2</b>	8	---
Magnesium	ppm	ASTM D5185m		<b>817</b>	733	---
Calcium	ppm	ASTM D5185m		<b>1605</b>	1489	---
Phosphorus	ppm	ASTM D5185m		<b>909</b>	952	---
Zinc	ppm	ASTM D5185m		<b>1105</b>	1104	---
Sulfur	ppm	ASTM D5185m		<b>3193</b>	2991	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.7</b>	18.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>7.5</b>	7.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>● 12.4</b>	▲ 10.5	---

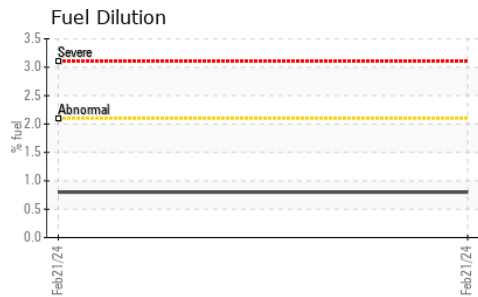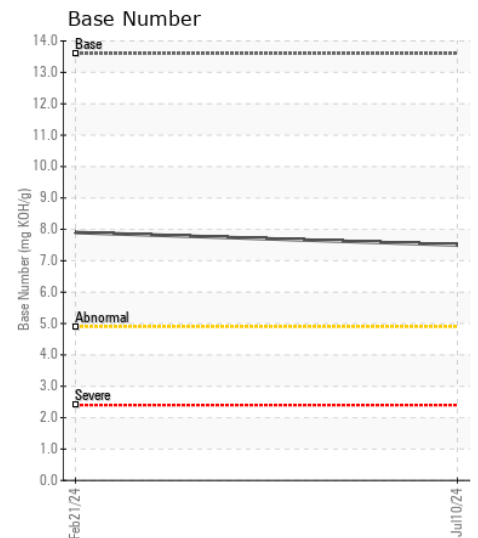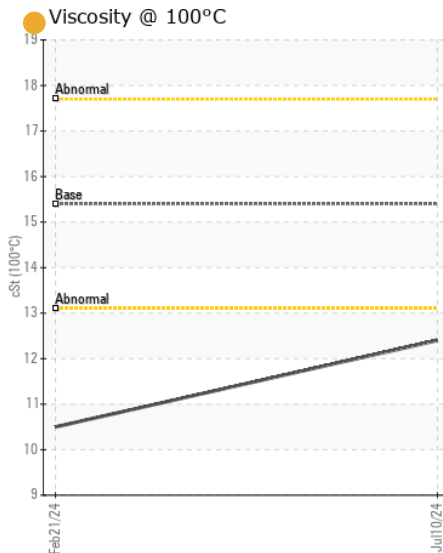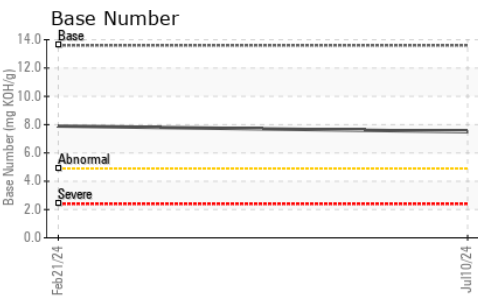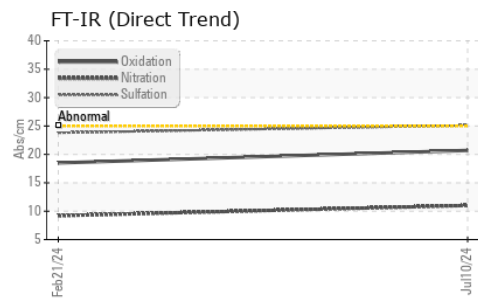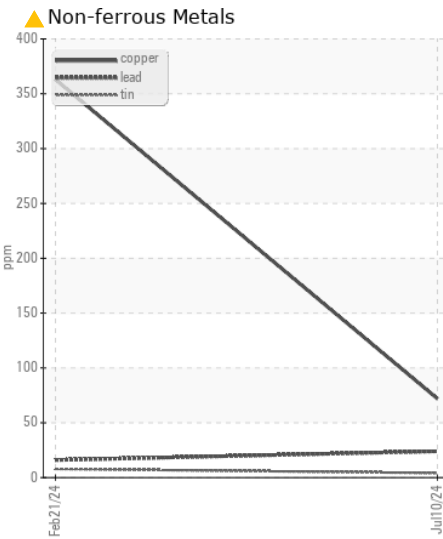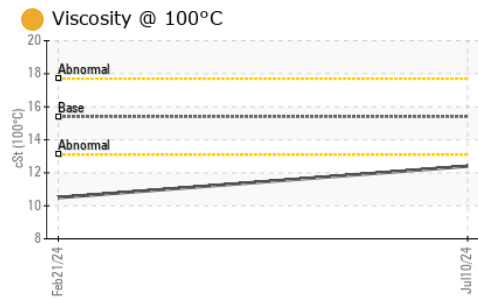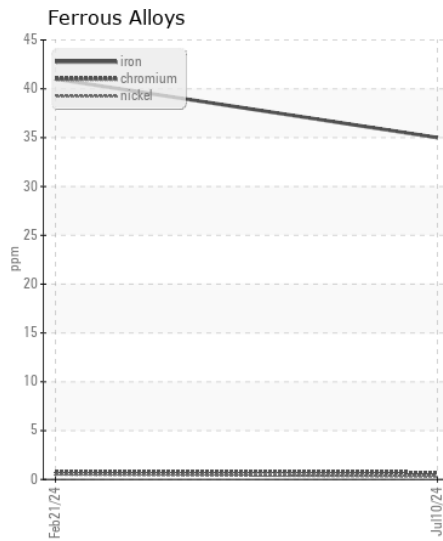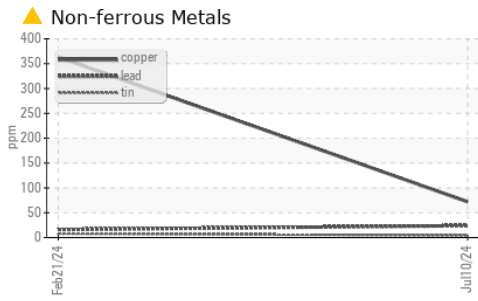

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225358 **Received** : 11 Jul 2024  
**Lab Number** : 06233081 **Tested** : 12 Jul 2024  
**Unique Number** : 11116574 **Diagnosed** : 12 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, TBN )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)