



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 325G 1T0325GKCMJ407208**

Component  
**Diesel Engine**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0223608</b>	JR0187313	---
Sample Date		Client Info		<b>10 Jul 2024</b>	23 Oct 2023	---
Machine Age	hrs	Client Info		<b>2112</b>	1659	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>23</b>	19	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>8</b>	6	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>26	<b>3</b>	7	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>18</b>	16	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.3</b>	22.6	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>3</b>	2	---
Boron	ppm	ASTM D5185m		<b>184</b>	196	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>267</b>	246	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>856</b>	828	---
Calcium	ppm	ASTM D5185m		<b>1569</b>	1510	---
Phosphorus	ppm	ASTM D5185m		<b>927</b>	886	---
Zinc	ppm	ASTM D5185m		<b>1089</b>	1111	---
Sulfur	ppm	ASTM D5185m		<b>3233</b>	2929	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.8</b>	18.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.4</b>	7.9	---
Visc @ 100°C	cSt	ASTM D445		<b>14.0</b>	13.8	---

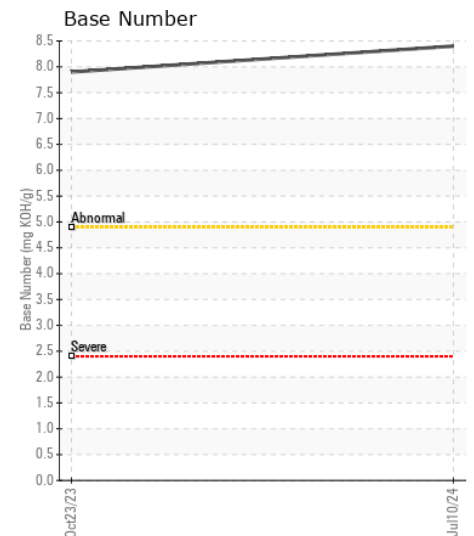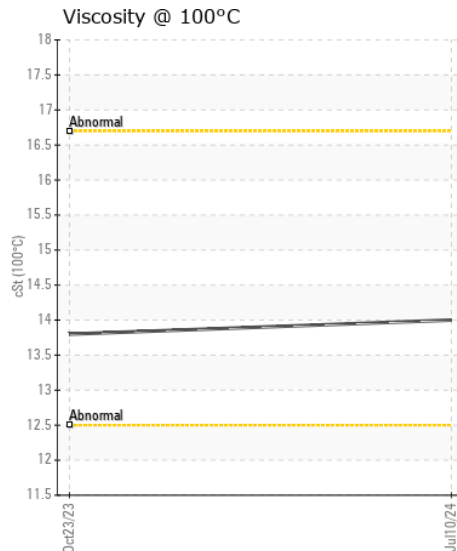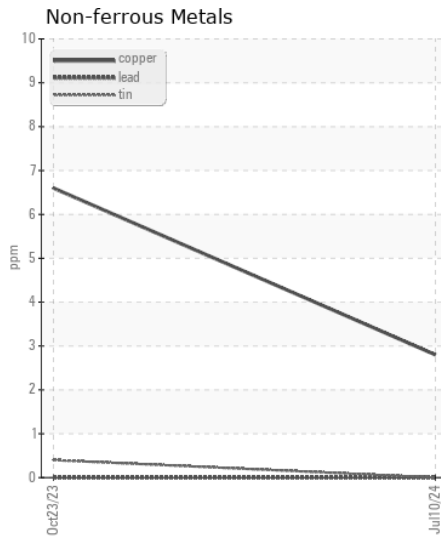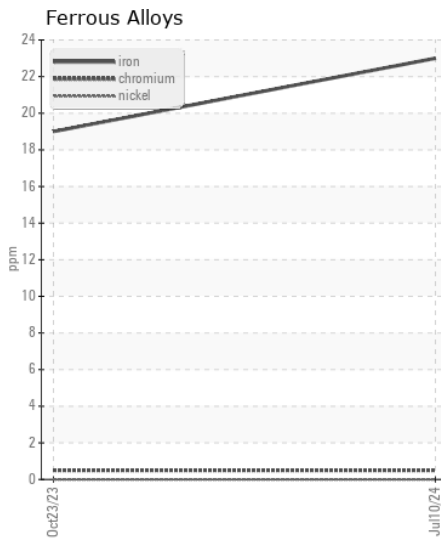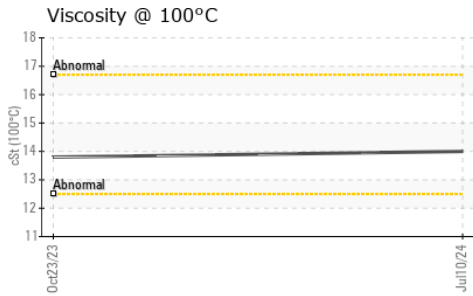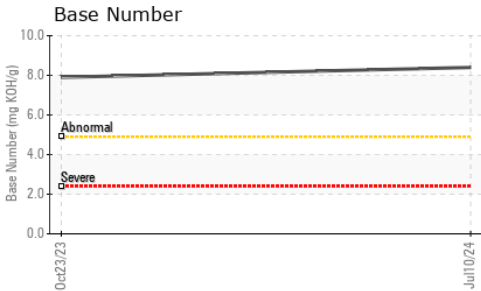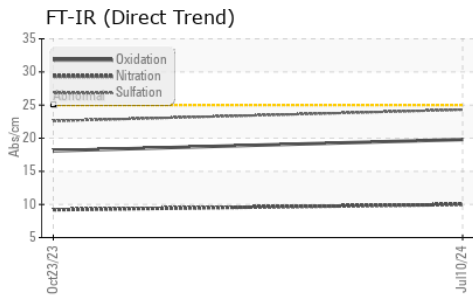

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0223608 **Received** : 11 Jul 2024  
**Lab Number** : 06233125 **Tested** : 12 Jul 2024  
**Unique Number** : 11116618 **Diagnosed** : 12 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)