



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 310E 1DW310EXVMF712829
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (140 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218494	JR0211103	JR0199049
Sample Date		Client Info		09 Jul 2024	01 Apr 2024	04 Jan 2024
Machine Age	hrs	Client Info		5727	5087	4470
Oil Age	hrs	Client Info		5727	5087	4470
Filter Age	hrs	Client Info		5727	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184	>50	16	13	14
Iron	ppm	ASTM D5185m	>71	8	8	4
Chromium	ppm	ASTM D5185m	>11	2	2	<1
Nickel	ppm	ASTM D5185m	>6	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>11	0	<1	2
Lead	ppm	ASTM D5185m	>13	0	0	<1
Copper	ppm	ASTM D5185m	>21	0	3	2
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>24	2	2	2
Potassium	ppm	ASTM D5185m	>20	<1	3	5
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	6170	13081	3830
Particles >6µm		ASTM D7647	>5000	720	113	1436
Particles >14µm		ASTM D7647	>640	39	8	181
Particles >21µm		ASTM D7647	>160	9	2	51
Particles >38µm		ASTM D7647	>40	0	0	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/19/16	20/17/12	21/14/10	19/18/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	3	4	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	8
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		5	<1	2
Calcium	ppm	ASTM D5185m	87	146	107	89
Phosphorus	ppm	ASTM D5185m	727	707	611	648
Zinc	ppm	ASTM D5185m	900	935	870	912
Sulfur	ppm	ASTM D5185m	1500	2103	1969	1744
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.80	0.70	0.76
Visc @ 40°C	cSt	ASTM D445	65	55.7	56.8	57.8

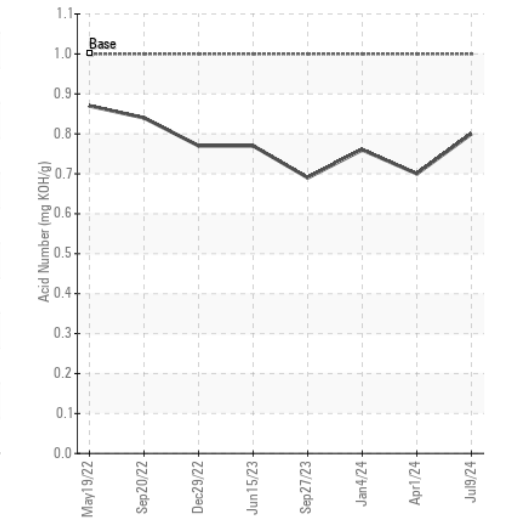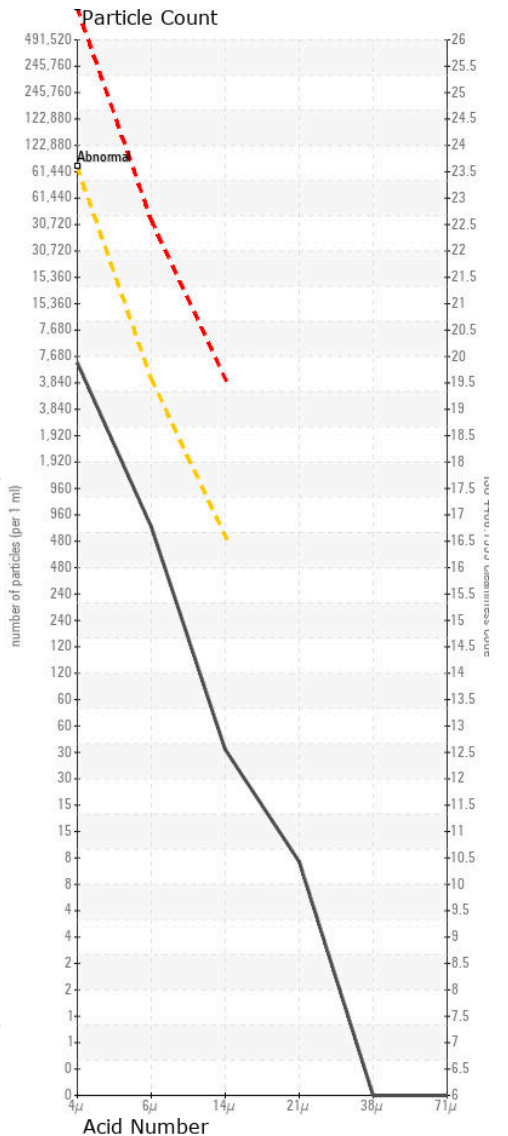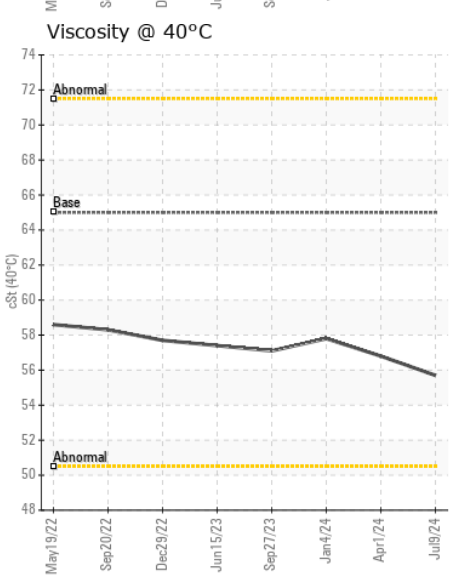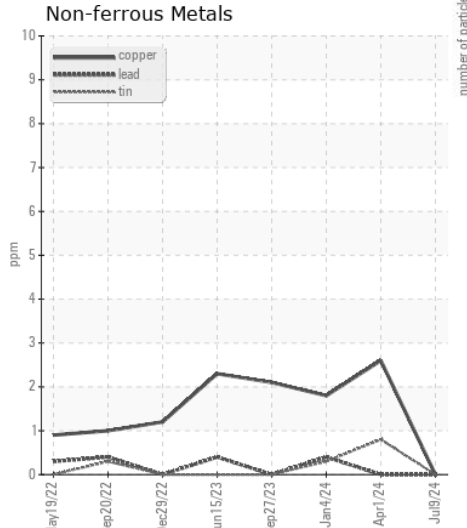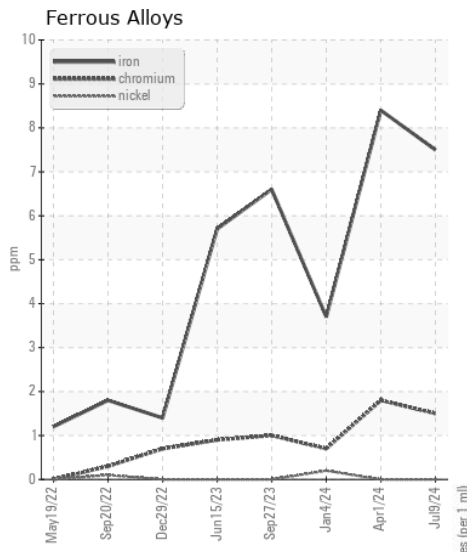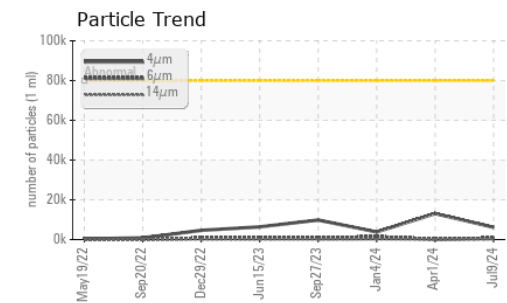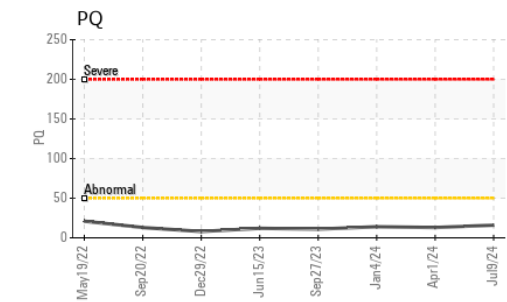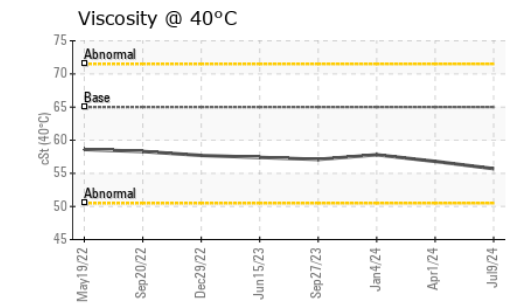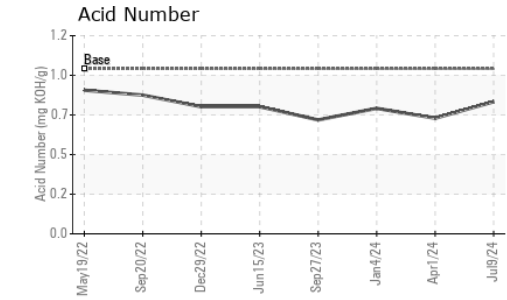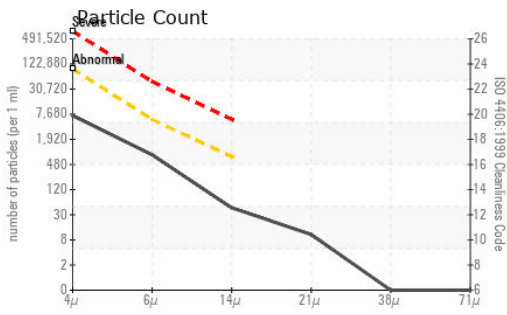

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0218494

Lab Number : 06233200

Unique Number : 11116693

Test Package : CONST (Additional Tests: PQ)

Received : 11 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 12 Jul 2024 - Wes Davis

JRE - MANASSAS PARK

9107 OWENS DRIVE

MANASSAS PARK, VA

US 20111

Contact: BRANDON RATLIFF

brandon.ratliff@jamesriverequipment.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (703)631-4715