



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**N.E.R./Off-Road**  
Machine Id  
**E96**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0122843</b>	PCA0077998	PCA0066839
Sample Date		Client Info		<b>09 Jul 2024</b>	20 Sep 2022	15 Feb 2022
Machine Age	hrs	Client Info		<b>13329</b>	13017	12922
Oil Age	hrs	Client Info		<b>12903</b>	12686	331
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>8</b>	5	10
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	1
Lead	ppm	ASTM D5185m	>40	<b>2</b>	1	<1
Copper	ppm	ASTM D5185m	>330	<b>4</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>14</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	5.5	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.6</b>	19.0	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>11</b>	2	2
Boron	ppm	ASTM D5185m	0	<b>6</b>	6	14
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>59</b>	65	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>923</b>	1026	1001
Calcium	ppm	ASTM D5185m	1070	<b>1087</b>	1136	1259
Phosphorus	ppm	ASTM D5185m	1150	<b>998</b>	1098	1106
Zinc	ppm	ASTM D5185m	1270	<b>1201</b>	1403	1308
Sulfur	ppm	ASTM D5185m	2060	<b>2901</b>	4140	2830
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.2</b>	14.1	14.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>10.11</b>	9.03	10.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.3</b>	14.2	14.2

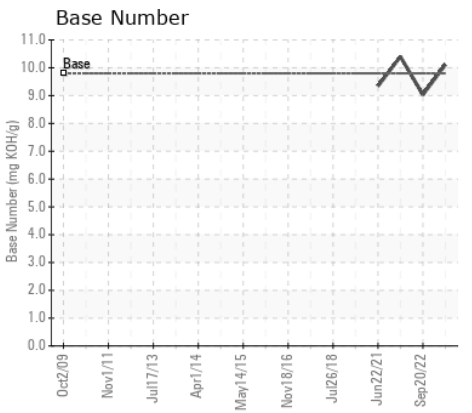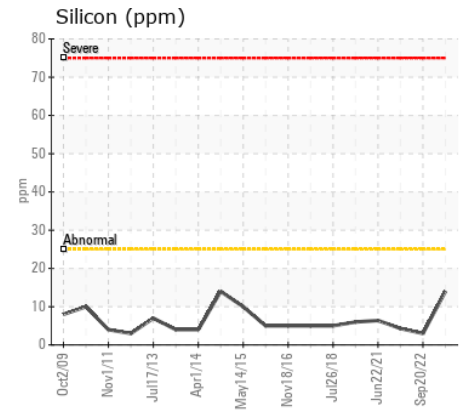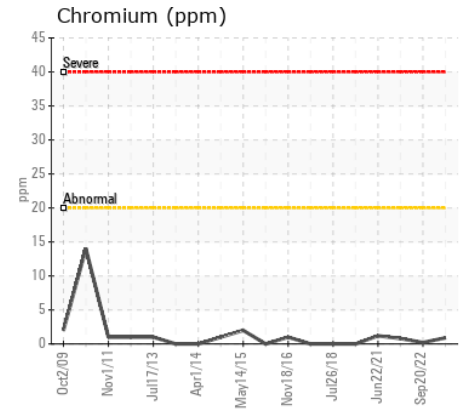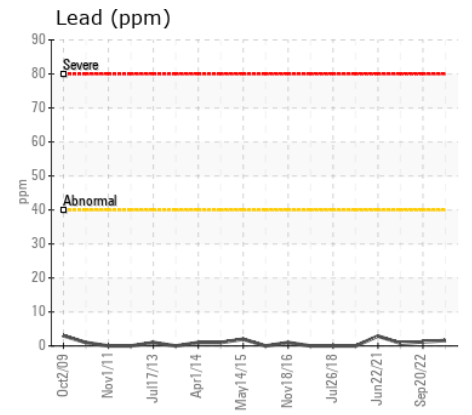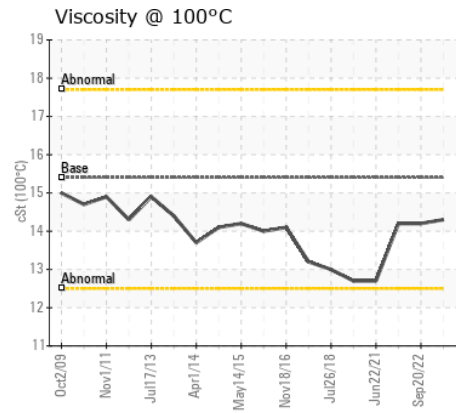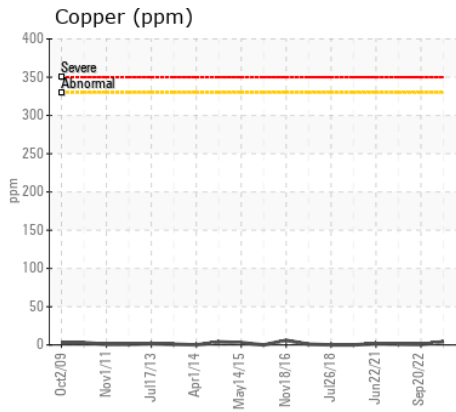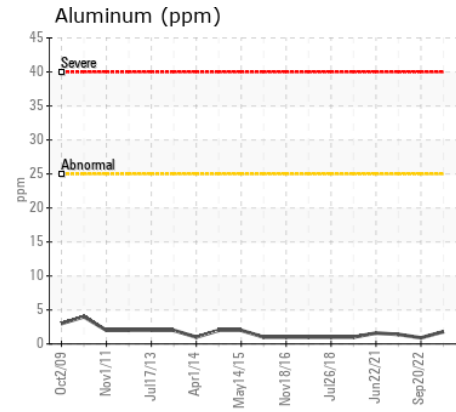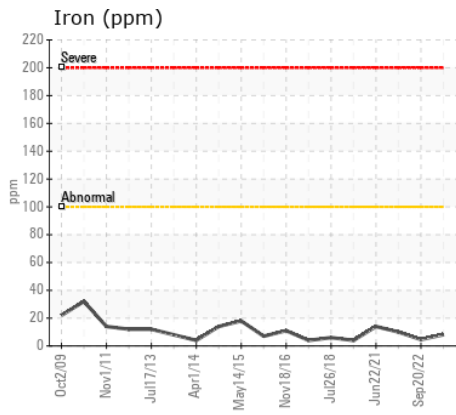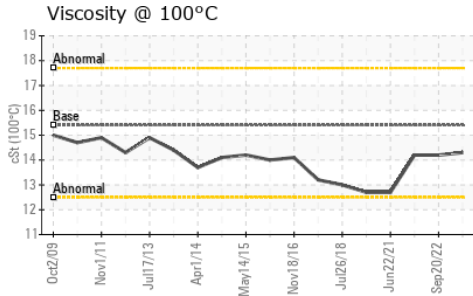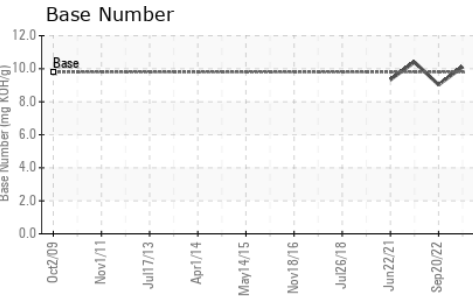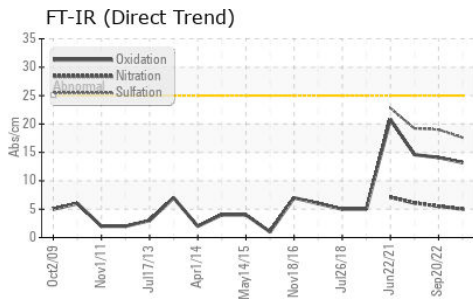

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122843  
**Lab Number** : 06233427  
**Unique Number** : 11116920  
**Test Package** : MOB 2  
**Received** : 11 Jul 2024  
**Tested** : 12 Jul 2024  
**Diagnosed** : 12 Jul 2024 - Wes Davis

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)