



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 331G 1T0331GKHLF385893
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220292	JR0189402	JR0119266
Sample Date		Client Info		09 Jul 2024	09 Nov 2023	11 Feb 2022
Machine Age	hrs	Client Info		2237	2070	1050
Oil Age	hrs	Client Info		0	1020	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	43	87	26
Iron	ppm	ASTM D5185m	>750	645	1626	675
Chromium	ppm	ASTM D5185m	>9	8	23	9
Nickel	ppm	ASTM D5185m	>10	7	17	3
Titanium	ppm	ASTM D5185m		2	4	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	21	59	10
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	2	2	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	2	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	70	157	21
Potassium	ppm	ASTM D5185m	>20	9	22	13
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	6	4
Boron	ppm	ASTM D5185m		8	28	41
Barium	ppm	ASTM D5185m		0	15	24
Molybdenum	ppm	ASTM D5185m		2	4	1
Manganese	ppm	ASTM D5185m		6	15	6
Magnesium	ppm	ASTM D5185m		4	11	6
Calcium	ppm	ASTM D5185m		0	18	20
Phosphorus	ppm	ASTM D5185m		322	293	438
Zinc	ppm	ASTM D5185m		14	33	24
Sulfur	ppm	ASTM D5185m		17770	17741	16489
Visc @ 40°C	cSt	ASTM D445		136	138	134

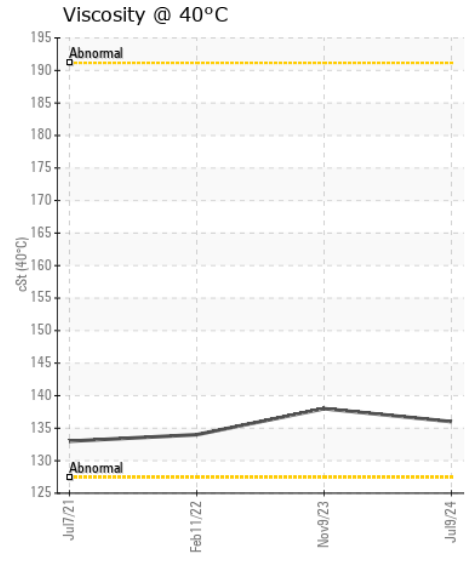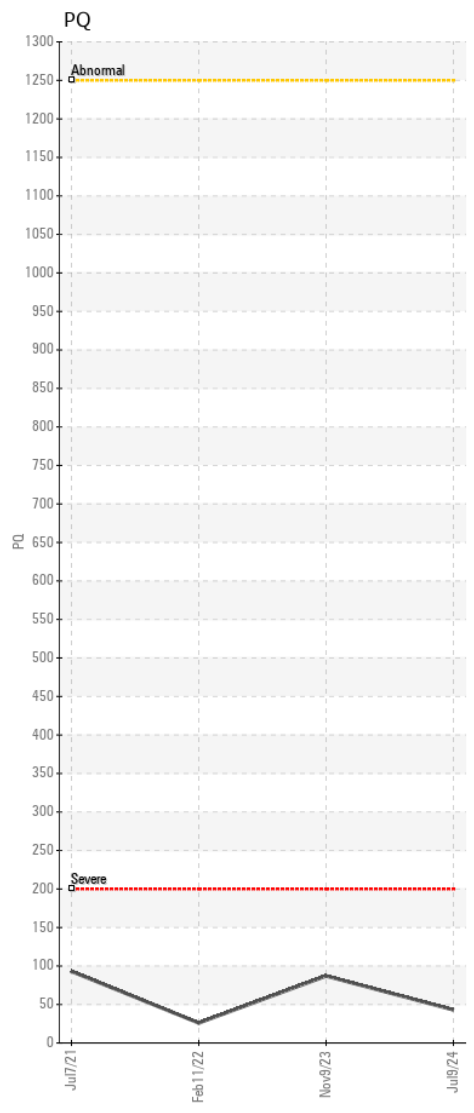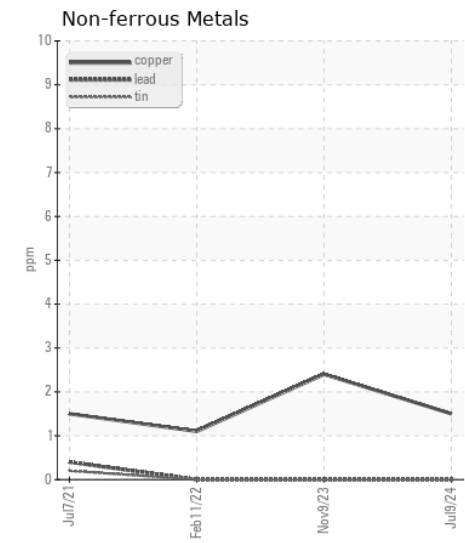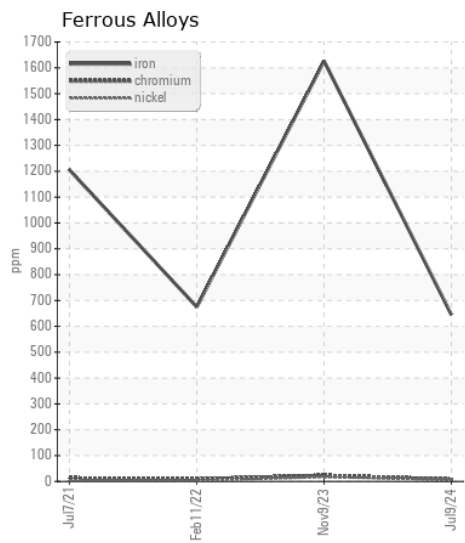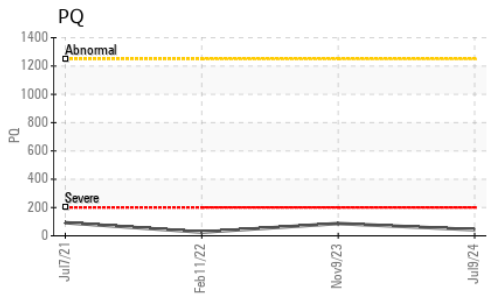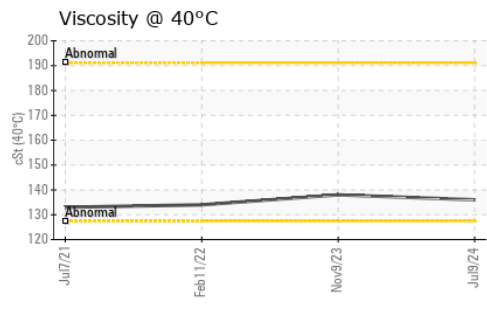

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220292 **Received** : 11 Jul 2024
Lab Number : 06233499 **Tested** : 12 Jul 2024
Unique Number : 11116992 **Diagnosed** : 13 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)