



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 650K 1T0650KKPHF306809**  
Component  
**Left Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218470</b>	JR0190258	JR0125605
Sample Date		Client Info		<b>09 Jul 2024</b>	25 Oct 2023	05 Jul 2022
Machine Age	hrs	Client Info		<b>2968</b>	2413	1932
Oil Age	hrs	Client Info		<b>555</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>None</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>47</b>	56	44
Iron	ppm	ASTM D5185m	>750	<b>42</b>	25	44
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	2	3
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>40	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>12</b>	10	9
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	5
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>0</b>	1	0
Boron	ppm	ASTM D5185m	6	<b>6</b>	2	12
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m	145	<b>95</b>	92	101
Calcium	ppm	ASTM D5185m	3570	<b>3459</b>	3119	3516
Phosphorus	ppm	ASTM D5185m	1290	<b>987</b>	944	1020
Zinc	ppm	ASTM D5185m	1640	<b>1212</b>	1173	1204
Sulfur	ppm	ASTM D5185m		<b>4128</b>	3286	4824
Visc @ 40°C	cSt	ASTM D445	57.0	<b>50.0</b>	52.9	52.9

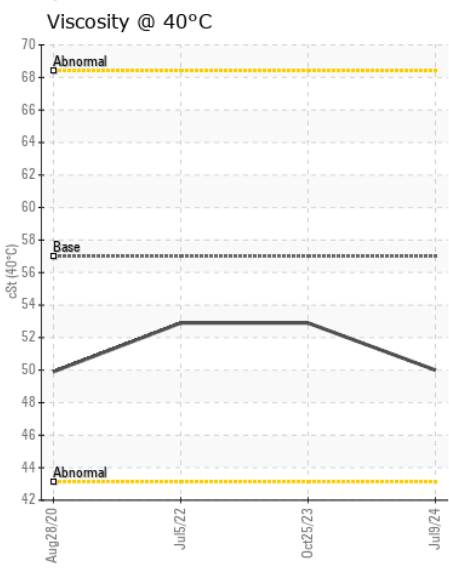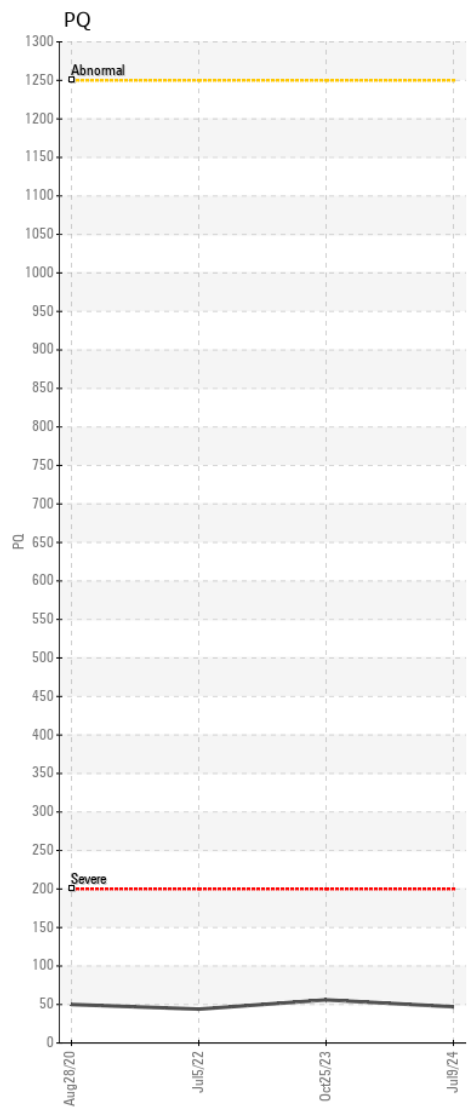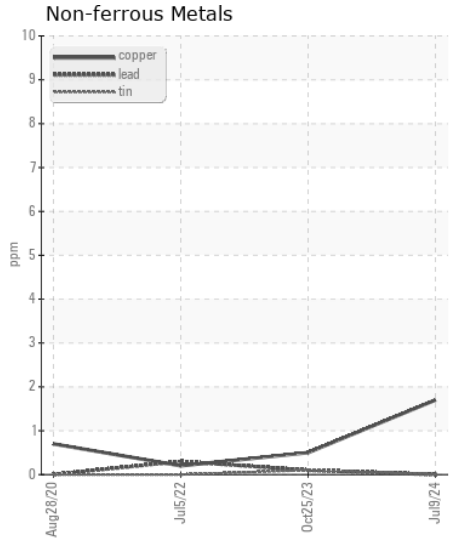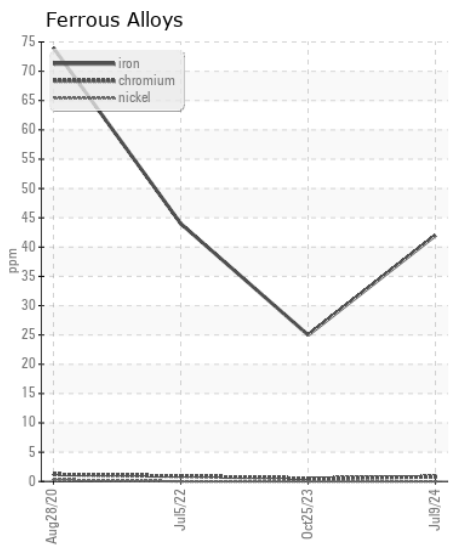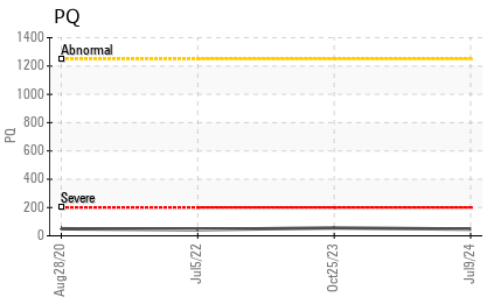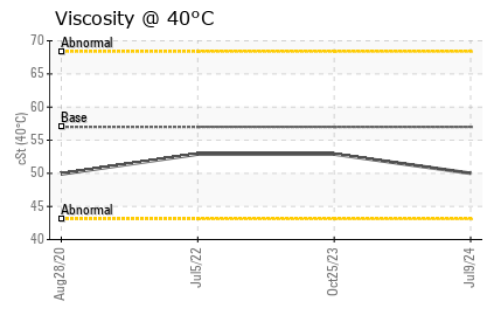

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218470 **Received** : 11 Jul 2024  
**Lab Number** : 06233504 **Tested** : 12 Jul 2024  
**Unique Number** : 11116997 **Diagnosed** : 12 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**R.J. SMITH**  
 1711 REYMET RD  
 RICHMOND, VA  
 US 23237  
 Contact: KIRBY MAITLAND

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (804)283-6426  
 F: (804)513-2148