



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[47720]
 Machine Id
JOHN DEERE 260E PM051775 (S/N 1DW260ETPJF688614)
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225688	JR0210289	JR0187760
Sample Date		Client Info		10 Jul 2024	08 Mar 2024	25 Sep 2023
Machine Age	hrs	Client Info		5970	5461	4956
Oil Age	hrs	Client Info		4538	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Not Changd
Filter Changed		Client Info		Changed	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		230	232	115
Iron	ppm	ASTM D5185m	>500	630	481	321
Chromium	ppm	ASTM D5185m	>10	2	2	<1
Nickel	ppm	ASTM D5185m	>10	2	2	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	5
Lead	ppm	ASTM D5185m	>25	<1	<1	<1
Copper	ppm	ASTM D5185m	>100	208	134	96
Tin	ppm	ASTM D5185m	>10	7	6	5
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	10	10
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	1
Boron	ppm	ASTM D5185m	6	11	8	9
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	3	3	1
Manganese	ppm	ASTM D5185m		6	5	4
Magnesium	ppm	ASTM D5185m	145	95	88	97
Calcium	ppm	ASTM D5185m	3570	3612	3131	3381
Phosphorus	ppm	ASTM D5185m	1290	1023	920	1012
Zinc	ppm	ASTM D5185m	1640	1280	1138	1268
Sulfur	ppm	ASTM D5185m		3433	3333	3649
Visc @ 40°C	cSt	ASTM D445	57.0	50.1	52.1	52.6

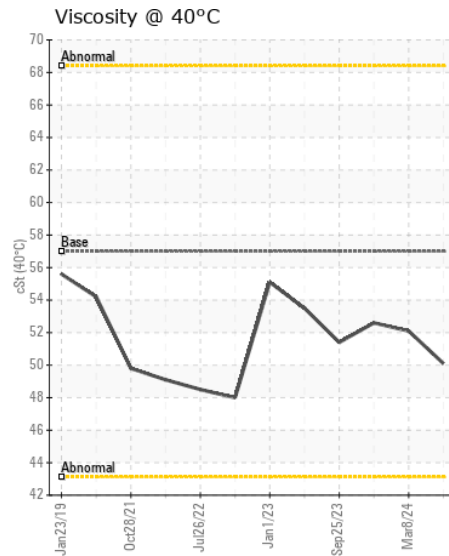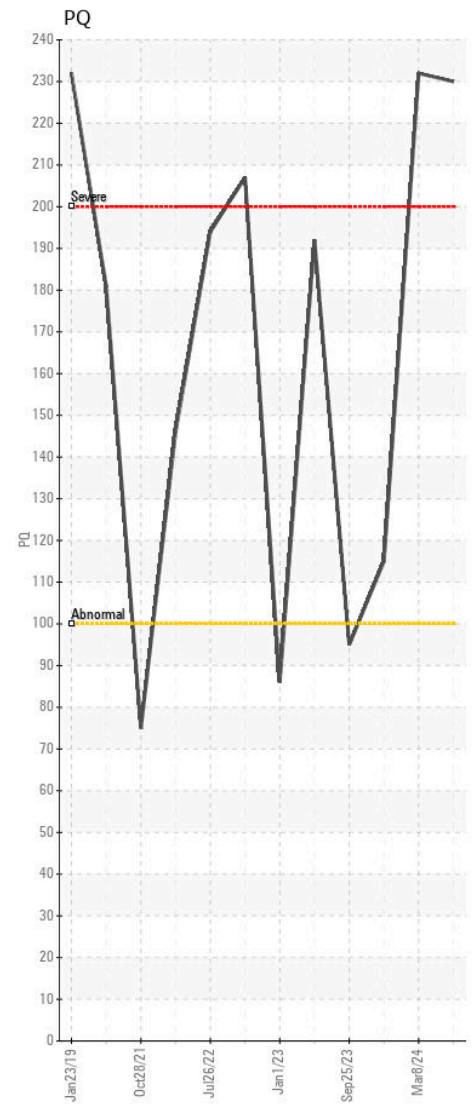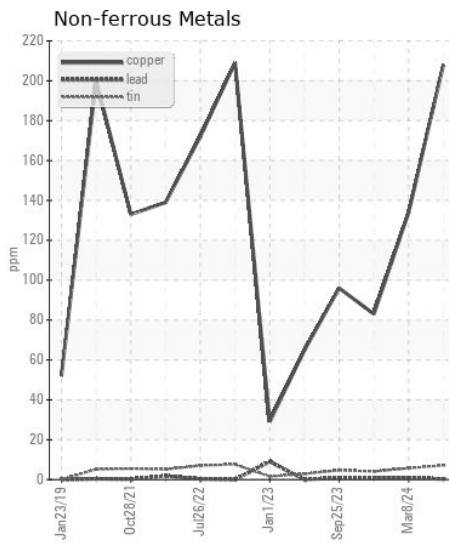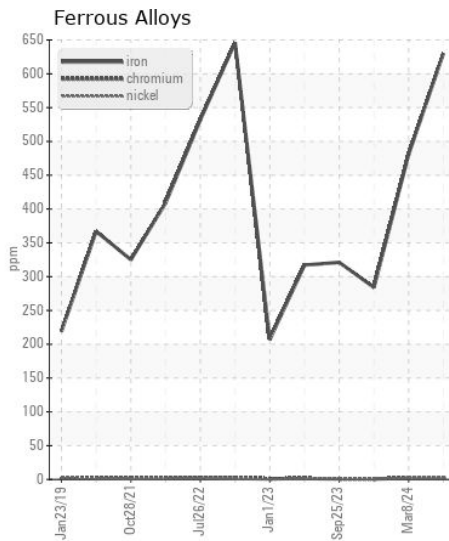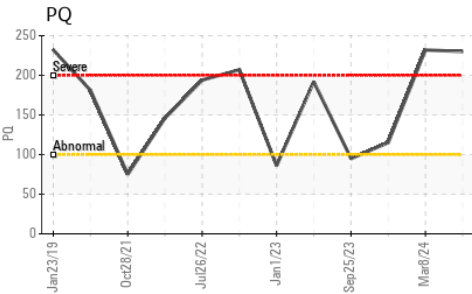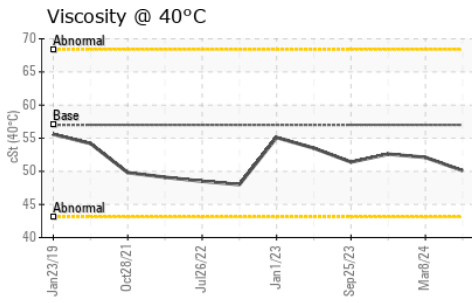

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225688 **Received** : 11 Jul 2024
Lab Number : 06233508 **Tested** : 12 Jul 2024
Unique Number : 11117001 **Diagnosed** : 13 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

HERITAGE SITE DEVELOPMENT
 26 CATTLEMANS DR
 BERRYVILLE, VA
 US 20134
 Contact: SERVICE MANAGER
 dieselpro44@yahoo.com
 T: (540)327-2857
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)