



WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
NORMAL

Area

[47857]

Machine Id

JOHN DEERE 850L 1T0850LXJPF445777

Component

Right Outer Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225460	JR0211299	JR0195975
Sample Date		Client Info		10 Jul 2024	11 Apr 2024	04 Dec 2023
Machine Age	hrs	Client Info		1978	1494	972
Oil Age	hrs	Client Info		1456	522	972
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	None
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	243	107	48
Iron	ppm	ASTM D5185m	>750	402	123	94
Chromium	ppm	ASTM D5185m	>9	2	<1	<1
Nickel	ppm	ASTM D5185m	>10	3	<1	<1
Titanium	ppm	ASTM D5185m		6	1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	72	15	5
Lead	ppm	ASTM D5185m	>15	0	0	<1
Copper	ppm	ASTM D5185m	>40	2	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	215	55	13
Potassium	ppm	ASTM D5185m	>20	12	3	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	7	2	2
Boron	ppm	ASTM D5185m	6	8	5	1
Barium	ppm	ASTM D5185m	0	0	<1	4
Molybdenum	ppm	ASTM D5185m	0	5	4	0
Manganese	ppm	ASTM D5185m		4	1	2
Magnesium	ppm	ASTM D5185m	145	129	107	107
Calcium	ppm	ASTM D5185m	3570	3505	3086	3337
Phosphorus	ppm	ASTM D5185m	1290	999	908	1064
Zinc	ppm	ASTM D5185m	1640	1223	1057	1291
Sulfur	ppm	ASTM D5185m		4192	3796	3811
Visc @ 40°C	cSt	ASTM D445	57.0	54.0	54.6	53.7

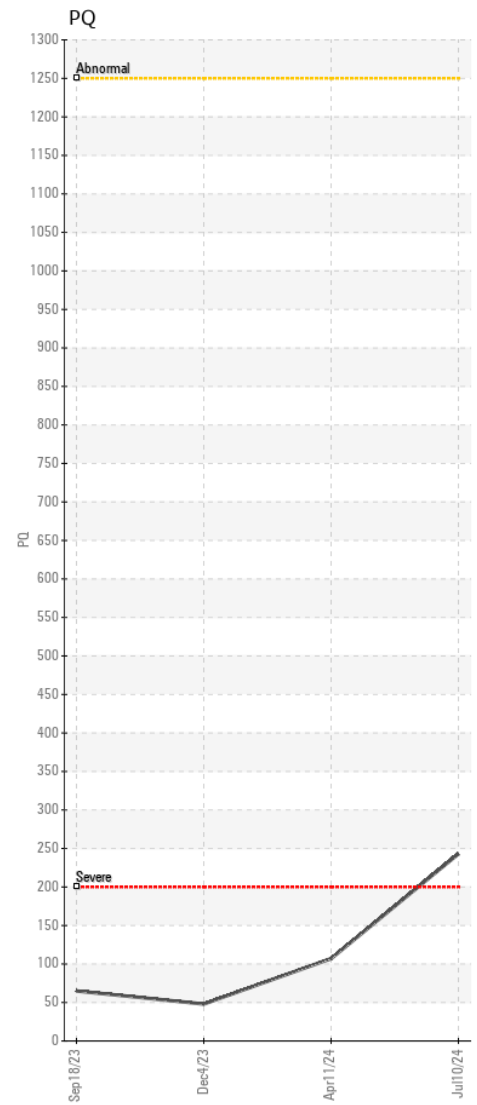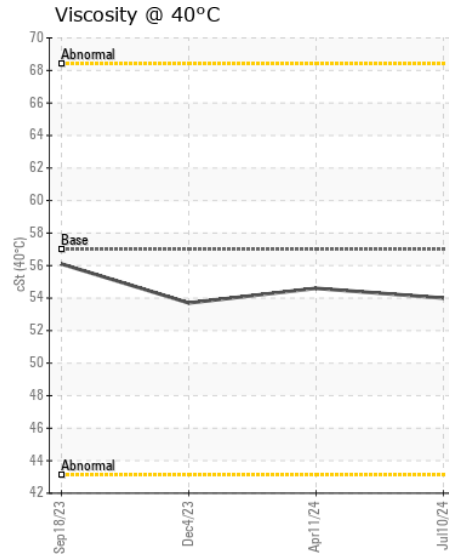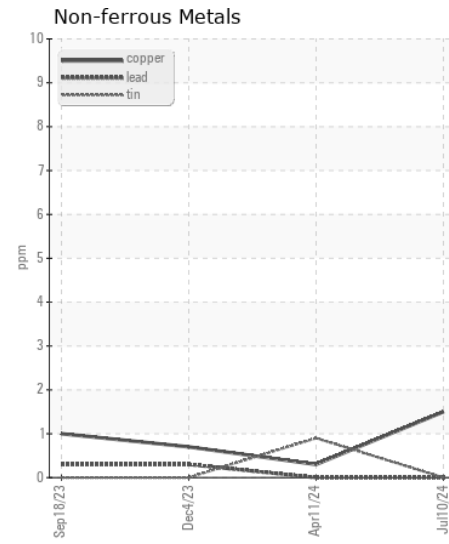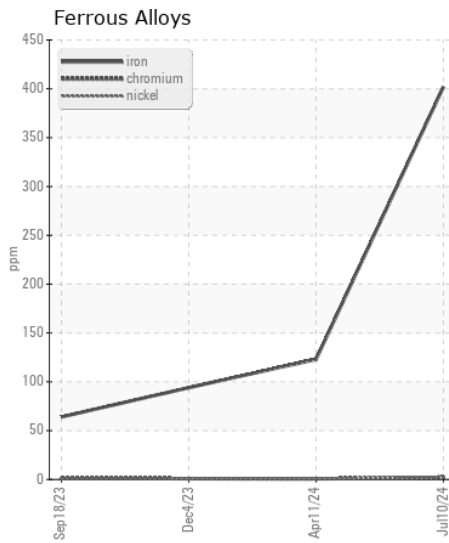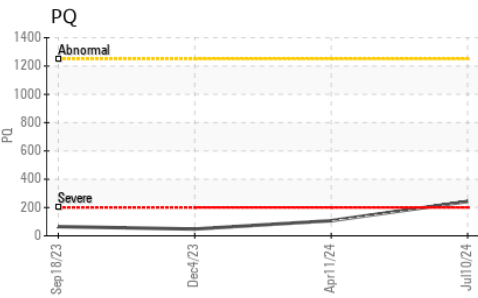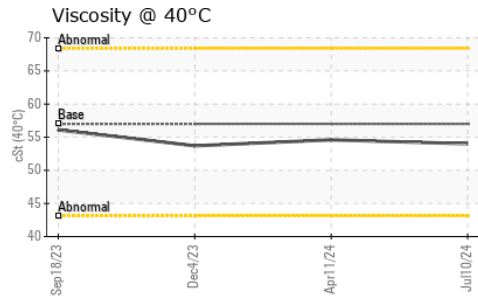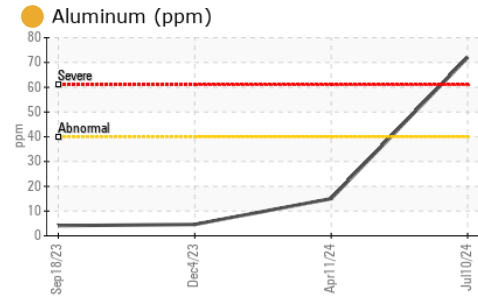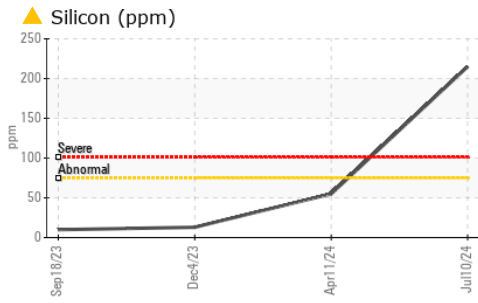

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0225460 **Received** : 11 Jul 2024
Lab Number : 06233532 **Tested** : 12 Jul 2024
Unique Number : 11117025 **Diagnosed** : 13 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)