



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 848L 1DW848LBANF713291**  
 Component  
**Brake**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (1 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0221101</b>	JR0201251	JR0182472
Sample Date		Client Info		<b>09 Jul 2024</b>	26 Feb 2024	08 Sep 2023
Machine Age	hrs	Client Info		<b>2494</b>	2009	1537
Oil Age	hrs	Client Info		<b>485</b>	1850	159
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	MARGINAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>27</b>	50	---
Iron	ppm	ASTM D5185m	>350	<b>102</b>	176	144
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	3	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>8	<b>2</b>	2	5
Lead	ppm	ASTM D5185m	>10	<b>2</b>	4	4
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	<b>372</b>	▲ 575	248
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	1	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	0.2%	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>11</b>	19	20
Boron	ppm	ASTM D5185m	6	<b>23</b>	35	39
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>40</b>	102	109
Manganese	ppm	ASTM D5185m		<b>1</b>	2	2
Magnesium	ppm	ASTM D5185m	145	<b>135</b>	205	222
Calcium	ppm	ASTM D5185m	3570	<b>3421</b>	2775	2766
Phosphorus	ppm	ASTM D5185m	1290	<b>1027</b>	896	913
Zinc	ppm	ASTM D5185m	1640	<b>1209</b>	1002	1096
Sulfur	ppm	ASTM D5185m		<b>3610</b>	2965	3657
Visc @ 40°C	cSt	ASTM D445	57.0	<b>50.2</b>	50.1	---

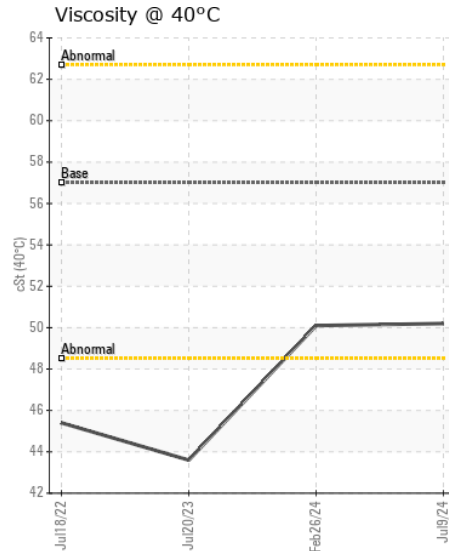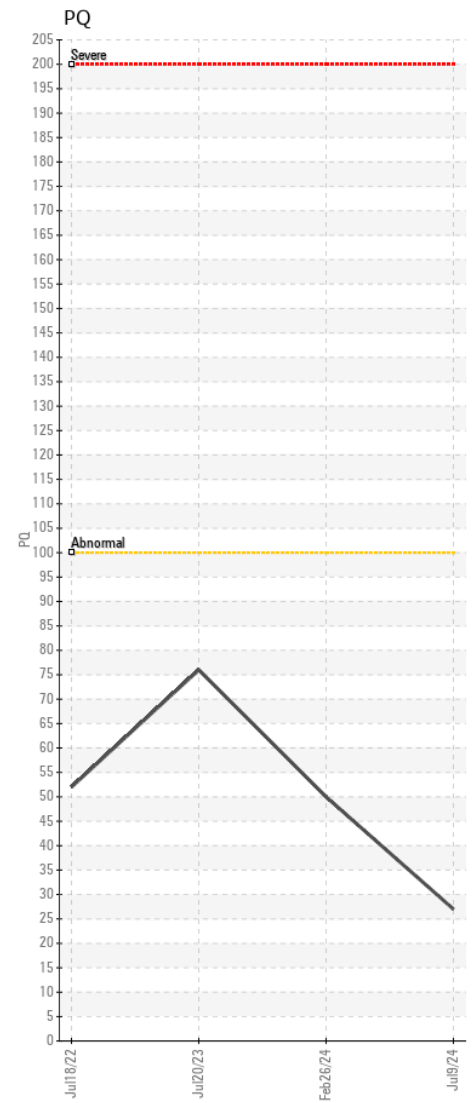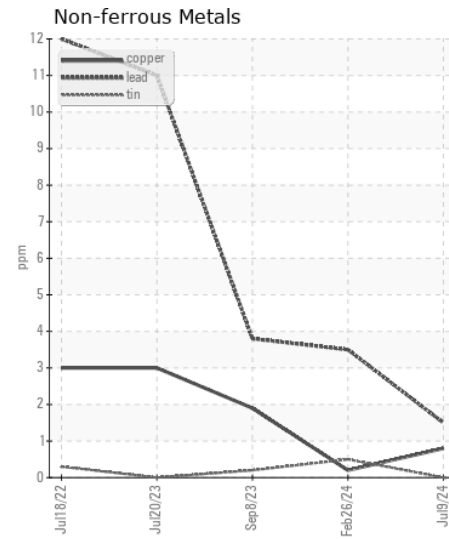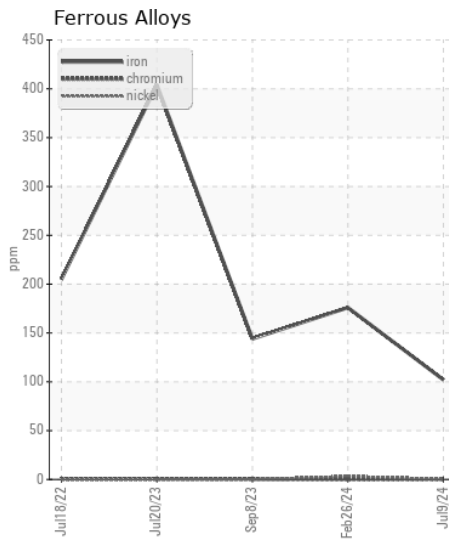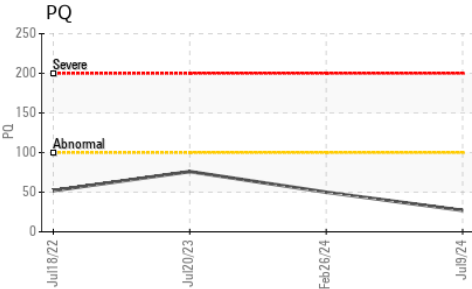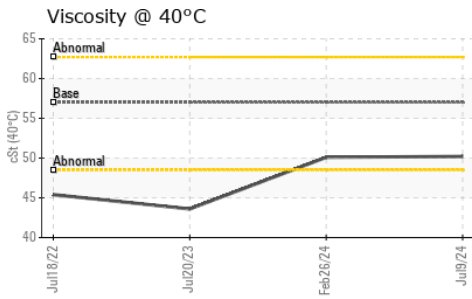

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0221101 **Received** : 11 Jul 2024  
**Lab Number** : 06233539 **Tested** : 12 Jul 2024  
**Unique Number** : 11117032 **Diagnosed** : 13 Jul 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP  
 nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: