



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC550E 550E310264
Component
Right Travel
Fluid
GEAR OIL SAE 80W140 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008316	ASC0007662	---
Sample Date		Client Info		09 Jul 2024	23 Feb 2024	---
Machine Age	hrs	Client Info		941	488	---
Oil Age	hrs	Client Info		453	488	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	393	420	---
Chromium	ppm	ASTM D5185m	>20	4	5	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>100	2	1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>50	<1	0	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	6	7	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.25	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	---
Boron	ppm	ASTM D5185m	400	100	0	---
Barium	ppm	ASTM D5185m	200	0	4	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		4	6	---
Magnesium	ppm	ASTM D5185m	12	<1	2	---
Calcium	ppm	ASTM D5185m	150	6	13	---
Phosphorus	ppm	ASTM D5185m	1650	765	279	---
Zinc	ppm	ASTM D5185m	125	7	<1	---
Sulfur	ppm	ASTM D5185m	22500	26040	14926	---
Visc @ 40°C	cSt	ASTM D445	263	250	178	---

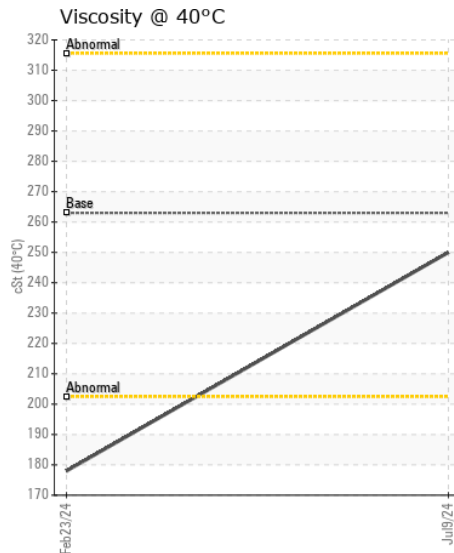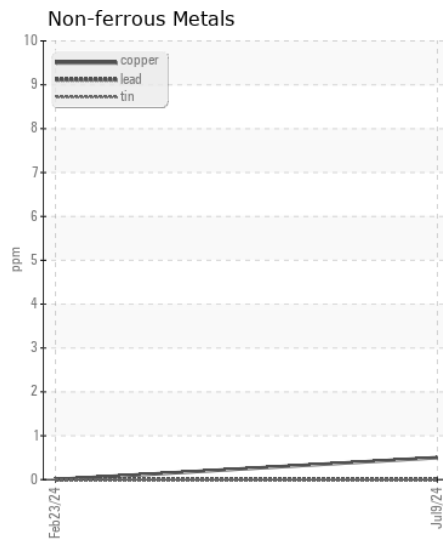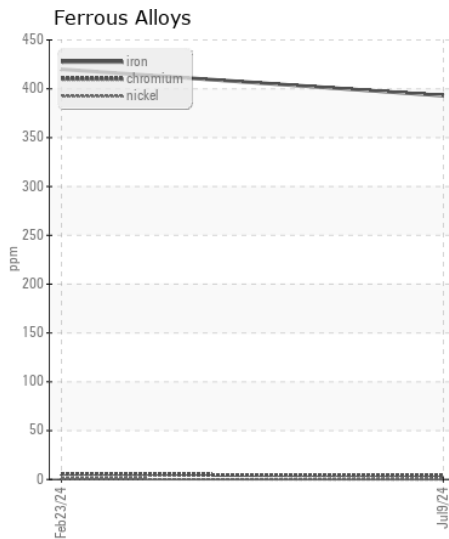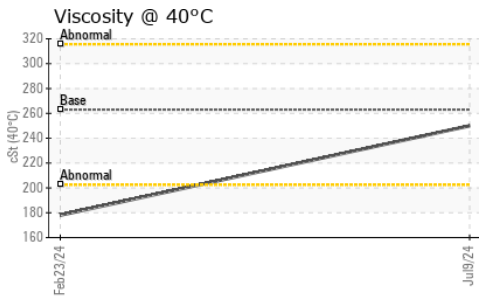

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0008316

Lab Number : 06233636

Unique Number : 11117129

Test Package : CONST

Received : 11 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 13 Jul 2024 - Don Baldrige

PARAGON SITE SOLUTIONS LLC

665 SEWARD AVE NW #301

CHARLOTTE, NC

US 28273

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: