



OIL ANALYSIS REPORT

| | |
|-----------------|----------|
| WEAR | NORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
E-ONE LADDER 39
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | WC0947538 | --- | --- |
| Sample Date | | Client Info | | 27 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Not Changd | --- | --- |
| Filter Changed | | Client Info | | Not Changd | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >20 | 5 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 8 | --- | --- |
| Lead | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >75 | 8 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION






Moderate concentration of visible dirt/debris present in the oil. There is a light concentration of water present in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|---------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Water | % | ASTM D6304 | >0.1 | ▲ 0.170 | --- | --- |
| ppm Water | ppm | ASTM D6304 | >1000 | ▲ 1700 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | ▲ MODER | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | 0.2% | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 4 | --- | --- |
| Boron | ppm | ASTM D5185m | 5 | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | 5 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 5 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 25 | 9 | --- | --- |
| Calcium | ppm | ASTM D5185m | 200 | 90 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 300 | 349 | --- | --- |
| Zinc | ppm | ASTM D5185m | 370 | 425 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 2500 | 1580 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 32 | 30.5 | --- | --- |

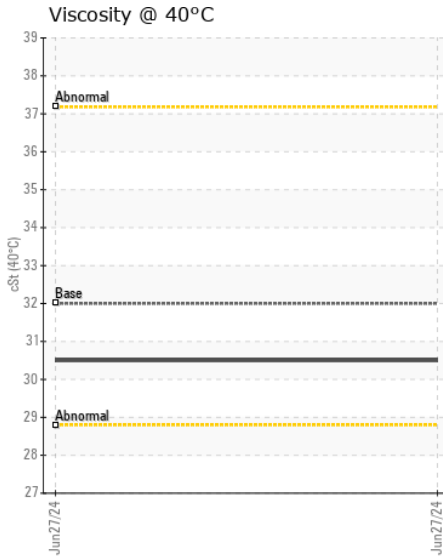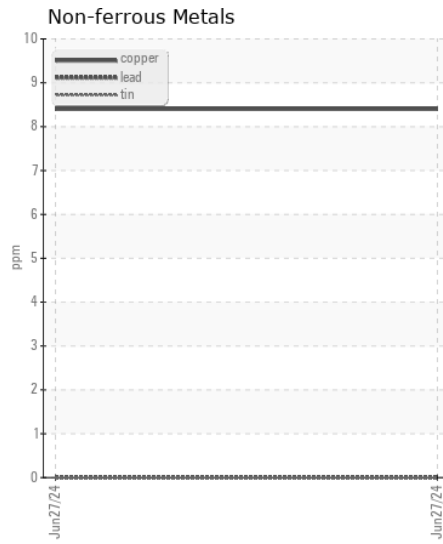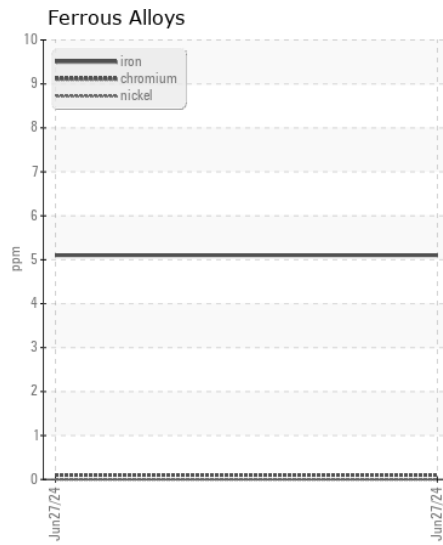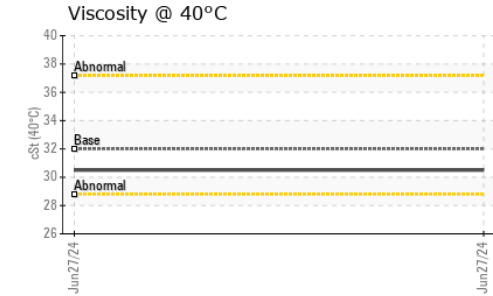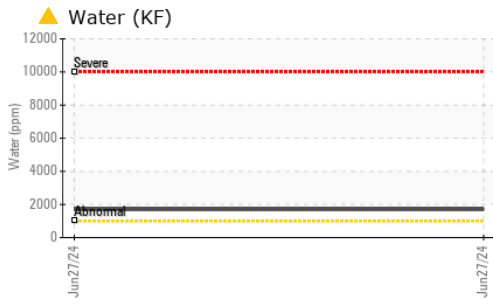

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947538 **Received** : 11 Jul 2024
Lab Number : 06233685 **Tested** : 12 Jul 2024
Unique Number : 11117178 **Diagnosed** : 13 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAMANCHE FIRE DEPT
 720 9TH AVE
 CAMANCHE, IA
 US 52730

Contact: CHIEF SCHUTTE
 camanchefire@yahoo.com

T: (563)259-1112

F: