

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL

Machine Id


24G0106 GL-135 Component New (Unused) Oil


NOT GIVEN (--- GAL)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
This is a baseline read-out on the submitted sample.	Sample Number		Client Info		HPL0005562		
	Sample Date		Client Info		02 Jul 2024		
	Machine Age	hrs	Client Info		0		
	Oil Age	hrs	Client Info		0		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		Not Changd		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
WEAR	Iron	nnm	ASTM D5185m		0		
	Chromium	ppm ppm	ASTM D5185m		0		
	Nickel		ASTM D5185m		0		
	Titanium	ppm ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m		<1		
	Lead	ppm	ASTM D5185m		0		
	Copper	ppm	ASTM D5185m		0		
	Tin	ppm	ASTM D5185m		0		
	Vanadium	ppm	ASTM D5185m		0		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
CONTAMINATION	Silicon	ppm	ASTM D5185m		<1		
	Potassium	ppm	ASTM D5185m	>20	0		
	Water		WC Method		NEG		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual		NEG		
FLUID CONDITION	Sodium	ppm	ASTM D5185m		<1		
	Boron	ppm	ASTM D5185m		0		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		0		
	Manganese	ppm	ASTM D5185m		0		
	Magnesium	ppm	ASTM D5185m		<1		
	Calcium	ppm	ASTM D5185m		5		
	Phosphorus	ppm	ASTM D5185m		190		
	Zinc	ppm	ASTM D5185m		<1		
	Sulfur	ppm	ASTM D5185m		25233		
	Acid Number (AN)	mg KOH/g			0.78		
	Visc @ 40°C	cSt	ASTM D445		718.7		
	Visc @ 100°C	cSt	ASTM D445		48.58		
	Allerer the Later Alle	0	A OTH DOOTO		447		

Viscosity Index (VI) Scale ASTM D2270

117

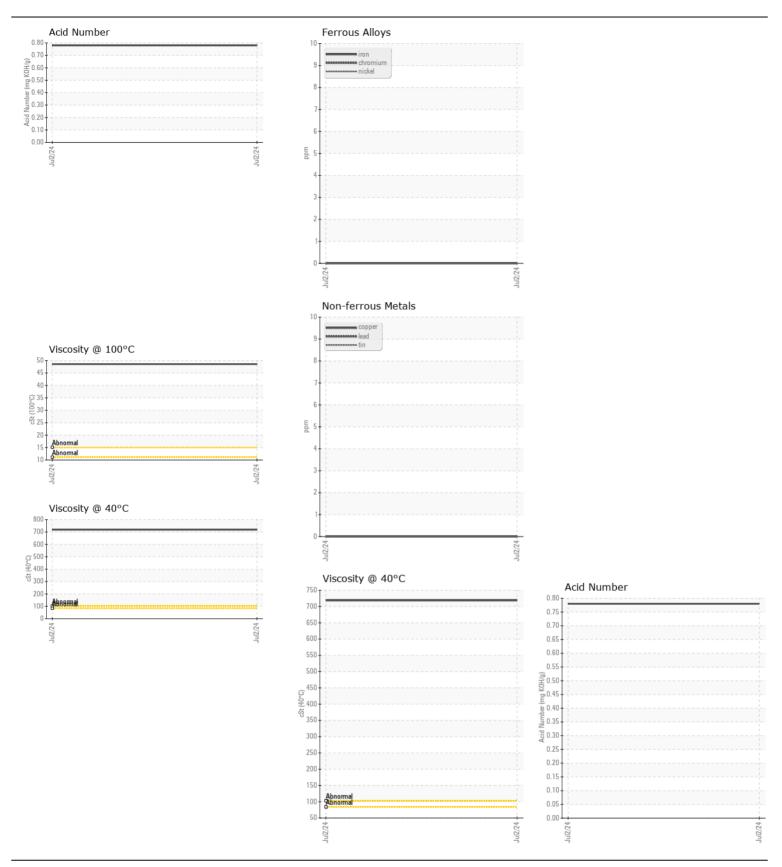



Submitted By: DAVID WARD Page 2 of 2