



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
JOHN DEERE 350G 1FF350GXCDE809671
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)

RECOMMENDATION

Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224506	JR0164856	JR0147739
Sample Date		Client Info		09 Jul 2024	25 Apr 2023	02 Nov 2022
Machine Age	hrs	Client Info		9452	8987	8461
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	18	13	9
Iron	ppm	ASTM D5185m	>32	11	14	12
Chromium	ppm	ASTM D5185m	>9	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	3	3
Lead	ppm	ASTM D5185m	>28	0	0	0
Copper	ppm	ASTM D5185m	>50	6	14	11
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION














The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	3	4	3
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	52755	33897	35637
Particles >6µm		ASTM D7647	>20000	5013	3007	1900
Particles >14µm		ASTM D7647	>640	15	24	28
Particles >21µm		ASTM D7647	>160	2	4	7
Particles >38µm		ASTM D7647	>40	0	1	1
Particles >71µm		ASTM D7647	>10	0	1	1
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/20/11	22/19/12	22/18/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

Zinc level above manufacturer's recommendations. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m	>21	<1	0	<1
Boron	ppm	ASTM D5185m		1	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	2	2
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		12	9	5
Calcium	ppm	ASTM D5185m		51	47	35
Phosphorus	ppm	ASTM D5185m	827	471	572	485
Zinc	ppm	ASTM D5185m	0	▲ 211	▲ 136	▲ 89
Sulfur	ppm	ASTM D5185m	13	713	360	81
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.23	0.22	0.24
Visc @ 40°C	cSt	ASTM D445	47	43.2	45.1	46.3

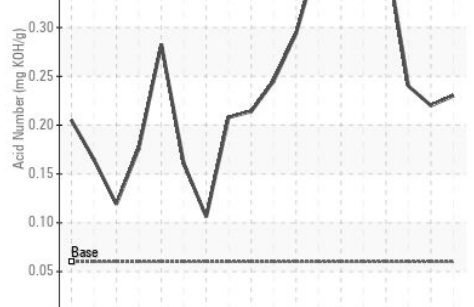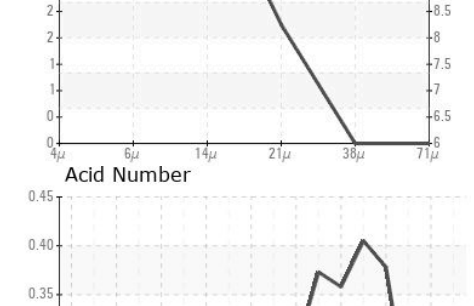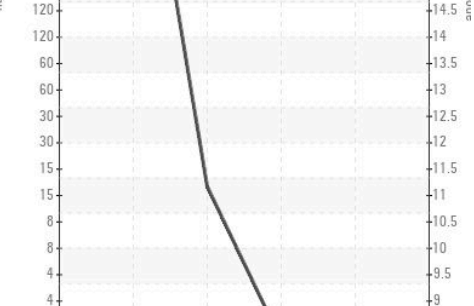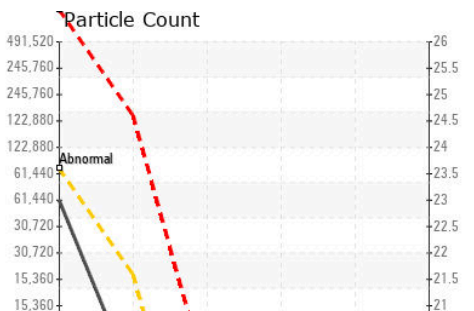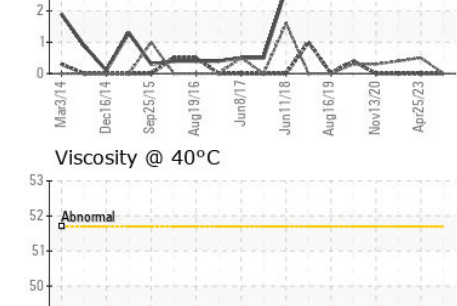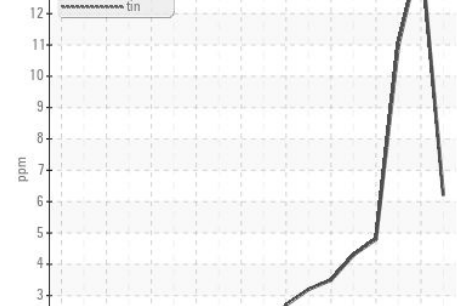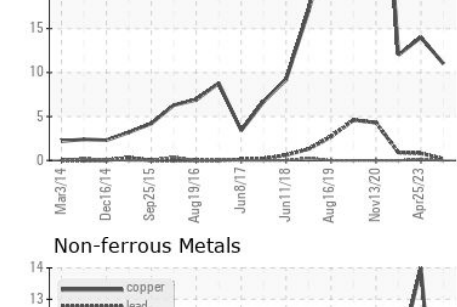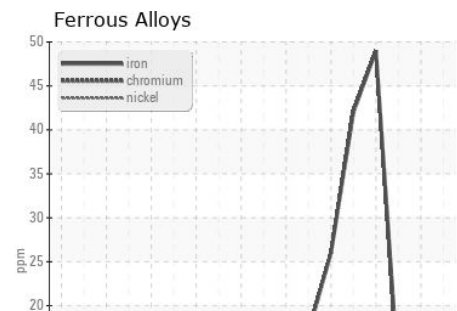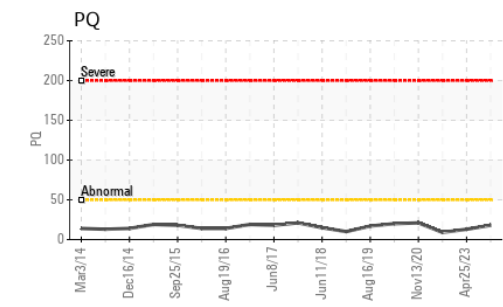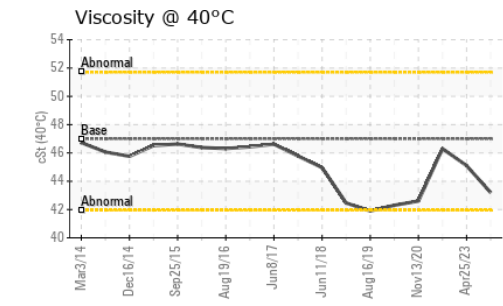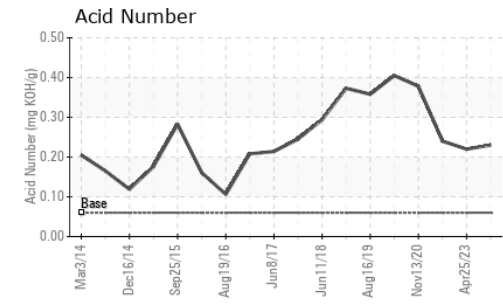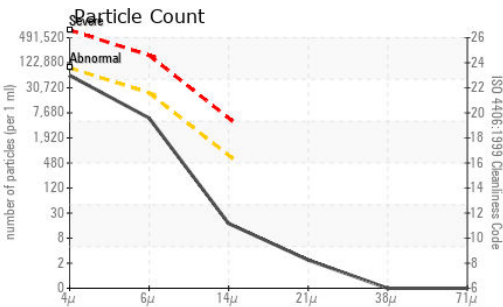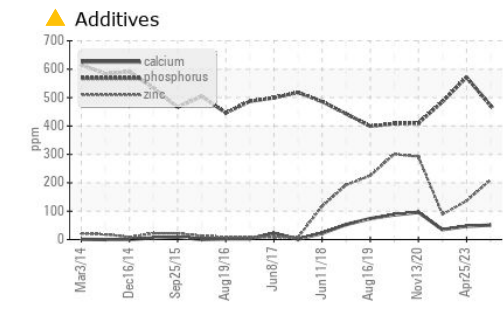

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0224506 **Received** : 11 Jul 2024
Lab Number : 06233796 **Tested** : 12 Jul 2024
Unique Number : 11122630 **Diagnosed** : 13 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)