



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
PRO
Machine Id
Component
PRO
Steering
Fluid
CHEVRON HYDRAULIC AW ISO 68 (100 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0065185	MW0065198	MW0054640
Sample Date		Client Info		28 Jun 2024	28 Mar 2024	28 Dec 2023
Machine Age	hrs	Client Info		0	15986	0
Oil Age	hrs	Client Info		18144	15986	13914
Filter Age	hrs	Client Info		18144	0	13914
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	2	0
Chromium	ppm	ASTM D5185m	>15	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	0	2	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	8	6
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647		46273	44147	61364
Particles >6µm		ASTM D7647	>1300	▲ 10050	▲ 4035	▲ 8771
Particles >14µm		ASTM D7647	>160	● 169	43	145
Particles >21µm		ASTM D7647	>40	20	6	26
Particles >38µm		ASTM D7647	>10	1	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/17/14	▲ 23/21/15	▲ 23/19/13	▲ 23/20/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		1	<1	0
Calcium	ppm	ASTM D5185m		49	52	47
Phosphorus	ppm	ASTM D5185m		364	300	331
Zinc	ppm	ASTM D5185m		456	398	414
Sulfur	ppm	ASTM D5185m		991	751	755
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	0.33	0.33
Visc @ 40°C	cSt	ASTM D445	64.6	67.1	67.0	67.5

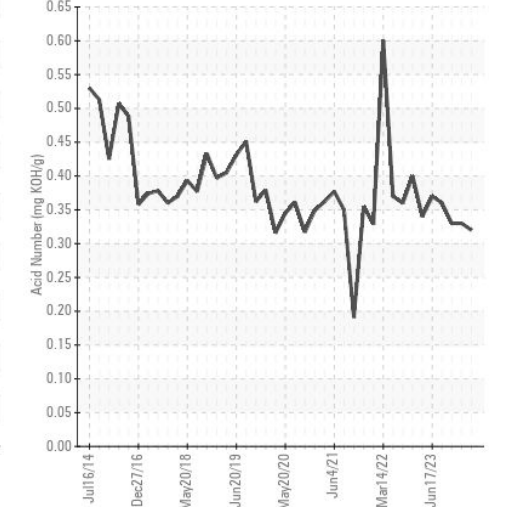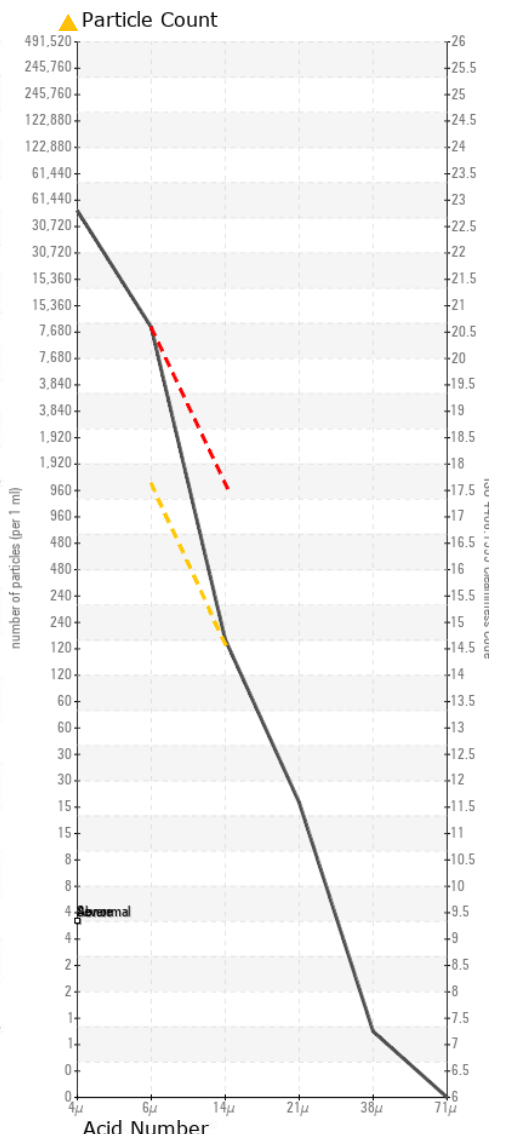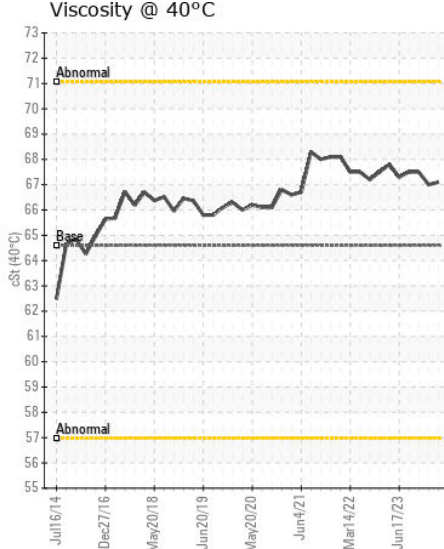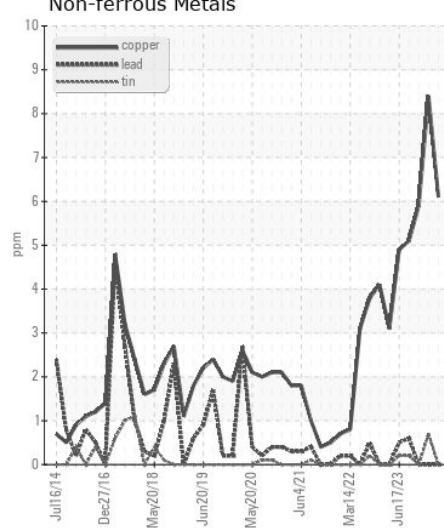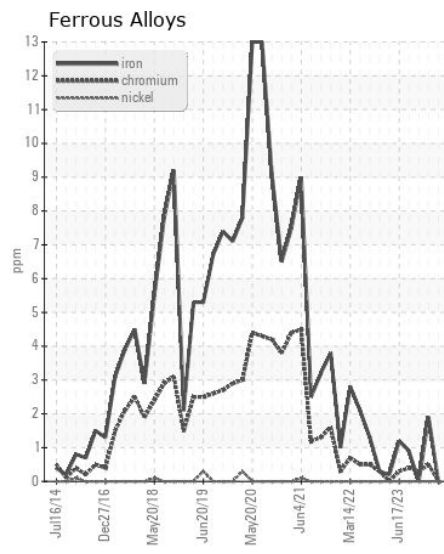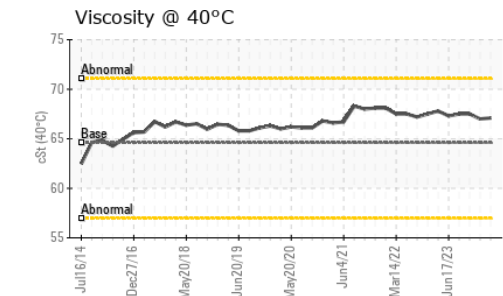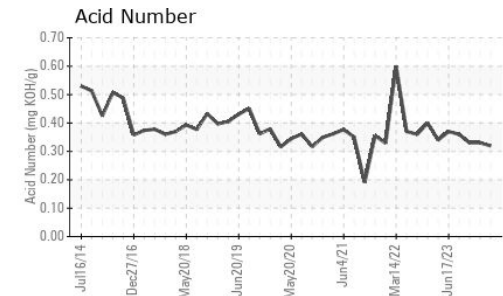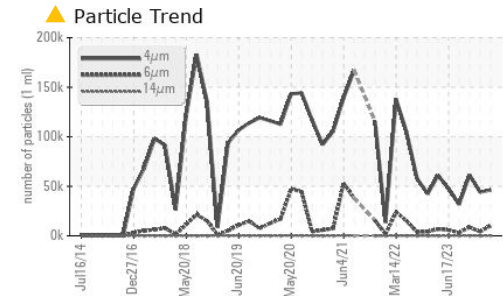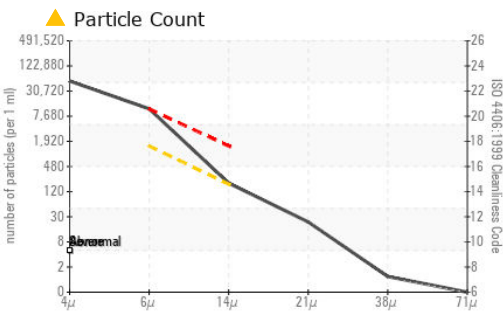

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0065185 **Received** : 11 Jul 2024
Lab Number : 06233820 **Tested** : 12 Jul 2024
Unique Number : 11122654 **Diagnosed** : 13 Jul 2024 - Don Baldridge
Test Package : MAR 2 (Additional Tests: PrtCount)

AMERICAN RIVER TRANSPORTATION CO.
 P.O. BOX 2889
 ST. LOUIS, MO
 US 63111
 Contact: BRIAN GRIEWING
 brian.griewing@adm.com
 T:
 F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)