



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**OH INGRAM**  
Machine Id  
[OH INGRAM] 005 645896-5  
Component  
Center Reduction Gear  
Fluid  
CHEVRON MEROPA 320 (--- GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0063329</b>	MW0063311	MW0064800
Sample Date		Client Info		<b>01 Jul 2024</b>	01 May 2024	01 Feb 2024
Machine Age	hrs	Client Info		<b>60894</b>	59505	59173
Oil Age	hrs	Client Info		<b>30398</b>	59505	59173
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>74</b>	69	61
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>9</b>	9	9
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>50	<b>8</b>	6	7
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>19</b>	23	19
Boron	ppm	ASTM D5185m	20	<b>3</b>	8	3
Barium	ppm	ASTM D5185m		<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	0	<b>7</b>	8	6
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>3</b>	4	5
Calcium	ppm	ASTM D5185m	25	<b>19</b>	63	23
Phosphorus	ppm	ASTM D5185m	235	<b>261</b>	287	261
Zinc	ppm	ASTM D5185m		<b>22</b>	34	19
Sulfur	ppm	ASTM D5185m		<b>5855</b>	7680	5836
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.47</b>	0.49	0.27
Visc @ 40°C	cSt	ASTM D445	304	<b>317</b>	322	312

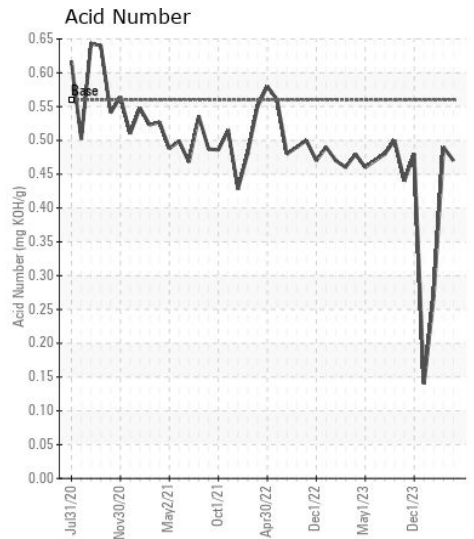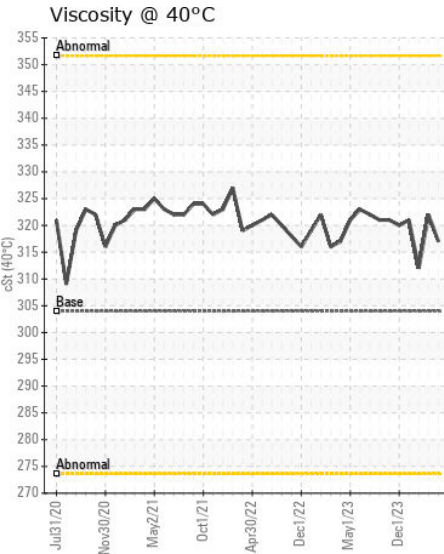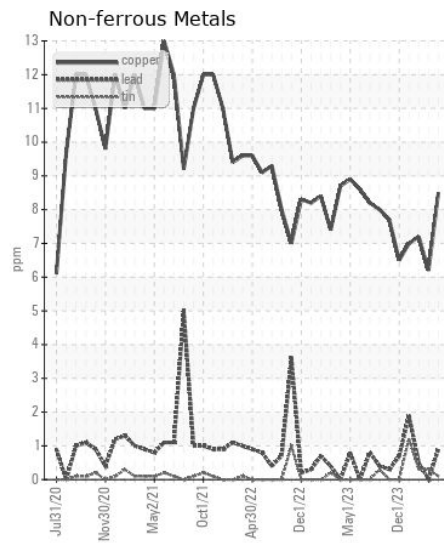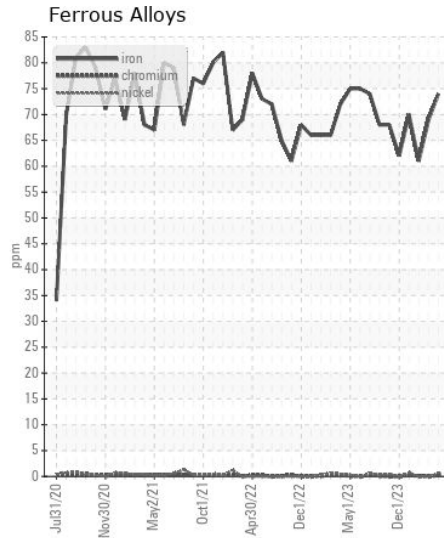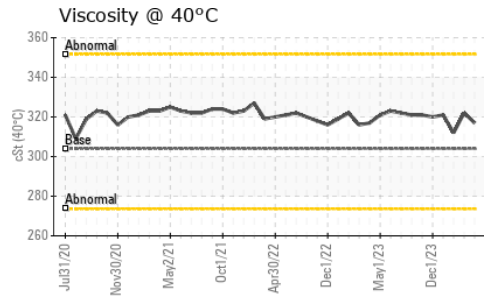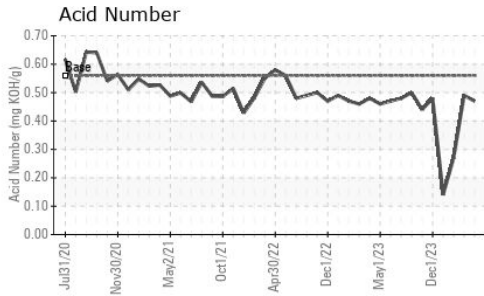

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0063329  
**Lab Number** : 06234000  
**Unique Number** : 11122834  
**Test Package** : MAR 2  
**Received** : 11 Jul 2024  
**Tested** : 12 Jul 2024  
**Diagnosed** : 12 Jul 2024 - Wes Davis

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: ALLEN WILLHELM  
 allen.willhelm@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)