



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**DAVID M OLAUGHLIN**  
Machine Id  
**[DAVID M OLAUGHLIN] 004 670547-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06234006</b>	MW06186366	MW0046534
Sample Date		Client Info		<b>01 Jul 2024</b>	01 May 2024	01 Dec 2023
Machine Age	hrs	Client Info		<b>43692</b>	42273	38629
Oil Age	hrs	Client Info		<b>6919</b>	42273	1857
Filter Age	hrs	Client Info		<b>0</b>	0	1857
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>23</b>	15	12
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m	>50	<b>2</b>	3	3
Tin	ppm	ASTM D5185m	>10	<b>0</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>&lt;1</b>	4	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	4
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	5	3
Boron	ppm	ASTM D5185m	20	<b>11</b>	4	13
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185m	25	<b>10</b>	20	20
Phosphorus	ppm	ASTM D5185m	235	<b>267</b>	156	315
Zinc	ppm	ASTM D5185m		<b>2</b>	0	6
Sulfur	ppm	ASTM D5185m		<b>5364</b>	3907	7222
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.61</b>	0.70	0.78
Visc @ 40°C	cSt	ASTM D445	304	<b>322</b>	322	322

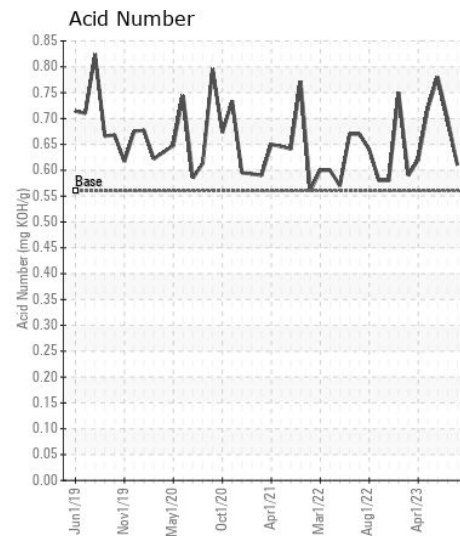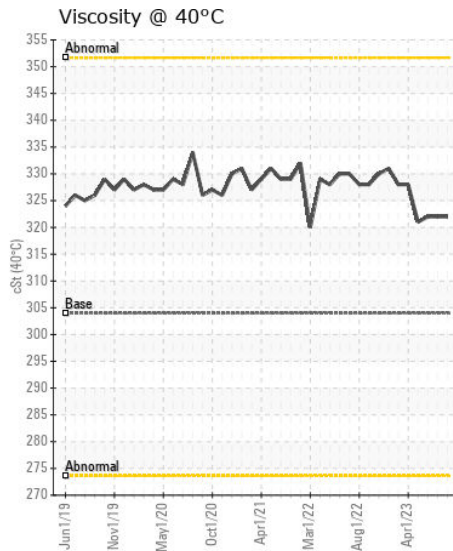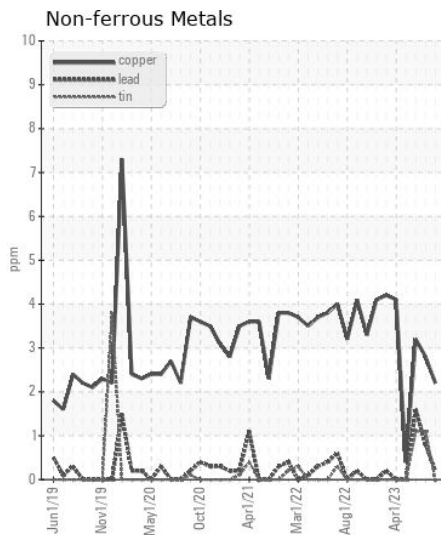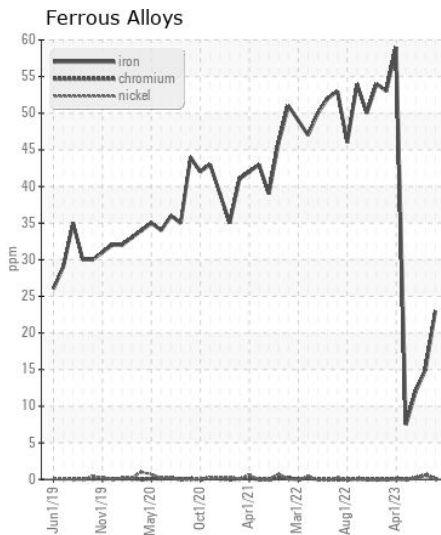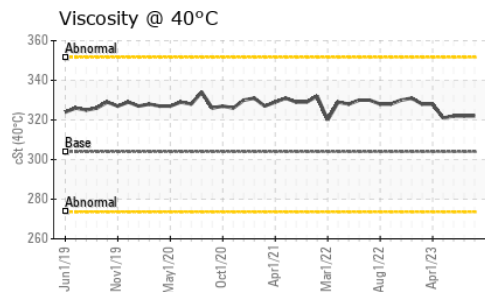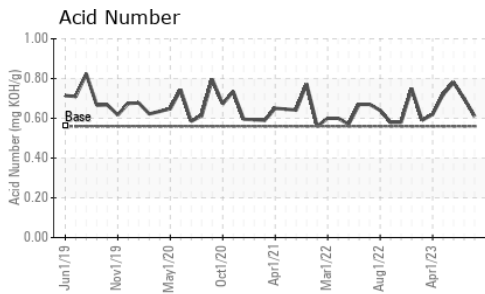

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW06234006

**Lab Number** : 06234006

**Unique Number** : 11122840

**Test Package** : MAR 2

**Received** : 11 Jul 2024

**Tested** : 12 Jul 2024

**Diagnosed** : 12 Jul 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: GLENN ELLIS

glen.ellis@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)