



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
PB SHAH
Machine Id
[PB SHAH] 001 566553-1
Component
Port Main Engine
Fluid
CHEVRON DELO 710 LE (320 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0066055 | MW0066117 | MW0065981 |
| Sample Date | | Client Info | | 01 Jul 2024 | 01 Jun 2024 | 02 May 2024 |
| Machine Age | hrs | Client Info | | 2074 | 1370 | 792 |
| Oil Age | hrs | Client Info | | 2074 | 1370 | 792 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 20 | 23 | 22 |
| Chromium | ppm | ASTM D5185m | >8 | 2 | 2 | 2 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | 2 | 3 |
| Lead | ppm | ASTM D5185m | >18 | 5 | 8 | 9 |
| Copper | ppm | ASTM D5185m | >80 | 12 | 13 | 16 |
| Tin | ppm | ASTM D5185m | >14 | 8 | 10 | 9 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 5 | 7 | 9 |
| Potassium | ppm | ASTM D5185m | >20 | 3 | 2 | 4 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.5 | 0.4 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.8 | 7.8 | 7.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 15.8 | 15.5 | 15.2 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | 5 | 6 | 11 |
| Boron | ppm | ASTM D5185m | | 41 | 39 | 49 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 46 | 47 | 45 |
| Manganese | ppm | ASTM D5185m | | 2 | 2 | 2 |
| Magnesium | ppm | ASTM D5185m | | 13 | 11 | 11 |
| Calcium | ppm | ASTM D5185m | | 3521 | 3914 | 3419 |
| Phosphorus | ppm | ASTM D5185m | | 34 | 7 | 11 |
| Zinc | ppm | ASTM D5185m | 10 | 29 | 3 | 6 |
| Sulfur | ppm | ASTM D5185m | | 2339 | 2893 | 2765 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 8.2 | 8.3 | 7.6 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.2 | 9.15 | 8.45 | 9.59 |
| Visc @ 100°C | cSt | ASTM D445 | 15.5 | 14.9 | 14.7 | 14.4 |


FT-IR (Direct Trend)

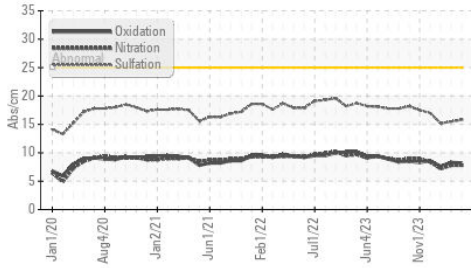


Base Number

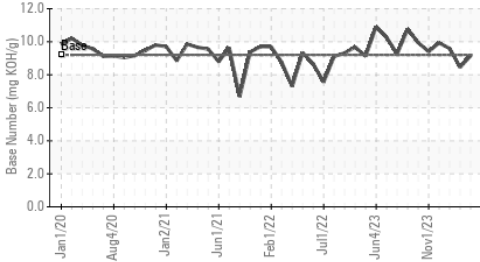


Viscosity @ 100°C

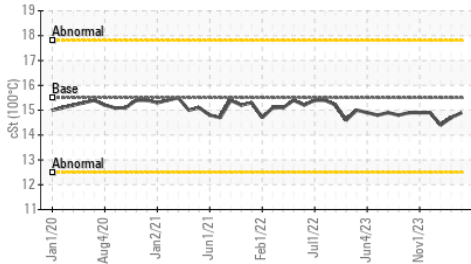


Ferrous Alloys

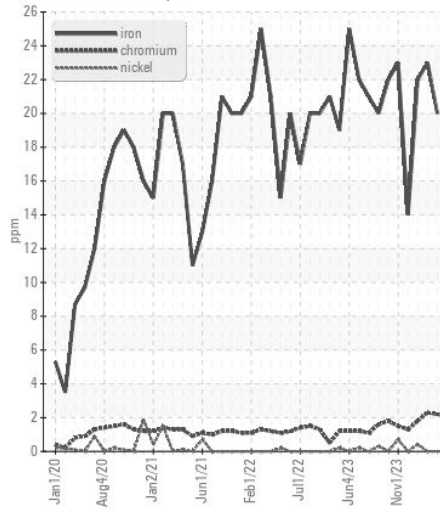


Non-ferrous Metals

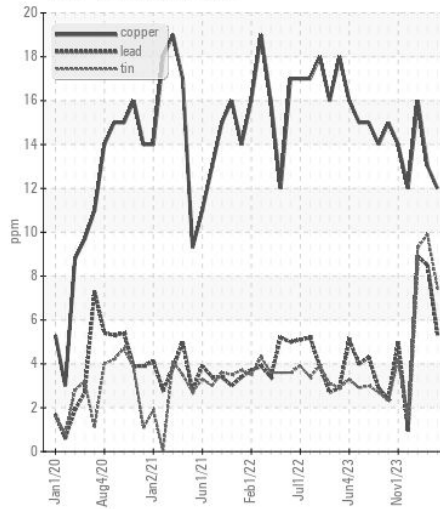

Viscosity @ 100°C

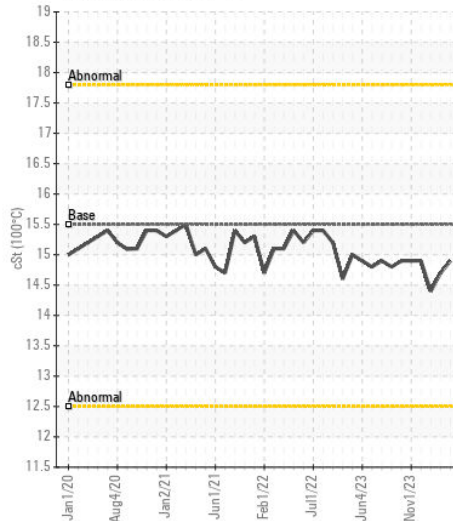

Base Number

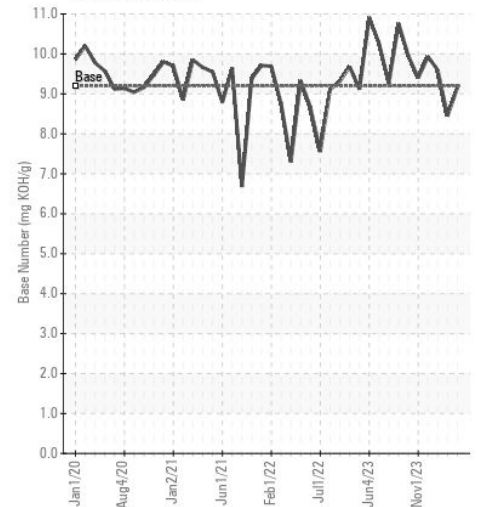

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0066055
Lab Number : 06234029
Unique Number : 11122863
Test Package : MAR 2
Received : 11 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 14 Jul 2024 - Don Baldrige

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: ANTHONY VAN CURA
 anthony.vancura@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)