



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JOHN M DONNELLY
Machine Id
[**JOHN M DONNELLY**] 003 621298-3
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LS (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0071057	MW0061248	MW0061219
Sample Date		Client Info		01 Jul 2024	01 Apr 2024	21 Mar 2024
Machine Age	hrs	Client Info		11921	10100	9839
Oil Age	hrs	Client Info		11921	10100	9839
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	11	9	12
Chromium	ppm	ASTM D5185m	>8	1	2	2
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	3
Lead	ppm	ASTM D5185m	>18	6	6	5
Copper	ppm	ASTM D5185m	>80	13	13	13
Tin	ppm	ASTM D5185m	>14	5	6	7
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	5	6
Potassium	ppm	ASTM D5185m	>20	3	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.5	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.9	16.9	17.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	9	10	13
Boron	ppm	ASTM D5185m		38	45	44
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		47	52	49
Manganese	ppm	ASTM D5185m		2	2	2
Magnesium	ppm	ASTM D5185m		11	11	10
Calcium	ppm	ASTM D5185m		3573	3886	3577
Phosphorus	ppm	ASTM D5185m		13	9	6
Zinc	ppm	ASTM D5185m		4	0	<1
Sulfur	ppm	ASTM D5185m		2259	2777	2492
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.2	8.9	8.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	8.82	9.10	8.84
Visc @ 100°C	cSt	ASTM D445	15.5	14.9	14.9	15.0


FT-IR (Direct Trend)

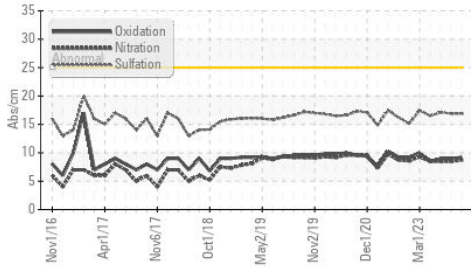


Base Number

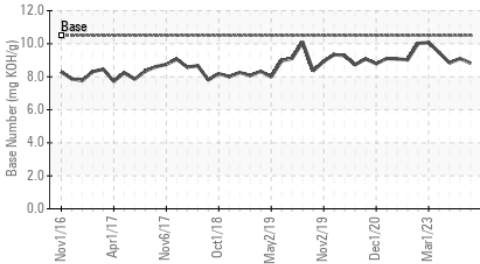


Viscosity @ 100°C

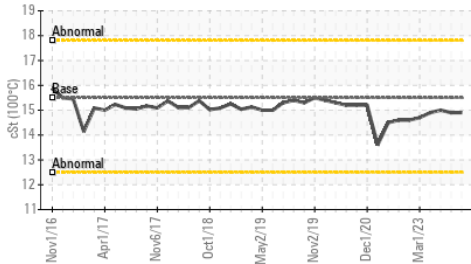


Ferrous Alloys

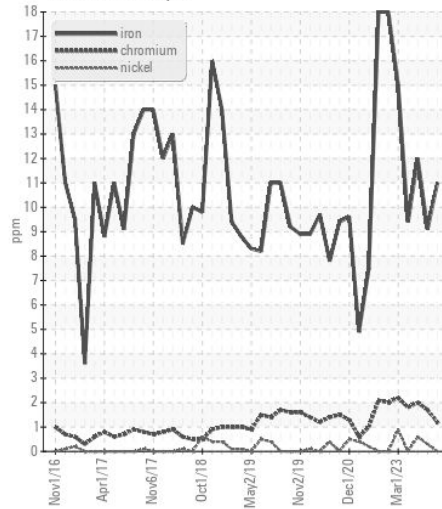


Non-ferrous Metals

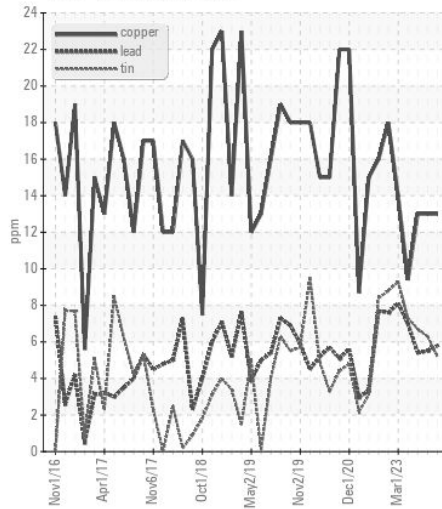

Viscosity @ 100°C

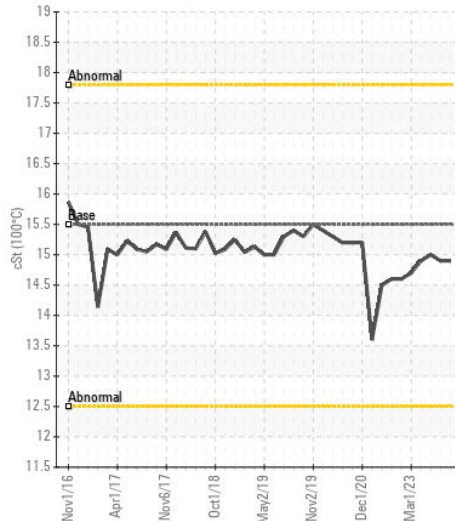

Base Number

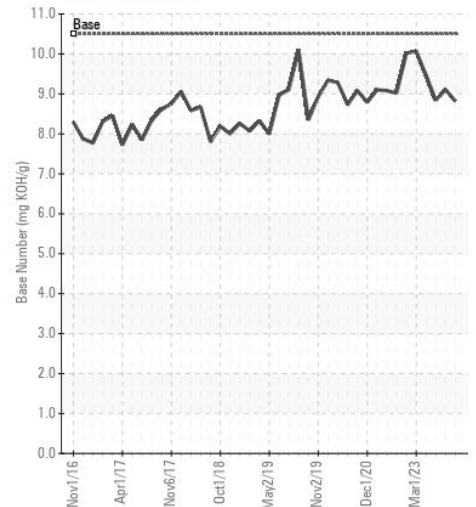

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0071057

Lab Number : 06234035

Unique Number : 11122869

Test Package : MAR 2

Received : 11 Jul 2024

Tested : 12 Jul 2024

Diagnosed : 12 Jul 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ALLEN WILLHELM

allen.willhelm@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)